


CLIENT: U.S. NAVY PARTY NO: 195 PROSPECT: BARROW COUNTY: NORTH SLOPE STATE: ALASKA COUNTRY: U.S.A. LEFT STORAGE: 630 ARRIVED FIELD: 845 LEFT FIELD: ARRIVED STORAGE: DATE: 5-13-72 OBSERVER: Orand PAGE: 1 of 2

LINE	PROFILE	IDENTIFICATION		SHOT CAL	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	SP. OFFSET	NO. 1 DIR.	CODE	SPREAD		S. POINT	S. DEPTH	COP SWITCH	SETUP	TAPE			GAIN						FILTERS		REMARKS							
		REEL NUMBER	FILE NUMBER					TOP	BOT.						SAMPLE RATE MS	RECORD LENGTH					PARITY ERRORS	MODE	INITIAL GAIN (DB)						FINAL GAIN DB	RELEASE RATE	TRIP DELAY AUTO		HIGH CUT FREQ.	LOW CUT FREQ.	SLOPE	NOTCH IN/OUT			
D	15	149	633	4MG	DPB	900	25	47	60	2		0	NE	10	G						X	S	OPERATE	36	36	42	43	54	42	50	FAST	192	62	E	18	-	47		
	14	150	634			905																																	
	13	164	635			910																																	
	12	172	636			915																																	
	11	180	637			920																																	
	10	188	640			945																																	
	9	196	641			1000																																	
	8	204	642			1005																																	
	7	212	643			1100																																	
	6	220	644			1130																																	
	5	228	645			1145																																	
	4	236	646			1200	15																																
	3	244	647			1210																																	
	2	252	650			1220																																	
	1	260	651			1230																																	

END OF LINE D

SEISMOMETER AND SPREAD INFORMATION						
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
HSJ	12	20		INLINE	110	INLINE
1						

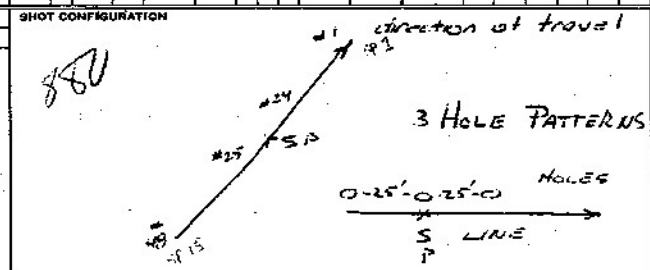

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB
 UPPER SET LIMIT 75 %
 LOWER SET LIMIT 25 %
 FORMAT TYPE:
 9 TRACK 21 TRACK
 GALVO LEVEL:
 1-24 21 DB AUX 21 DB
 OTHER:

MISCELLANEOUS INFORMATION:
 see also Thur rec 632
 daily tests

AGENCY: **U.S. Navy** PARTY NO: **195** PROJECT: **BARROW** COUNTY: **NORTH SLOPE** STATE: **ALASKA** COUNTRY: **U.S.A** LEFT STORAGE: **630** ARRIVED FIELD: **800** LEFT FIELD: ARRIVED STORAGE: DATE: **5-12-72** OBSERVER: **Orand**


LINE	PROFILE	IDENTIFICATION		SHOT CAL	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	SP. OFFSET	NO. 1 DIR.	CODE	SPREAD				SETUP	TAPE		GAIN						FILTERS			REMARKS		
		REEL NUMBER	FILE NUMBER					TOP	BOT.						NO. 2 DIR.	NO. 3 DIR.	NO. 4 DIR.	NO. 5 DIR.		SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)						LOW CUT		NOTCH	
		1-24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	FREQ.	SLOPE	IN	OUT	
D	21	100 USN-8	610		DPB	600	25	47	2	0	NE	10	0																			Dead Traces	
	20	128	611			615																											
	19	116	612			630																											
	18	124	613			645																											
	17	132	614			700																											
	16	140	615			715																											
	15																																

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
	HSJ	12	20	INLINE	110	INLINE
	14					

2505'-55'-0'-55'-2505'

49 - 25 - SP - 24 - 1
(group centers)

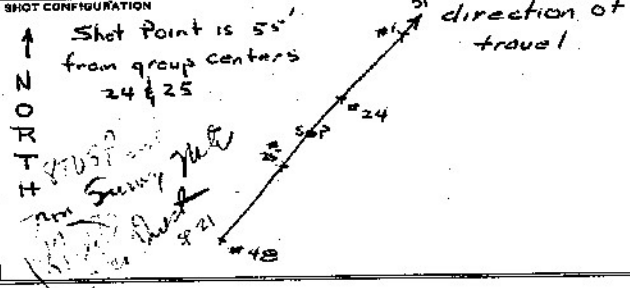

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB

UPPER SET LIMIT 75 %

LOWER SET LIMIT 35 %

FORMAT TYPE:

9 TRACK 21 TRACK

GALVO LEVEL:

1-24 21 DB AUX 21 DB

OTHER:

MISCELLANEOUS INFORMATION:

USN-8 has Sp 16 thru Sp 23 for line C also

Between 18-19 9 FLAGS and 8 groups