RECORDER FIELD DATA TI-13238-A

DFS III SYSTEM

CLIENT	PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE
U.S. NAVY	195	BARROW	NORTH SLOPE	ALASKA	U.S.A.	700	915	1830	2000	5-14-72	Orand	2 of 2

IDENTIFICATION							SHOT					SPREAD						TAPE					GAIN									FILTERS				REMARKS
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT / CAL.	PLAY BACK	TIME	SIZE	TOP / BOT.	NO. CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. SEIS OFFSET	SEIS DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS 1	2	4	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB) 1-4/24	5-8	9-12	13-16	17-20	21-24	FINAL GAIN DB	RELEASE RATE	TRIP DELAY AUTO	HIGH CUT FREQ.	LOW CUT FREQ.	LOW CUT SLOPE	NOTCH IN / OUT	DEAD TRACES
F	1	USN-11	736	SHOT	DPB	1700	25	47 / 60	2		0	E		10	0				1		5	OFF	RATE	30	36	42	48	54	42	90	FAST	192	62	8	18	—	48 thur 33 & 17
	2	[illegible]	737			1715																															48 thur 41
	3	[illegible]	740			1745																															
	4	[illegible]	741			1755																															
	5	[illegible]	742			1810																															
	6	[illegible]	743			1820																															
	7	[illegible]	744			1830																															

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
	HSJ 14	12	20	INLINE	110	INLINE

SHOT CONFIGURATION

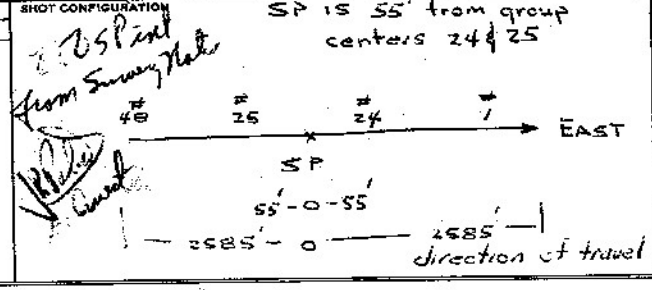

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB
UPPER SET LIMIT 75 %
LOWER SET LIMIT 25 %
FORMAT TYPE:
☐ 9 TRACK ☒ 21 TRACK
GALVO LEVEL:
1-24 21 DB AUX 21 DB
OTHER:

MISCELLANEOUS INFORMATION:

1

TR = 4.0
Rec = 11.0

7am 9am — 6P 8OP
1800

TR = 4
Rec = 9

RECORDER FIELD DATA TI-12258-A

DFS III SYSTEM

CLIENT	PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE
U.S. NAVY	195	BARROW	NORTH SLOPE	ALASKA	U.S.A.	700	900	6P	800	5-15-72	Orand	1

IDENTIFICATION							SHOT					SPREAD					TAPE					GAIN									FILTERS			REMARKS
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT / CAL	PLAY BACK	TIME	SIZE	TOP / BOT	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	GP. OFFSET	SEIS. DEPTH	COP SWITCH	SETUP	SAMPLE RATE MS 1	2	4	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB) 1-12/24	0-8	9-16	13-16/17-20/21-24	FINAL GAIN DB	RELEASE RATE	TRIP DELAY AUTO	HIGH CUT FREQ.	LOW CUT FREQ.	LOW CUT SLOPE	NOTCH IN / OUT	Beg of Traces
F	8	USN-11	762	SHOT	DPB	915	25	47 / 60	2		0	E		10	0				X		5	OPERATE	30	36	42	48 / 54 / 42	90	FAST	192	62	8	18	—	
	9		763			925																												
	10		764			935																												
	11		765			945																												5
	12		766			1015																												13
	13		767			1030																												
	14		770			1050																												6 45-46-47-48
	15		771			1110																												14
	16		772			1130																												
	17		773			1215																												
	18		774			1230																												
	19		775			1240																												
	20		776			1250																												
	21		777			1300																												3
	22	USN-12	1000			1330																												11
	23		1001			1345																												19
	24		1002			1400																												✓
	25		1003			1410																												
	26		1004			1425																												
	27		1005			1440																												
	28		1006			1450																												
	29		1007			1455																												
	30		1010			1505																												
	31		1011			1515																												3
	32		1012			1525																												11
	33		1013			1600																												
	34		1014			1610																												30
	35		1015			1620																												1 Hour @
	36		1016			1630		END OF TIME																										1 Hour 16

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
	HSJ 14	12	20	INLINE	110	INLINE

2585'-55'-0-55'-2585'

SHOT CONFIGURATION

SP 880 ft

55' from sp to ground contacts 24 & 25

#48 #25 #24 #1

SP

direction of travel

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB
UPPER SET LIMIT 75 %
LOWER SET LIMIT 25 %
FORMAT TYPE:
☐ 9 TRACK ■ 21 TRACK
GALVO LEVEL:
1-24 21 DB AUX 21 DB
OTHER:

MISCELLANEOUS INFORMATION:

745 thur 761
daily tests

FILE