

CLIENT: U.S.N. PARTY NO: 186 PROSPECT: ZONE A NPP4 ALASKA STATE: ALASKA COUNTRY: U.S.A. LEFT STORAGE: 7:00 ARRIVED FIELD: 8:30 LEFT FIELD: 6:00 ARRIVED STORAGE: 7:00 DATE: 4-8-74 OBSERVER: Frank Fiddler

LINE	PROFILE	IDENTIFICATION		SHOT CAL.	PLAY BACK	TIME	SHOT				SPREAD				TAPE				GAIN								FILTERS			REMARKS			
		REEL NUMBER	FILE NUMBER				SIZE	TOP BOT.	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.E. OFFSET	SEIS DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)						FINAL GAIN DB	RELEASE RATE		TRIP DELAY	HIGH CUT FREQ.	LOW CUT
																				1-4/24	5-8	9-12	13-16	17-20	21-24				FREQ.	SLOPE			
12	1	526548	013	1A			50	60/75	2		NE		1-49	✓	5566	B.6	30	30	30	36	42	42	90	MEIO	256	124	8	36	OUT	Shooting into spread.			
	2		014	2A			50	60/75	2				1-79																				
	3		015	3A			50	60/75	2				1-49																				
	4		016	4A			50	60/75	2				2-49																				
	5		017	5A			50	60/75	2				5-53																				
	6		020	6A			50	60/75	2				9-57																				
	7		021	7A			50	60/75	2				13-61																				
	8		022	8A			50	60/75	2				17-65																				
	9		023	9A			50	60/75	2				21-69																				
	10		024	10A			50	60/75	2				25-73																				
	11	026	025	11A			50	60/75	2				29-77																				
	12		027	12A			50	60/75	2				33-81																				
	13		030	13A			50	60/75	2				37-85																				
	14		031	14A			50	60/75	2				41-89																				
	15		032	15A			50	60/75	2				45-93																				
	16		033	16A			50	60/75	2				1-49																				
SKIP	17		034	17A			50	60/75	2				1-79																				
	18		034	18A			50	60/75	2				5-53																				
	19		035	19A			50	60/75	2				9-57																				
	20		036	20A			50	60/75	2				13-61																				

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
Edentech		9	15'	1 STRING OF NINE LAYED INLINE	330'	48 24 / 24

SHOT CONFIGURATION

1 HOLE.

Centre #one X 330' S.P. = Centre #2 X 330'

Shooting fr. NE → SW

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB

UPPER SET LIMIT 62.5 %

LOWER SET LIMIT 18.75 %

FORMAT TYPE:

9 TRACK 21 TRACK

GALVO LEVEL:

1-24 18 DB AUX 15 DB

OTHER:

MISCELLANEOUS INFORMATION:

DRD R#001 TO 004

TEST TIB R#005 TO 012

Radio trouble tone box trouble started shooting 1:30, no spread

CLIENT: U.S.N. PARTY NO.: 186 PROJECT: 2025N NPH4 ALASKA COUNTY: ALASKA COUNTRY: U.S.A. LEFT STORAGE: 7:00 ARRIVED FIELD: 8:00 LEFT FIELD: ARRIVED STORAGE: DATE: 4-10-74 OBSERVER: Frank Liddle PAGE: 1 of 2

LINE	PROFILE	IDENTIFICATION		SHOT CAL	PLAY BACK	TIME	SIZE	SHOT			S.P. OFFSET	NO. 1 DIR.	SPREAD			SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	GAIN						FILTERS			REMARKS					
		REEL NUMBER	FILE NUMBER					TOP	NO CAPS	CODE			SEIS. OFFSET	SEIS. DIST.	COP SWITCH					SETUP	INITIAL GAIN (DB)						LOW CUT	NOTCH						
								BOY													1-4/24	3-8	9-12	13-16	17-20	21-24	FINAL GAIN DB	RELEASE RATE		TRIP DELAY	HIGH CUT FREQ.	FREQ.	SLOPE	IN
12	29	526449	7A	1A			50	60/75	2		NE		1-44	1	✓	55cc	B.G	36	36	36	36	42	42	90	MED	266	124	8	36	OUT				
	30		100	2A			50	60/75	2							5-53																		
	31	102	101	3A			50	60/75	2							9-57																		
	32		103	4A			50	60/75	2							13-61																		
	33		104	5A			50	60/75	2							17-65																		
	34		105	6A			50	60/75	2							21-69																		
	35		106	7A			50	60/75	2							25-73																		
	36		107	8A			50	60/75	2							29-77																		
	37		107	9A			50	60/75	2							29-77																		
	38		110	10A			50	60/75	2							33-81																		
	39		111	11A			50	60/75	2							37-85																		
	40		112	12A			50	60/75	2							41-89																		
	41		113	13A			50	60/75	2							45-93/49																		
	42		114	14A			50	60/75	2							5-53																		
	43		115	15A			50	60/75	2							9-57																		
	44		116	16A			50	60/75	2							13-61																		
	45		117	17A			50	60/75	2							17-65																		
	46		120	18A			50	60/75	2		330' NE					21-69																		
	47		121	19A			50	60/75	2							25-73																		
	48		122	20A			50	60/75	2		336' NE					29-77																		
	49		123	21A			50	60/75	2							53-8																		
	50		124	22A			50	60/75	2							25-73																		
	51		125	23A			50	60/75	2							29-77																		
	52		126	24A			50	60/75	2							33-81																		
	53		127	25A			50	60/75	2							37-85																		
	54		130	26A			50	60/75	2							37-85																		
	55		131	27A			50	60/75	2							37-85																		
	56		132	28A			50	60/75	2							37-85																		

SKIP

526518


Powder did not all fire
NO 'uphol'

moving Recorder

moving Recorder

104 OH
Shooting out of spread 12 group and spread #48 DEAD

SEISMOMETER AND SPREAD INFORMATION				
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN
Electrotech	10Hz	9	15'	1 string of nine InLine

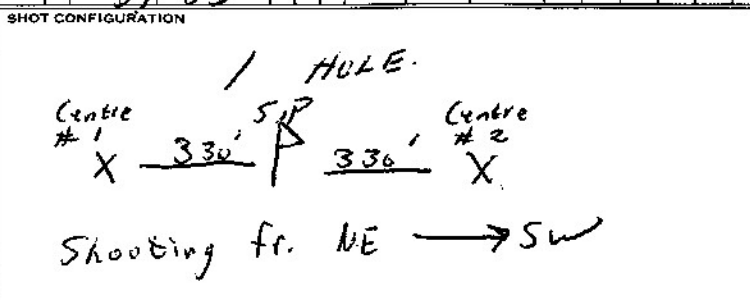

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB

UPPER SET LIMIT 12.5 %

LOWER SET LIMIT 18.75 %

FORMAT TYPE:

9 TRACK 21 TRACK

GALVO LEVEL:

1-24 18 DB AUX 15 DB

OTHER:

MISCELLANEOUS INFORMATION:

DRD R#727075

TEST T.B R#76

END OF LINE COMPLETE

PICK-UP OF LINE