

DI-17-U-110

RECORDER FIELD DATA T1-12238-A

CLIENT: U.S. NAVY    PARTY NO: 186    PROSPECT: N.P.R. 4    COUNTY:    STATE: ALASKA    COUNTRY:    LEFT STORAGE: 700    ARRIVED FIELD: 830    LEFT FIELD:    ARRIVED STORAGE: 2000    DATE: 12-4-74    OBSERVER: B.J. Orand    PAGE: 1 of 1

LINE	PROFILE	IDENTIFICATION		SHOT	PLAY BACK	TIME	SIZE	SHOT		SPREAD				TAPE		GAIN								FILTERS		REMARKS							
		REEL NUMBER	FILE NUMBER					NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	P. SEIS OFFSET	S. DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)								RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT	NOTCH
																1-4/24	5-8	9-12	13-16	17-20	21-24	FINAL GAIN DB			Auto	124	FREQ.	SLOPE	IN	OUT			
D1	0	D10	645	SNAG	DPB	1500	50	50/60	2	inline	SW	5	0	1/87	3	1	5	OPERATE	42	48	54	60	66	66	90	FAST	512	124	8	36	-	Windy	
	1		646			1415								1/83																	#1 dead		
	2		647			1430								1/29																	#5 dead		
	3		651			1445								1/25																	#4 dead		
	4		652			1500								1/21																	#13 dead		
	5		653			1515								1/17																	#17		
	6		654			1530								1/13																	#21		
	7		655			1545								1/9																	#40 dead		
	8		656	1		1715								1/45	13																11 & 42 dead Very		
	9		657	31		1730								1/41																	15 & 32 weak Windy		
	10		660			1745								1/37																	17 dead		
	11		SKIP			1800								1/33																			
	12		SKIP			1815								1/29																			
	13		SKIP			1830								1/25																			
	14		661			1845								1/21																		#1 dead	
	15		662			1900								1/17																		#4 dead Windy	

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
	14 cycle	9	14.5	inline	330	inline
					1320	S.P. INT

SHOT CONFIGURATION

Pushing trace #1  
 S.A located 330' each side of group 24 & 25

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB  
 UPPER SET LIMIT 75 %  
 LOWER SET LIMIT 25 %  
 FORMAT TYPE:  
 9 TRACK     21 TRACK  
 GALVO LEVEL:  
 1-24 15 DB    AUX 18 DB  
 OTHER:

MISCELLANEOUS INFORMATION:

rec 632 → filter pulse  
 rec 633 → 642 dnd  
 rec 643 → REC up  
 rec 644 test t.b.  
 rec 650 omit




IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN				FILTERS			REMARKS																		
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL.	PLAY BACK	TIME	SIZE	TOP BOT.	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.D. OFFSET	SEIS. DEPTH	COP SWITCH	SETUP	SAMPLE RATE MS				RECORD LENGTH		PARITY ERRORS	MODE	INITIAL GAIN (DB)				FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH IN/OUT					
																		1	2	4	1-4/24					5-8	9-12	13-16	17-20					21-24	FREQ.		SLOPE				
-D	16	10-D	904	A		12:30	1X50	60/75	2			SW					1/29	1	✓	5			OPER.	66/47	66/48	66/47	52/47	44/46	22/46	90	FAST	5/2	15	7	36		FIRST SHOT SAY TO (S... ) / A1 DEE 23" 45"				
	17		705			2:30	1X50	60/75	2								1/25																								
	18		706			12:55	1X50	60/75	2								1/41																								
	19		707				1X50	60/75	2								1/37																								
	20		710			13:15	1X50	60/75	2								1/33																								
	21		911				1X50	60/75	2								1/29																								
	22		712			13:35	1X50	60/75	2								1/25																								
	23		713				1X50	60/75	2								1/21																								
	24		714			13:55	1X50	60/75	2								1/17																								
	25		715			14:05	1X50	60/75	2								1/13																								
	26		716			15:15	1X50	60/75	2								NO UN. 1/25																								
	27		717			15:25	1X50	60/75	2								1/41																								
	28		720				1X50	60/75	2								1/37																								
	29		721			15:45	1X50	60/75	2								1/33																								
	30		721	722		16:00	1X50	60/75	2								1/29																								
	31		722	723		16:15	1X50	60/75	2								1/25																								
	32		723	724		16:30	1X50	60/75	2								1/21																								
	33		724	725		16:45	1X50	60/75	2								1/17																								
	34		725	726		17:00	1X50	60/75	2								1/13																								
	35		726	727		17:15	1X50	60/75	2								1/9																								

915 319

CHANGE TAPE

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.
	1470	9	145	INLINE	350

SPREAD PATTERN	
48 TRP SPLIT.	600%

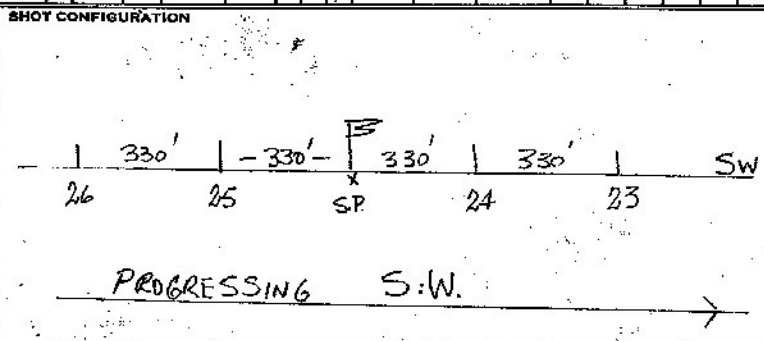

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB

UPPER SET LIMIT 75 %

LOWER SET LIMIT 25 %

FORMAT TYPE: T1AC

9 TRACK  21 TRACK

GALVO LEVEL:

L-24 21 DB AUX 15 DB

OTHER:

MISCELLANEOUS INFORMATION:

FILE - 677 - 702 DRD


1117 - 703 TTB

IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN						FILTERS			REMARKS																		
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL	PLAY BACK	TIME	SIZE	TOP BOT.	NO CAPS	CODE	SP OFFSET	NO. 1 DIR.	CODE	SEIS. OFFSET	SEIS. DEPTH	COP SWITCH	SETUP	SAMPLE RATE MS				RECORD LENGTH	PARITY ERRORS	MODE		INITIAL GAIN (DB)						FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH					
																		1	2	4	1-4/24					5-8	9-12	13-16/7-20	21-24	FREQ.	SLOPE					IN	OUT						
1-0	36	150	736			10:15	N50	60/75	2			SW					1/25	1	✓	5			OFF	27/66	27/66	54/132	54/132	27/66	27/66	90	FAST	512	124	2	25			#28-DRD					
	37		737				N50	60/75	2								1/21						1-800																				
	38		740				N50	60/75	2								1/37																										
	39		741			12:35	N50	60/75	2								1/33																										
	40		742			11:00	N50	60/75	2								1/29																										
	41		743				N50	60/75	2								1/25																										
	42		745	744	ME	1:00	N50	60/75	2								1/21																										
	43		746				N50	60/75	2								1/17																										
	44		747			12:00	N50	60/75	2								1/13																										
	45		750				N50	60/75	2								1/9																										
	46		751			1:15	N50	60/75	2								1/5																										

2514320

1-0

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	SPREAD PATTERN
AN	9	145	INLINE	330'	48 GR. SPRT 60%

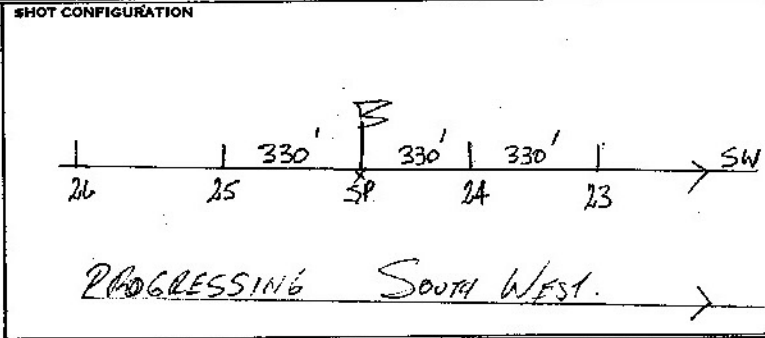

DFS III SYSTEM PARAMETERS:  
 GAIN CONSTANT 30 DB  
 UPPER SET LIMIT 75 %  
 LOWER SET LIMIT 25 %  
 FORMAT TYPE: TIAC  
 9 TRACK  21 TRACK  
 GALVO LEVEL:  
 1-24 21 DB AUX 15 DB  
 OTHER:

MISCELLANEOUS INFORMATION:  
 F-730 WRITE ONES  
 F-731-34 DRD.  
 F-735-778.