


21-74-B-84

CLIENT **NAVY** PARTY NO. **184** PROSPECT **NAVY (ZONE A) NPT-4 ALASKA-1974** COUNTY STATE **ALASKA** COUNTRY **USA** LEFT STORAGE **700** ARRIVED FIELD **7:30** LEFT FIELD **8:00** ARRIVED STORAGE **8:30** DATE **MAR 23/74** OBSERVER **Vic Donald** PAGE **2 of 2**

IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN				FILTERS			REMARKS													
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL.	PLAY BACK	TIME	SIZE	TOP BOT.	NO. CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S. P. OFFSET	C.D.P. SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)					FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH				
																					1-4/24	5-8		9-12	13-16/7-20					21-24	FREQ.	SLOPE	IN	OUT		
21-74-184	1	52317	671	A	AAW		50	57/75	2	⊙		SE	⊙	10'	7	1/5	⊙	✓	5SEC		OP													SHOOTING INTO SPREAD WITH 12GAPS TAILSPREAD		
	2		672				50	57/75	2						7	1/5																				
	3		673				50	57/75	2						8	1/5																				
	4		674				50	57/75	2						6	1/5						66	66	66	66	66	98		896							
	5		675				50	57/75	2						7	1/9						48	60	66	66	66	66									
	6		676				50	57/75	2						6	1/3																				
	7		677				50	57/75	2						5	1/7																				
	8		700				50	57/75	2						6	1/21																				
	9		701				50	57/75	2						7	1/25																				
	10		702				50	57/75	2						7	1/29																				
	11		703				50	57/75	2						7	1/33																				
	12		704				50	57/75	2						8	1/37																				
	13		705				50	57/75	2						7	1/41																				
	14		706				50	57/75	2						7	1/45																				

TR#47-48 DEAD- CABLES
GOT UNPLUGGED SHORTED
TA#48 SHORTED
TA#44 SHORTED

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.
⊙	TAPERED ARRAY	9	15'	INLINE	330'
					48 GROUPS INLINE 24/24 SPLIT NO GAP.

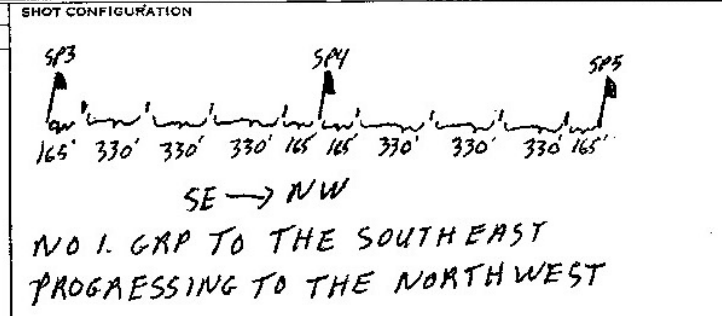

DFS III SYSTEM PARAMETERS:	MISCELLANEOUS INFORMATION:
GAIN CONSTANT <u>30</u> DB	
UPPER SET LIMIT <u>62.5</u> %	
LOWER SET LIMIT <u>18</u> %	
FORMAT TYPE: <input type="checkbox"/> 9 TRACK <input checked="" type="checkbox"/> 21 TRACK	
GALVO LEVEL: 1-24 <u>24</u> DB AUX <u>21</u> DB	
OTHER:	


CLIENT: **NAVY** PARTY NO: **184** PROSPECT: **NAVY(ZONER)NPA-4** COUNTY: **ALASKA** STATE: **ALASKA** COUNTRY: **USA** LEFT STORAGE: **700** ARRIVED FIELD: **8:00** LEFT FIELD: **5:30** ARRIVED STORAGE: **6:00** DATE: **MAR 24/74** OBSERVER: **Vic Donald** PAGE: **1 of 1**

LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL.	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. 165' 165'	SPREAD	CDP SWITCH	SETUP	TAPE				MODE	GAIN						FILTERS			REMARKS					
								TOP	BOT.										SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	INITIAL GAIN (DB)						FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH				
																			1	2	4										FREQ.	SLOPE	IN	OUT				
21-74184	15	12347	720	A	RAW		50	57/75	2	0		180' NSW	0	10'	8	1/5	0		5 SEC		OP																	
	16		721				50	57/75	2																													
	17		722				50	57/75	2																													
	18		723				50	57/75	2																													
	19		724				50	57/75	2																													
	20		725				50	57/75	2																													
	21		726				50	57/75	2																													
	22		727				50	57/75	2																													
TAPE CHANGE																																						
	23		730				50	57/75	2																													
	24		731				50	57/75	2																													
	25		732		RAW DOB		50	57/75	2																												EV# 732-MISSFIRE	
	26		734				50	57/75	2																													
	27		735				50	57/75	2																													
	28		736				50	57/75	2																													
	29		737				50	57/75	2																													

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
0		9	15'	INLINE	330'	48 GROUPS INLINE 24/24 SPLIT NO GAP

TRIMMED ARRAY

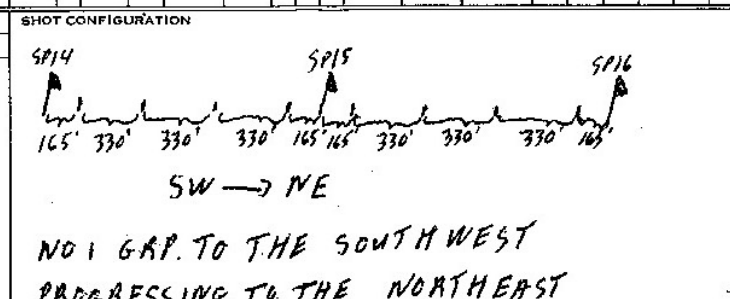

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT	30 DB
UPPER SET LIMIT	62.5 %
LOWER SET LIMIT	18 %
FORMAT TYPE:	<input type="checkbox"/> 9 TRACK <input checked="" type="checkbox"/> 21 TRACK
GALVO LEVEL:	1-24 24 DB AUX 21 DB
OTHER:	


MISCELLANEOUS INFORMATION:

EV# 707-716 - DRD TEST
EV# 717- TEST T.B.

CLIENT: **NAVY** PARTY NO.: **184** PROSPECT: **NAVY (ZONE A) NA-4 ALASKA-1974** COUNTY: **ALASKA** STATE: **ALASKA** COUNTRY: **USA** LEFT STORAGE: **700** ARRIVED FIELD: **800** LEFT FIELD: **530** ARRIVED STORAGE: **630** DATE: **MAR 25/74** OBSERVED: **Nic Donald** PAGE: **1 of 1**

LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT IDENTIFICATION	PLAY BACK	TIME	SIZE	SHOT				SPREAD				TAPE				GAIN								FILTERS			REMARKS								
								TOP	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. OFFSET	CDP SWITCH	SETUP	SAMPLE RATE MS				RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)								RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH		
																	1	2	4	1-4				5-8	9-12	13-16	17-20	21-24	FINAL GAIN DB	FREQ.					SLOPE	IN	OUT		
21-74-184	30	523448	751	A	RAW		50	57/75	2	0	SW	10'	8	1/17	1	✓	5SEC	OP	54	54	54	54	54	48	120	FNST	312	124	8	36	04T								
	31		752				50	57/75	2					7	1/21																								
	32		753				50	57/75	2					8	1/25																								
	33	331344	754	35 SKIPS			50	57/75	2					8	1/33																	COVERAGE SHOT FOR SP33 - ROLL-A-LONG # SP34							
	34		755				50	57/75	2					8	1/41																	COVERAGE SHOT FOR SP34 - ROLL-A-LONG # SP36							
	36		756				50	57/75	2					8	1/43																								
	36/35		757				50	57/75	2					8	1/33																		COVERAGE SHOT FOR SP35 - ROLL-A-LONG # SP34						
	37		760				50	57/75	2					7	1/45					60	60	60	60	48															
	38		761				50	57/75	2					7	1/49					48	60	60	60	60															
	39		762				50	57/75	2					7	1/5																								
	40		763				50	57/75	2					6	1/9																								
	41		764				50	57/75	2					7	1/13																								
	42		765				50	57/75	2					7	1/17																								
	43		766				50	57/75	2					8	1/21																								
	44		767				50	57/75	2					7	1/25																								
	45		770				50	57/75	2					6	1/29																								
	46		771				50	57/75	2					6	1/33																								
	47		772				50	57/75	2					6	1/37																								
	48		773				50	57/75	2					6	1/41																								
	49		774				50	57/75	2					6	1/45																								
	50		775				50	57/75	2					5	1/49																								

SEISMOMETER AND SPREAD INFORMATION				SHOT CONFIGURATION	
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.
①	TAPERED ARRAY	9	15'	48 GAPS INLINE 24/24 SPLIT NO GAP	330'

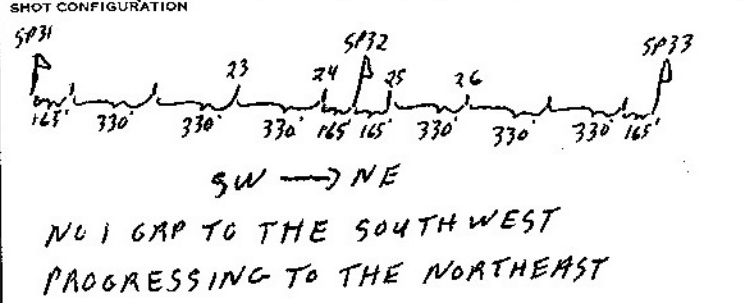

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT: 30 DB

UPPER SET LIMIT: 62.5 %

LOWER SET LIMIT: 78 %

FORMAT TYPE:
 9 TRACK 21 TRACK

GALVO LEVEL:
 1-24 24 DB AUX 21 DB

OTHER:

MISCELLANEOUS INFORMATION:

EV # 746-747 PAD TEST


EV # 750-TEST 4B

WAIT ON DRILL-SURVEYORS

CLIENT: NAVY PARTY NO: 184 PROSPECT: NAVY (ZONE A) NPA-4 COUNTY: ALASKA COUNTRY: USA LEFT STORAGE: 700 ARRIVED FIELD: 8:00 LEFT FIELD: 630 ARRIVED STORAGE: 730 DATE: MMA 26/74 OBSERVER: Vic Donald PAGE: 1 of 1

LINE	IDENTIFICATION				SHOT CAL	PLAY BACK	TIME	SHOT				SPREAD				TAPE				GAIN						FILTERS			REMARKS						
	PROFILE	REEL NUMBER	FILE NUMBER	NO. CAPS				NO. DIR.	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	SPREAD	NO. OF GROUPS	NO. OF GROUPS	NO. OF GROUPS	NO. OF GROUPS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)						FINAL GAIN DB	RELEASE RATE		TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH	
																					1-4	5-8	9-12	13-16	17-20	21-24					FREQ.	SLOPE	IN	OUT	
21-74-184	51	5274	1007	A	BAW	50	57/75	2	330'NE	SW	10'	6	1/5	0	5500	01	OP	48	60	60	60	60	60	60	120	F85T	1470	576	124	8	36	OUT			
	52		1010		(NITRAMON)	50	57/75	2	330'NE			6	1/9																						
	53		1011			50	57/75	2	330'NE			6	1/13																						
	54		1012		(NITRAMON)	50	57/75	2				6	1/7																						
	55		1013			50	57/75	2	310'W			7	1/21																						
	56		1014			50	57/75	2				6	1/25																						
	57		1015			50	57/75	2				6	1/29																						
	58		1016			50	57/75	2				8	1/33																						
	59		1017		(NITRAMON)	50	57/75	2				7	1/37																						
	60		1020			50	57/75	2				6	1/41																						
	61		1021			50	57/75	2				8	1/45																						
	62		1022			50	57/75	2				7	1/49																				TA# 47-SHORTED		
	63		1023			50	57/75	2				4	1/5	0																					
	64		1024			50	57/75	2				8	1/9													608									
	65		1025			50	57/75	2				6	1/13																						
	66		1026			50	57/75	2					1/17																						
	67		1027		SKIP-2 DEAD CAPS-UNABLE TO RELOAD								1/21																					EV#1027 MISSFIRE	
	68		1030			50	57/75	2				5	1/35																						
	69		1031		RE-RETRICLED	50	57/75	2				5	1/39																						EV#1032 MISSFIRE
	70		1033			50	57/75	2				5	1/29																						
	71		1034			50	57/75	2				5	1/33																						
	72		1035			50	57/75	2				5	1/37																						
	73		1036			50	57/75	2				4	1/41																						
			1037			50	57/75	2				5	1/45																						
TAPF CHANGE																																			

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	SPREAD PATTERN
0	TAPERED ARRAY	9	15'	INLINE	48 GROUPS INLINE 24/24 SPLIT NO GAP

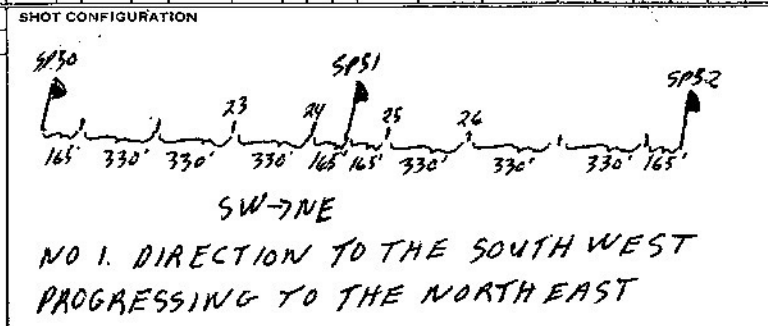

DFS III SYSTEM PARAMETERS:	MISCELLANEOUS INFORMATION:
GAIN CONSTANT 30 DB	EV# 776-1005 DRD TEST
UPPER SET LIMIT 62.5 %	EV# 1006-TEST TB.
LOWER SET LIMIT 18 %	
FORMAT TYPE:	
<input type="checkbox"/> 9 TRACK <input checked="" type="checkbox"/> 21 TRACK	
GALVO LEVEL:	
1-24 24 DB AUX 21 DB	
OTHER:	


21-74-0-184

CLIENT: NAVY PARTY NO: 184 PROSPECT: NAVY (ZONE A) NPA-4 COUNTY: ALASKA STATE: ALASKA COUNTRY: USA LEFT STORAGE: 700 ARRIVED FIELD: 7:30 LEFT FIELD: 12:00 ARRIVED STORAGE: 12:30 DATE: MAR 27/74 OBSERVER: Vic Donald PAGE: 1 of 1

LINE	IDENTIFICATION				SHOT CAL.	PLAY BACK	TIME	SHOT				SPREAD				TAPE				GAIN								FILTERS			REMARKS			
	PROFILE	REEL NUMBER	FILE NUMBER	NO. CAPS				CODE	S.P. OFFSET	NO. 1 DIR.	CODE	SEIS. OFFSET	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)								FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.		LOW CUT		NOTCH IN/OUT
																			1-4/24	5-8	9-12	13-16	17-20	21-24	FREQ.	SLOPE								
21-74-184	74	523449	1051	A	RAW		50	57/75	2	10	500SW	SW	10'	4	1/1	10	5 SEC	OP	66	66	66	66	60	48	120	FAST	AUTO	608	124	8	36	OUT		
	75	SKIP-LAKE					50	57/75	2										48	60	66	66	66	66										
	76	1052					50	57/75	2																									
	77	1053					50	57/75	2		50'W																896	COVERAGE SHOT FOR SP75, & SP74						
	77	SKIP-BAD CAPS			IN HOLE																						658							
	78	1055					50	57/75	2																									
	79	1064					50	57/75	2																									
	80	1065					50	57/75	2																									
	81	1066					50	57/75	2																									
	82	1067					50	57/75	2																									
	83	1070					50	57/75	3																									
	84	1071					50	57/75	3																		896						SHOOTING OUT OF SAREM	
	85	1072					50	57/75	3																		1088	-TX# 42 HEAD					WITH 12 CAPS TAIL SPA.	
	86	1073					50	57/75	3																		1536						PUE TO END OF LINE	
END OF LINE 21-74-184 - COMPLETE PICK-UP																																		

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
0	TAPERED ARRAY	9	15'	INLINE	330'	48 GROUPS INLINE 24/24 SPLIT NO GAP.

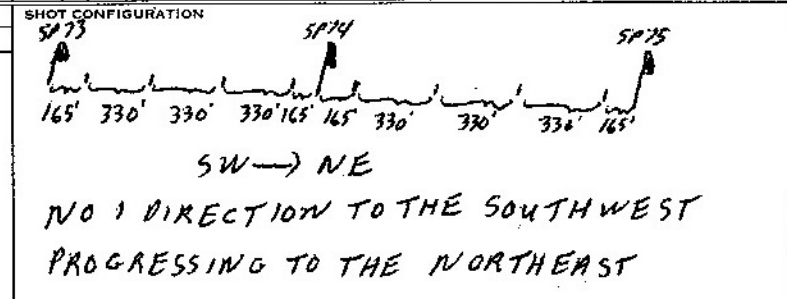

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB
 UPPER SET LIMIT 62.5 %
 LOWER SET LIMIT 14 %
 FORMAT TYPE:
 9 TRACK 21 TRACK
 GALVO LEVEL:
 1-24 24 DB AUX 31 DB
 OTHER:

MISCELLANEOUS INFORMATION:

EV#1040-1047 - DRD TEST
 EV#1050 - TEST T.B.
 EV#1056-1063 - BIASTER CHECKS (TB)
 WAIT ON DRILLS