

CLIENT: NAVY PARTY NO: 184 PROSPECT: NAVY(ZONEA)NPA-4 COUNTY: ALASKA STATE: ALASKA COUNTRY: USA LEFT STORAGE: 700 ARRIVED FIELD: 800 LEFT FIELD: 7:30 ARRIVED STORAGE: 8 DATE: MAR 14/74 OBSERVER: Vic Donald PAGE: 2082

LINE	IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN						FILTERS			REMARKS									
	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL.	PLAY BACK	TIME	SIZE	TOP BOT.	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	L. S. OFFSET	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)						FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH IN/OUT		
																					1-4/24	5-8	9-12	13-16	17-20						21-24	FREQ.		SLOPE	
24-74-184	46	523143	276	A	RAW		50	57/75	2	0		NWD	10	7	1/17	ⓐ	✓	5500			OP.	66	60	60	54	48	48	120	FAST	AUTO 576	124	8	18	04T	
	47		277				50	57/75	2													48	48	54	60	60	66								
	48		300				50	57/75	2																										
	49		301				50	57/75	2																										
	50		302				50	57/75	2																										
	51		SKIP-RIVER BRANCH-WATER.																																
	52		303				50	57/75	2																										
	53		304				50	57/75	2																										
	54		305				50	57/75	2																										

TR1-4-VEND

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

SAME AS PAGE 1082

SHOT CONFIGURATION

SHOT CONFIGURATION

SAME AS PAGE 1082

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB
 UPPER SET LIMIT 62.5 %
 LOWER SET LIMIT 16 %
 FORMAT TYPE:
 9 TRACK 21 TRACK
 GALVO LEVEL:
 1-24 24 DB AUX 21 DB
 OTHER:


MISCELLANEOUS INFORMATION:

RIVER BANK AT SP50.

CLIENT **NAVY** PARTY NO. **184** PROSPECT **NAVY (ZONE A) NPA-4 ALASKA-1974** COUNTY STATE **ALASKA** COUNTRY **USA** LEFT STORAGE **700** ARRIVED FIELD **8:00** LEFT FIELD DATE **MAX 15/74** OBSERVER **Vic Donald** PAGE **1 OF 2**

LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT		SPREAD										TAPE				GAIN						FILTERS			REMARKS										
				SHOT CAL.	PLAY BACK	TIME	SIZE	TOP BOT.	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. OFFSET	47 700	COP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)						FINAL GAIN DB		RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT FREQ.	SLOPE	NOTCH IN/OUT				
24-74-184	55	523113	311	A	RAW		50	57/75	2				NW	10'	4	Y35	10	5	5SR	OP	72	66	60	54	48	48	120	FAST	40 TO 650	124	8	18	OUT						
	56		312				50	57/75	2													48	48	54	60	66	72												
	57		313				50	57/75	2													72	72	66	60	54	48												
	58	523114	314				50	57/75	2													48	54	60	66	72	72												
	59		315				50	57/75	2																														
TAPE CHANGE																																							
	60	523144	316				50	57/75	2																								SHOOTING THROUGH SPREAD						
	61		317				50	57/75	2																								DUE TO END OF LINE						
	62		320				50	57/75	2																														
	63		321				50	57/75	2																														
	64		322				50	57/75	2																														
	65		323				50	57/75	2																														
END OF LINE 24-74-184 COMPLETE PICKUP AND MOVE TO LINE 31-74-184																																							
31-74-184	1	523144	325	A			50	57/75	2				SW	10'	7	1/1																		SHOOTING INTO SPREAD					
	2		326				50	57/75	2																									DUE TO START OF LINE					
	3		327				50	57/75	2																														
	4		330				50	57/75	2																										Line 31 SP 16-40				
	5		331				50	57/75	2																									See Pages 191-192 in Book #4					
	6	523144	332				50	57/75	2																														
	7		333				50	57/75	2																														
	8		334				50	57/75	2																														
	9		335				50	57/75	2																														
	10		336				50	57/75	2																														
	11		337				50	57/75	2																														
	12		340				50	57/75	2																														
	13		341				50	57/75	2																														
	14		342				50	57/75	2																														
	15		343				50	57/75	2																										NO-UPHOLE				

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	SPREAD PATTERN
①	TAPERED ARRAY	9	15'	INLINE	48 GRPS INLINE 24/24 SPLIT NO GAP

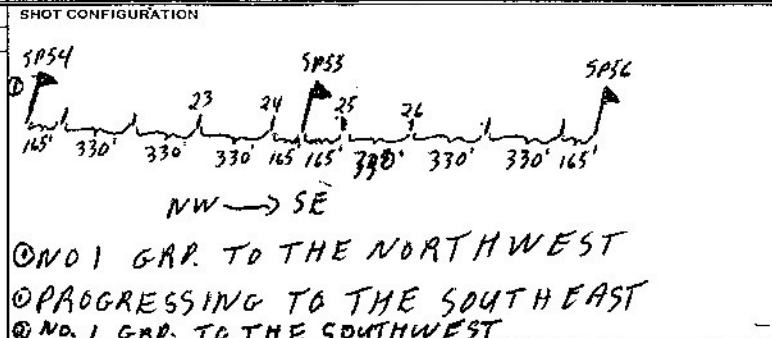

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB
 UPPER SET LIMIT 62.5 %
 LOWER SET LIMIT 18 %
 FORMAT TYPE:
 9 TRACK 21 TRACK
 GALVO LEVEL:
 1-24 24 DB AUX 21 DB
 OTHER:

MISCELLANEOUS INFORMATION:

EV#306 +307 INST. NOISE TEST
 EV#310 TEST T.B.
 EV#324 - MISSFIRE