

CLIENT: C.S.N. PARTY NO: 186 PROSPECT: N.P.R-4 COUNTY: NORTH SLOPE STATE: ALASKA COUNTRY: USA LEFT STORAGE: 07:00 ARRIVED FIELD: 07:45 LEFT FIELD: 5:00 ARRIVED STORAGE: 6:00 DATE: 5-4-74 OBSERVER: D.O. OSYH PAGE: 1 OF 1

LINE	PROFILE	IDENTIFICATION		SHOT CAL.	PLAY BACK	TIME	SHOT				SPREAD				TAPE				GAIN				FILTERS		REMARKS											
		REEL NUMBER	FILE NUMBER				SIZE	TOP BOT.	NO CAPS	CODE	S.P. OFFSET	NO. DIR.	CODE	S.P. OFFSET	SEIS. DEPTH	COP SWITCH	SETUP	SAMPLE RATE MS			RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)				FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH IN		
																		1	2	4				1-4/24		5-9	9-12					13-18	17-20		21-24	FREQ.
74-1	89	525 554	163	1150	65/75	2							N			1/4B	1	✓	S	OPER	24	24	24	36	36	36	90	MED.	4.70	124	B	36				
	90		164	1150	65/75	2										1/4A																				
	91		165	1150	65/75	2										1/40																				
	92		166	1150	65/75	2										1/36																				
	93		167	1150	65/75	2										1/32																				
	94		170	1150	65/75	2										1/2B																				
	95		191	1150	65/75	2										1/24																				
	96		172	1150	65/75	2										1/20																				
	97		173	510	15'	5										1/16																				
	98		174	510	15'	5										1/12																				
	99		175	510	15'	5										1/8																				
	100		176	1150	65/75	2										1/4																				
EAST		TAPES CHANGE		PICK-UP		SPREAD		MOVE		TO LINE		74-32																								
74-32	1	526 555	002	1150	65/75	2							E			48/46	7																			
	2		003	1150	65/75	2										48/40																				
	3		004	1150	65/75	2										48/48																				
	4		005	1150	65/75	2										48/49																				
	5		006	1150	65/75	2										48/53																				
	6		007	1150	65/75	2										48/57																				
	7		010	510	15'	5										48/61																				
	8		011	1150	65/75	2										48/65																				
	9		012	1150	65/75	2										48/69																				
	10		013	1150	65/75	2										48/73																				
	11		014	1150	65/75	2										48/77																				
	12		015	1150	65/75	2										48/81																				
	13		016	1150	65/75	2										48/85																				
	14		017	1150	65/75	2										48/89																				
	15		020	1150	65/75	2										48/93																				
	16		021	1150	65/75	2										48/96																				

Line 7 SP 1-82
See Page 39 in
Book # 1.

#2 DEAD

9 - "

13 - "

17 - "

21 - "

#2 DEAD LAST SHOT.


12 GAP TAIL SPREAD

NO GAP.

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
	10m	9	15'	INLINE	330'	48 GRP SPACIT. 600%

SHOT CONFIGURATION

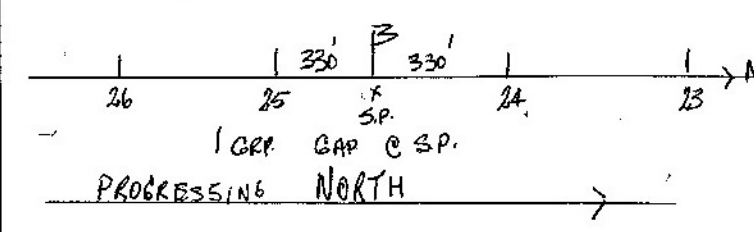

DFS III SYSTEM PARAMETERS:
GAIN CONSTANT 30 DB
UPPER SET LIMIT 625 %
LOWER SET LIMIT 18 %
FORMAT TYPE: T1AC
 9 TRACK 21 TRACK
GALVO LEVEL:
1-24 12 DB AUX 15 DB
OTHER:

MISCELLANEOUS INFORMATION:
DRD-156-161
F-162 T18
TAPE 326555 F-001 WRITE ONES.

CLIENT: A.S.N. PARTY NO: 186 PROSPECT: ZONE II NPP4 COUNTY: ALASKA STATE: U.S.A. LEFT STORAGE: 7:00 ARRIVED FIELD: 8:00 LEFT FIELD: 5:30 ARRIVED STORAGE: 6:50 DATE: 5-5-74 OBSERVER: FRANK FIDLER PAGE: 10/1

IDENTIFICATION				SHOT										SPREAD										TAPE										GAIN										FILTERS				REMARKS
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL	PLAY BACK	TIME	SIZE	TOP BOT.	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	SURF. SLOPE	DEPTH OFFSET	SEIS. DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)					FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH IN/OUT														
# 32	17	526555	27	1A	7:15	EARLY	50	60/75	2			E							5-55	1	✓	5Sec	B.G	24	24	24	36	36	36	90	MEO	256	124	8	36	OUT	WEATHER MILD.											
EAST	18		30	2A			50	60/75	2										9-57																	ONE CABLE CHEN BY ANIMAL.												
	19	6	31	3A			510	10/15	5										13-61																													
	20		32	4A			50	60/75	2										17-65																													
	21		33	5A			50	60/75	2										21-69																													
	22		34	6A		Mon	50	60/75	2										25-73																													
	23		35	7A			50	60/75	2										29-77																													
	24		36	8A			50	60/75	2										33-81																													
	25	40	37	9A			50	60/75	2										37-85																													
	26	12	41	10A			50	60/75	2										41-89																													
	27		43	11A			50	60/75	2										45-93																													
	28		44	12A			50	60/75	2										37-85 53-81																													
	29		45	13A			50	60/75	2										37-85																													
	30		46	14A			50	60/75	2										41-89 37-85																													
	31		47	15A			50	60/75	2										41-89																													
	32		50	16A			50	60/75	2										45-93																													
	33		51	17A			50	60/75	2										45-93																													
	34		52	18A			50	60/75	2										45-93																													
	35		53	19A			50	60/75	2										45-93																													

FILE# 37 MISFIRE NO DATA
FILE# 41 MISFIRE NO DATA

MOVING RECORDER.

MOVING RECORDER.

Shooting out of Spread.

LINE completed.
complete Pick-up of Spread

Laying out on Line 34.

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	SPREAD PATTERN
PTL	10Hz	9	15'	1 string of nine Layed In Line	330' 4/8 Split. C fold coverage.

SHOT CONFIGURATION

1 HOLE.

#24 51P #25
X 330' P 330' X

Shooting fr. E → W

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB
UPPER SET LIMIT 62.5 %
LOWER SET LIMIT 18.75 %
FORMAT TYPE:
 9 TRACK 21 TRACK
GALVO LEVEL:
1-24 18 DB AUX 15 DB
OTHER:

MISCELLANEOUS INFORMATION:

DRD R# - 22 to 25
Test T.B R# - 26