


CLIENT: USN PARTY NO: 186 PROSPECT: N.P.R.-4 COUNTY: NORTH SLOPE STATE: ALASKA COUNTRY: USA LEFT STORAGE: 07:00 ARRIVED FIELD: 07:30 LEFT FIELD: 9:00 ARRIVED STORAGE: 10:00 DATE: 4-25-74 OBSERVER: DOROSH PAGE: 1 OF 1

IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN				FILTERS			REMARKS														
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL	PLAY BACK	TIME	SIZE	TOP BOT	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	P. SEIS OFFSET	S. SEIS OFFSET	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)				FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH					
33	1	528	010	LATE T.B.			1150	65/75	2			N				1/45	1	✓	5			OPER	24	30	42	42	42	42	90	MED	512	124	B	36		NO TAIL SPREAD #2-STARTED.	
	2	528	011				1150	65/75	2							1/45							42	42	42	42	30	24									
	3		012				1150	65/75	2							1/45																					
	4		015				1150	65/75	2							1/45																					
	5		014				1150	65/75	2							1/45																					
	6		015				1150	65/75	2							1/45																					
	7		016				1150	65/75	2							1/44																					
	8		017				1150	65/75	2							1/40																					
	9		020				1150	65/75	2							1/36																					
	10		021				1150	65/75	2							1/32																					
	11		022				1150	65/75	2							1/28																					
	12		023				1150	65/75	2							1/24																					
	13		024				1150	65/75	2							1/20																					
	14		025				1150	65/75	2							1/16																					
	15		026				1150	65/75	2							1/12																					
	16		027				1150	65/75	2							1/8																					
	17		032	T.B LATE			5x10	10'	5							44-22	2																				
	18		033				1150	65/75	2							40-88																					
	19		034				1150	65/75	2							1/36																					
	20		035				5x10	10'	5							1/32																					
	21		036				1150	65/75	2							1/28																					
	22		037				1150	65/75	2							1/24																					
	23		040				1150	65/75	2							1/20																					
	24		041				1150	65/75	2							1/16																					
	25		042				3x6	6	3							1/12																					
	26		043				1150	65/75	2							1/8																					
	27		044				1150	65/75	2							1/4																					
	28		045				1150	65/75	2							2/1																					

SEISMOMETER AND SPREAD INFORMATION						SHOT CONFIGURATION	
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN	
1000	9	15'	INLINE		330	48 GRP SPLIT. 600%	

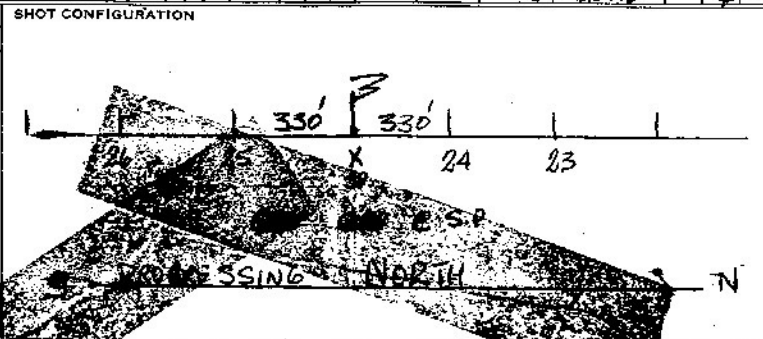

DFS III SYSTEM PARAMETERS:  
 GAIN CONSTANT 30 DB  
 UPPER SET LIMIT 62.5 %  
 LOWER SET LIMIT 18 %  
 FORMAT TYPE: T19C  
 9 TRACK  21 TRACK  
 GALVO LEVEL:  
 1-24 21 DB AUX 9 DB  
 OTHER:

MISCELLANEOUS INFORMATION:  
 F 001 WRITE #1 ONES.  
 F 002-005 DRD  
 F 06-07 T.T.B.  
 F 030-031 T.T.B

LINE	PROFILE	IDENTIFICATION		SHOT CAL.	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	SPREAD		S.P. SEIS. OFFSET	SEIS. DEPTH	CDP SWITCH	SETUP	TAPE				MODE	GAIN						FILTERS		REMARKS		
		REEL NUMBER	FILE NUMBER					TOP	BOT.						SAMPLE RATE MS	RECORD LENGTH					PARITY ERRORS	INITIAL GAIN (DB)						FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT	NOTCH IN			
		1	2					4	1-4/24						5-8	9-12					13-16	17-20	21-24	FREQ.		SLOPE	OUT									
7433	29	570 552	053				1150	65/75	2				N			100	1	✓	5	OPER	36	36	36	36	36	36	90	M60	384	124	B	36				
	30		054				1150	65/75	2																											
	31		056	055 MF			1150	65/75	2																											
SKIP	32		057	N.R.			1150	65/75	2																											
	33		062	060-61 M.F.s			1150	65/75	2																											
	34		063				1150	65/75	2																											
	35		064				1150	65/75	2																											
	36		065				1150	15'	5																											
	37		066				1150	65/75	2																											
	38		067				510	15'	5																											
	39		070				510	15'	5																											
	40		071				510	15'	5																											
	41		072				5150	65/75	2																											
	42																																			

SKIP

NR

b-11


NR

COULD NOT FINISH LINE.  
BLASTED GAVE OUT - SPACE OUT FOR REPAIR.

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
	10yr	9	15'	INLINE.	330'	40 GAP SPLIT.

SHOT CONFIGURATION

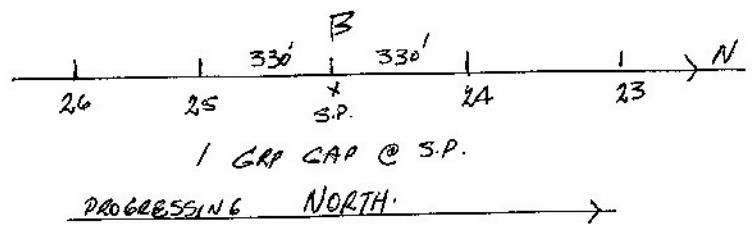

DFS III SYSTEM PARAMETERS:


GAIN CONSTANT 30 DB  
UPPER SET LIMIT 625 %  
LOWER SET LIMIT 18 %  
FORMAT TYPE: T1AC  
 9 TRACK  12 TRACK  
GALVO LEVEL:  
1-24 18 DB AUX 15 DB  
OTHER:

MISCELLANEOUS INFORMATION:

F-046-051-DRD.  
F-050 T.T.B.

Main data table with columns: IDENTIFICATION (LINE, PROFILE, REEL NUMBER, FILE NUMBER, SHOT CAL.), SHOT (PLAY BACK, TIME, SIZE, TOP, BOT., NO. CAPS, CODE, S.P. OFFSET, NO. DIR., CODE, S.E.S. OFFSET, S.E.D. DEPTH, CDP SWITCH, SETUP), SPREAD (NO. CAPS, CODE, S.P. OFFSET, NO. DIR., CODE, S.E.S. OFFSET, S.E.D. DEPTH, CDP SWITCH, SETUP), TAPE (SAMPLE RATE MS, RECORD LENGTH, PARITY ERRORS, MODE), GAIN (INITIAL GAIN (DB), FINAL GAIN (DB), RELEASE RATE, TRIP DELAY, HIGH CUT FREQ.), FILTERS (LOW CUT, NOTCH), REMARKS.

SEISMOMETER AND SPREAD INFORMATION table with columns: CODE, SEIS. TYPE, NO./GP., INT., GROUP PATTERN, GP. INT., SPREAD PATTERN.

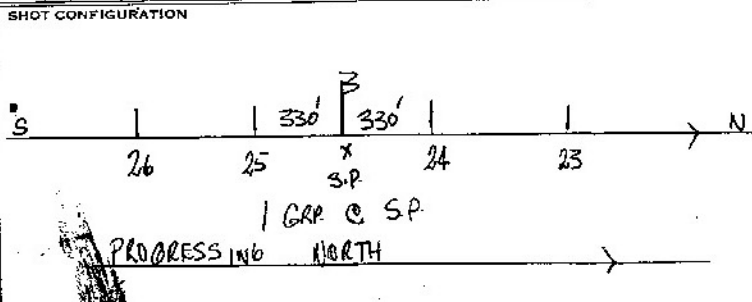

DFS III SYSTEM PARAMETERS table listing: GAIN CONSTANT, UPPER SET LIMIT, LOWER SET LIMIT, FORMAT TYPE, GALVO LEVEL, OTHER.

MISCELLANEOUS INFORMATION: F 073-100 TTB. (4-26-74), F-101-104 DRD., F-105-T.T.B., F.