

IDENTIFICATION		SHOT		SPREAD										TAPE		GAIN						FILTERS		REMARKS												
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL	PLAY BACK	TIME	SIZE	TOP BOT	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	D. SEIS. OFFSET	W. SEIS. OFFSET	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)						FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT FREQ.	SLOPE	NOTCH IN OUT		
																		1 2 4				1-47 24	5-8	9-12	13-16	17-20	21-24									
39	1	523196	463	A	RAW	①	15	67/75	2	①		S	0	10'	12	1/9	①	✓	6SEC	OP	54	54	54	48	48	36	120	FAST	AUTO 640	124	8	36	OUT	EXPERIMENTAL SHOTS ON S.P. 1		
	1		464	B	278	④	50	32/150	2													36	48	48	54	54										
	1		465	C		⑦	50	72/40	2																											
	1		466	D		⑤	50	107/170	2																											
	1		467	E		⑥	50	87/105	2																											
	1		470	F		⑨	50	43/60	2																											
	1		471	G		⑧ ②	50	57/75	2																											
	1		472	H		③	100	39/55	2																											
	2		473	A	RAW		50	57/75	2																											
	3		474				50	57/75	2																										UPHOLE CROSSFEED TO TR6-7	
	4		475				50	57/75	2																											
	5		476				50	57/75	2																											
	6		477				50	57/75	2																											
	7		500				50	57/75	2		165'S																								S.P. 7 ON LAKE	
	8		501				50	57/75	2													7SEC														
	9		503				50	57/75	2													6SEC														
	10		505				50	57/75	2																											
	11		506				50	57/75	2																											
	12		507				50	57/75	2																											
	13		510		AMP		50	57/75	2																											
				TAPE CHANGE																																
	14	523197	511		RAW		50	57/75	2																											
	15		512				50	57/75	2																											
	16		513				50	57/75	2																											
	17		514				50	57/75	2																											
	18		515				50	57/75	2																											

UPHOLE 20' DIA

UPHOLE CROSSFEED TO TR6-7


S.P. 7 ON LAKE
7 SEC REC

704

640

TR#46 DEAD

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.
①		9	12'	INLINE	330
48 GROUPS INLINE 24/24 SPLIT NO GAP					

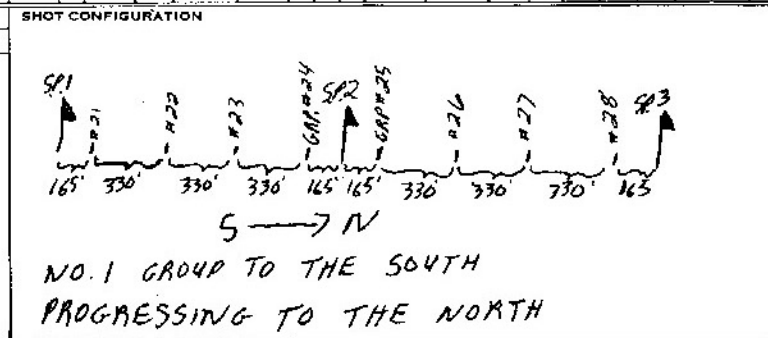

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT	30	DB
UPPER SET LIMIT	62.5	%
LOWER SET LIMIT	18	%
FORMAT TYPE:	<input type="checkbox"/> 9 TRACK <input checked="" type="checkbox"/> 21 TRACK	
GALVO LEVEL:	1-24 18 DB AUX 15 DB	
OTHER:	356 BPI 2M11	

MISCELLANEOUS INFORMATION:

REC# 452-461 - DRD TEST
REC# 462 - TEST TB.
REC# 502 - MISSFIRE
WAIT ON DRILLS

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																									
US NAVY		1184	NPR-4		ALASKA	U.S.A.	7:00	8:00	5:30	6:30	FEB 29/75	Victor Donald / Paul	108																									
IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN				FILTERS		REMARKS																
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL	PLAY BACK	TIME	SIZE	TOP BOT.	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S. SEIS. OFFSET	SPREAD LENGTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE		INITIAL GAIN (DB)						FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	FREQ	SLOPE	NOTCH IN	OUT		
39	55	523198	605	A	AAW		50	57/75	2	①		S	①	10'	11	1/5	①	✓	658		OP	54	54	54	48	48	36	120	EAST	AUTO 376	124	8	36	04T				
	56		606				50	57/75	2														36	48	48	54	54											
	57		607				50	8/26	2																													
	58		610				45	0/19	2																													
	59		611				50	57/75	2																													
	60		612				50	57/75	2																													
	61		SKIP		UNABLE		70	PRILL - LAKE																														
	62		613				50	57/75	2																													
	63		614				50	57/75	2																													
	64		616	A			50	57/75	2		495'S																											
	64		617	B	PPB		50	57/75	2																													
	65		620	A	BAW		50	57/75	2																													
	66		621				50	57/75	2																													
	67		622				50	57/75	2																													
	68		623				50	57/75	2																													
	69		624				50	57/75	2																													
	70		625				50	57/75	2																													
	71		626				50	57/75	2																													
	72		627				50	57/75	2																													

SP ON LAKE
SP. ON LAKE


PAPER JAM - NO BAW PAPER RECORD

512

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
①		9	312'	INLINE	330'	118 GROUPS INLINE 24/24 SPLIT NO GAP

SHOT CONFIGURATION

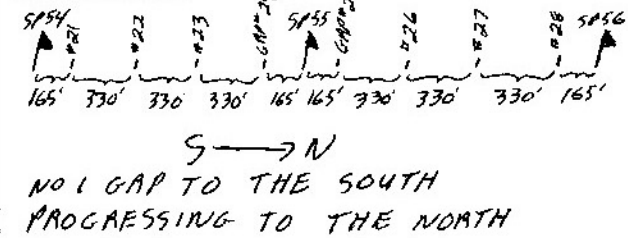

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB
 UPPER SET LIMIT 62.5 %
 LOWER SET LIMIT 18 %
 FORMAT TYPE:
 9 TRACK 21 TRACK
 GALVO LEVEL:
 1-24 18 DB AUX 15 DB
 OTHER: 356 BPI
 2 111

MISCELLANEOUS INFORMATION:

REC# 574 - 603 DRD TEST
 REC# 604 - TEST T.B.
 REC# 615 PULSE TEST

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																									
U.S. NAVY		184	N.P.R-4		ALASKA	U.S.A.	700	8 ⁰⁰			2-23-75	F. Carbenius	1081																									
IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN				FILTERS		REMARKS																
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL	PLAY BACK	TIME	SIZE	TOP	BOT	NO CAPS	CODE	S.P. OFFSET	NO. DIR.	CODE	S.P. SEIS. OFFSET	SEIS. DEPTH	COP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS		MODE	INITIAL GAIN (DB)					FINAL GAIN DB	RELEASE RATE	TRIP DELAY MIN	HIGH CUT FREQ.	LOW CUT FREQ.	SLOPE	NOTCH IN	NOTCH OUT		
39	73	523198	641	1	R/W		50	57/75	2				5	10'			1/5	1	✓	6			OPER	54	54	54	54	48	36	90	Fast	124	8	36	OUT			
	74	"	642	2			50	57/75	2				"	"			1/9		✓	"			"	36	48	54	54	54	54	"	"							
	75	"	643	3			50	57/75	2				"	"			1/13		✓	"			"															
	76	"	644	4			50	57/75	2				"	"			1/17		✓	"			"															
	77	"	645	5			50	57/75	2				"	"			1/21		✓	"			"															
	78	"	646	6			50	57/75	2				"	"			1/25		✓	"			"															
	79	"	647	7			50	57/75	2				"	"			1/29		✓	"			"															
	80	"	650	8			50	57/75	2			300'E	"	500'			1/33		✓	"			"															
	81	"	651	9			50	57/75	2				"	10'			1/37		✓	"			"															
*	82	"	653	10			50	57/75	2				"	"			1/5	2	✓	"			"															
	83	"	654	11			50	57/75	2				"	"			1/9		✓	"			"															
	84	"	655	12			50	57/75	2			330'N	"	50'			1/13		✓	"			"															
	85	"	656	13			50	57/75	2			330'N	"	50'			1/17		✓	"			"															
	86	"	657	14			50	57/75	2			330'N	"	50'			1/21		✓	"			"															
	87	"	660	15			50	57/75	2			330'N	"	50'			1/25		✓	"			"															
	88	"	661	16			50	57/75	2				"	10'			1/29		✓	"			"															
*	89	523199	662	17			50	57/75	2				"	10'			1/33		✓	"			"															
	90	"	663	18			50	57/75	2				"	"			1/37		✓	"			"															
	91	"	664	19			50	57/75	2				"	"			1/5	3	✓	"			"															
	92	"	665	20			50	57/75	2				"	"			1/9		✓	"			"															
	93	"	666	21			50	57/75	2				"	"			1/13		✓	"			"															
	94	"	667	22			50	57/75	2				"	"			1/17		✓	"			"															
	95	"	670	23			50	57/75	2				"	"			1/21		✓	"			"															
	96	"	671	24			50	57/75	2				"	"			1/25		✓	"			"															
	97	"	672	25			50	57/75	2				"	"			1/29		✓	"			"															
	98	"	673	26			50	57/75	2				"	"			1/33		✓	"			"															

Unit while chain crew re-chained spread between S.P. #83, 84 offset 300' East.

Moved up.

330' offset 230' N - U.H. 50' Parallel

330' offset 230' N - U.H. 50' " "

330' offset 230' N - U.H. 50' " "

330' offset 230' N - U.H. 50' " "


Normal split.

Moved up. #1 - Dead.

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
		9				

SHOT CONFIGURATION

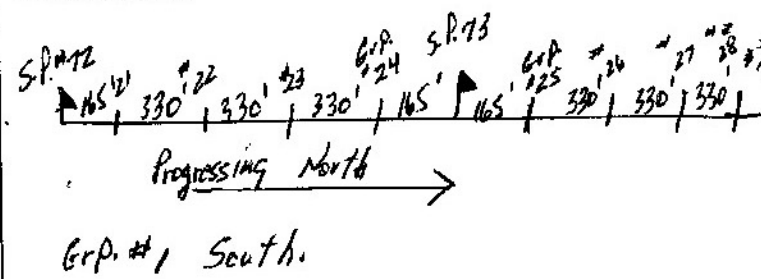

DFS III SYSTEM PARAMETERS:


GAIN CONSTANT 30 DB
 UPPER SET LIMIT 62.5 %
 LOWER SET LIMIT 18 %
 FORMAT TYPE:
 9 TRACK 24 TRACK
 GALVO LEVEL:
 1-24 18 DB AUX 15 DB
 OTHER:

MISCELLANEOUS INFORMATION:

File # 630 - 637 D.R.D.
 File # 640 - TEST T.B.
 File # 652 - Pulse test.*
 ** - changed tape # 523199

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																					
U.S. NAVY		109	N.P.R.-4		ALASKA	U.S.A.	700	8:30	8:30	9:00	Feb 24/75	F. Carlsenius	1 of 1																					
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	SPREAD		SETUP	TAPE		MODE	GAIN					RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	FILTERS		REMARKS			
								TOP	BOT.						SAMPLE RATE MS	RECORD LENGTH		PARITY ERRORS	INITIAL GAIN (DB)		FINAL GAIN DB	LOW CUT FREQ.	NOTCH											
																						1-4 24	5-8	9-12	13-16	17-20	21-24			FREQ	SLOPE	IN	OUT	

SEISMOMETER AND SPREAD INFORMATION						
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
		9				

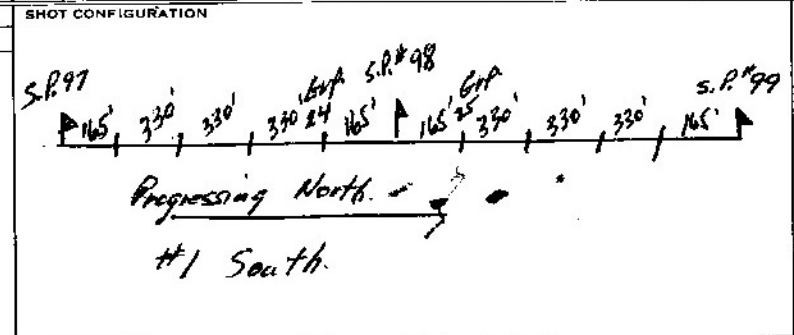

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB
 UPPER SET LIMIT 12.5 %
 LOWER SET LIMIT 18 %
 FORMAT TYPE:
 9 TRACK 21 TRACK
 GALVO LEVEL:
 1-24 18 DB AUX 15 DB
 OTHER:

MISCELLANEOUS INFORMATION:

File # 673 - 702 D.R.D.
 File # 703 Test T.B.
 * No Monitor - Camera jammed D.P.B.

CLIENT		PARTY NO.		PROSPECT		COUNTY		STATE		COUNTRY		LEFT STORAGE		ARRIVED FIELD		LEFT FIELD		ARRIVED STORAGE		DATE		OBSERVER		PAGE														
U.S. NAVY		184		N.P.R.-4				ALASKA		U.S.A.		7 ⁰⁰		8 ³⁰		730		800		2-25-75		F. Carlssonius		108														
IDENTIFICATION					SHOT					SPREAD					TAPE					GAIN					FILTERS				REMARKS									
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL	PLAY BACK	TIME	SIZE	TOP		NO CAPS	CODE	S.P. OFFSET	NO. DIR.	CODE	S. SEIS. OFFSET	SEIS. DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS				RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)					FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH	
								BOT	NO. CAPS										1	2	4	1-4/24				5-8	9-12	13-16	17-20	21-24					FREQ.	SLOPE	IN	OUT
34X	125	623200	747	1	R/W		50	57/75	2				S	10			1/5	1	✓		6		OVER.	54	54	54	48	48	36	90	RST	AUT	124	8	36	OUT	Late TB	
	126		750	2			50	57/75	2				"	"			1/9		✓		"		"	36	48	48	54	54	"	"	"	"	"	"	"	"		
	127		751	3			50	57/75	2				"	"			1/13		✓		"		"						"	"	"	"	"	"	"	"		
	128		752	4			50	57/75	2				"	"			1/17		✓		"		"						"	"	"	"	"	"	"	"		
	129		753	5			50	57/75	2				"	"			1/21		✓		"		"						"	"	"	"	"	"	"	"		
	130		754	6			50	57/75	2				"	"			1/25		✓		"		"						"	"	"	"	"	"	"	"		
	131		755	7			50	57/75	2				"	"			1/29		✓		"		"						"	"	"	"	"	"	"	"		
	132		756	8			50	57/75	2				"	"			1/33		✓		"		"						"	"	"	"	"	"	"	"		
	133		757	9			50	57/75	2				"	"			1/37		✓		"		"						"	"	"	"	"	"	"	"		
	134		760	10			50	57/75	2				"	"			1/5	2	✓		"		"						"	"	"	"	"	"	"	"	Moved-up.	
	135		761	11			50	57/75	2				"	"			1/9		✓		"		"						"	"	"	"	"	"	"	"		
	136		762	12			50	57/75	2				"	"			1/13		✓		"		"						"	"	"	"	"	"	"	"		
	137		763	13			50	57/75	2				"	"			1/17		✓		"		"						"	"	"	"	"	"	"	"		
	138		764	14			50	57/75	2				"	"			1/21		✓		"		"						"	"	"	"	"	"	"	"	Unit for camp to move off spread.	
	139		765	15			50	57/75	2				"	"			1/25		✓		"		"						"	"	"	"	"	"	"	"		
	140		766	16			50	57/75	2				"	"			1/29		✓		"		"						"	"	"	"	"	"	"	"		
	141		767	17			50	57/75	2				"	"			1/33		✓		"		"						"	"	"	"	"	"	"	"		
	142		770	18			50	57/75	2				"	"			1/37		✓		"		"						"	"	"	"	"	"	"	"		
*	143		771	19			50	57/75	2				"	"			1/5	3	✓		5		"						"	"	"	"	"	"	"	"	No MONITOR. Unit for cat to pull jag track. MS dead. Bad cable. * Dead.	
	144		772	20			50	57/75	2				"	"			1/9		✓		"		"						"	"	"	"	"	"	"	"		
	145		773	21			50	57/75	2				"	"			1/13		✓		"		"						"	"	"	"	"	"	"	"		
	146		774	22			50	57/75	2				"	"			1/17		✓		"		"						"	"	"	"	"	"	"	"		
	147		775	23			50	57/75	2				"	"			1/21		✓		"		"						"	"	"	"	"	"	"	"		
	148		776	24			50	57/75	2				"	"			1/25		✓		"		"						"	"	"	"	"	"	"	"		
	149		777	25			50	57/75	2				"	"			1/29		✓		"		"						"	"	"	"	"	"	"	"		
	150		1000	26			50	57/75	2				"	"			1/33		✓		"		"						"	"	"	"	"	"	"	"		
	151		1001	27			50	57/75	2				"	"			1/37		✓		"		"						"	"	"	"	"	"	"	"		

SEISMOMETER AND SPREAD INFORMATION						
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
0		9	12'	INLINE	330'	48 gyps. INLINE

SHOT CONFIGURATION	

DFS III SYSTEM PARAMETERS:	
GAIN CONSTANT	30 DB
UPPER SET LIMIT	22.5 %
LOWER SET LIMIT	18 %
FORMAT TYPE:	<input type="checkbox"/> 9 TRACK <input checked="" type="checkbox"/> 21 TRACK
GALVO LEVEL:	1-24 18 DB AUX 15 DB
OTHER:	

MISCELLANEOUS INFORMATION:
 * Changed to 5 second records. S.P. #142.

CLIENT: U.S. NAVY PARTY NO: 184 PROSPECT: N.P.R.-4 COUNTY: _____ STATE: ALASKA COUNTRY: U.S.A. LEFT STORAGE: 700 ARRIVED FIELD: 830 LEFT FIELD: _____ ARRIVED STORAGE: _____ DATE: 2-27-75 OBSERVER: F. Carbenia PAGE: 1071

LINE	PROFILE	REEL NUMBER	FILE NUMBER	IDENTIFICATION		SHOT				SPREAD				TAPE			GAIN						FILTERS			REMARKS										
				SHOT	CAL	PLAY BACK	TIME	SIZE	TOP	BOT	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. OFFSET	SEIS DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)						RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH	
																								1-4/24	5-8		9-12	13-16/17-20	21-24				FREQ.	SLOPE		IN
39X	179	52301	1047 1046	1	R/W		50	57/75	2		5	10'		1/5	1		✓	5			VER.	54	54	54	48	36	90	East	Auto	124	8	36	OUT			
	180		1050	2			50	57/75	2		"	"		1/9			✓	"			"	36	48	48	54	54	"	"	"	"	"	"	"	"		
	181		1051	3			50	57/75	2		"	"		1/13			✓	"			"	"	"	"	"	"	"	"	"	"	"	"	"	"		
	182		1052	4			50	57/75	2		"	"		1/17			✓	"			"	"	"	"	"	"	"	"	"	"	"	"	"	"		
	183		1053	5			50	57/75	2		"	"		1/21			✓	"			"	"	"	"	"	"	"	"	"	"	"	"	"	"		
* Lost	184		1054	6			50	57/75	2		"	"		1/25			✓	"			"	"	"	"	"	"	"	"	"	"	"	"	"	"	No Record *	
	185		1054	6			50	57/75	2		"	"		1/29			✓	"			"	"	"	"	"	"	"	"	"	"	"	"	"	"		
	186		1055	7			50	57/75	2		"	"		1/33			✓	"			"	"	"	"	"	"	"	"	"	"	"	"	"	"		
	187		1056	8			50	57/75	2		"	"		1/37			✓	"			"	"	"	"	"	"	"	"	"	"	"	"	"	"		
(wind)	188		1057	9			50	57/75	2		"	"		1/5	2		✓	"			"	"	"	"	"	"	"	"	"	"	"	"	"	Moved up.		
	189		1060	10			50	57/75	2		"	"		1/9			✓	"			"	"	"	"	"	"	"	"	"	"	"	"	"	"		
	190		1061	11			50	57/75	2		"	"		1/13			✓	"			"	"	"	"	"	"	"	"	"	"	"	"	"	"		
	191		1062	12			50	57/75	2		"	"		1/17			✓	"			"	"	"	"	"	"	"	"	"	"	"	"	"	"		
	192		1063	13			50	57/75	2		"	"		1/21			✓	"			"	"	"	"	"	"	"	"	"	"	"	"	"	"		
	193		1064	14			50	57/75	2		"	"		1/25			✓	"			"	"	"	"	"	"	"	"	"	"	"	"	"	"		
	194		1065	15			50	57/75	2		"	"		1/29			✓	"			"	"	"	"	"	"	"	"	"	"	"	"	"	"		
	195		1066	16			50	57/75	2		"	"		1/33			✓	"			"	"	"	"	"	"	"	"	"	"	"	"	"	"		
	196		1067	17			50	57/75	2		"	"		1/37			✓	"			"	"	"	"	"	"	"	"	"	"	"	"	"	"		
	197		1070	18			50	57/75	2		"	"		1/17	3		✓	"			"	"	"	"	"	"	"	"	"	"	"	"	"	"		
	198		1071	19			50	57/75	2		"	"		1/21			✓	"			"	"	"	"	"	"	"	"	"	"	"	"	"	"		
	199		1072	20			50	57/75	2		"	"		1/25			✓	"			"	"	"	"	"	"	"	"	"	"	"	"	"	"		
	200		1073	21			50	57/75	2		"	"		1/29			✓	"			"	"	"	"	"	"	"	"	"	"	"	"	"	"		
**	201		1074	22			50	57/75	2		"	"		1/33	24		✓	"			"	"	"	"	"	"	"	"	"	"	"	"	"	"		
	202		1075	23			50	57/75	2		"	"		1/37			✓	"			"	"	"	"	"	"	"	"	"	"	"	"	"	"	24 cap Tail spread. END OF LINE 39X.	

SEISMOMETER AND SPREAD INFORMATION						SHOT CONFIGURATION	
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN	

Progressing North.
Group #1 South end.

DFS III SYSTEM PARAMETERS:
GAIN CONSTANT: 30 DB
UPPER SET LIMIT: 62.5 %
LOWER SET LIMIT: 18 %
FORMAT TYPE:
 9 TRACK 21 TRACK
GALVO LEVEL:
1-24 18 DB AUX 15 DB
OTHER:

MISCELLANEOUS INFORMATION:
File #1046 Test T-B.
Bal start switch on
Format module - Shooter
did not disarm soon enough
charge fired when I keyed Mike.
** Operator error: Roll-a-long
Box in wrong position - same as
S.P. #200.