


CLIENT: USA PARTY NO: 160 PROSPECT: NVA-4 COUNTY: STATE: ALASKA COUNTRY: LEFT STORAGE: 7:00 ARRIVED FIELD: 8:00 LEFT FIELD: 5:30 ARRIVED STORAGE: 6:30 DATE: 20 MAY 75 OBSERVER: SCOTT PAGE: 1-0F.

LINE	PROFILE	IDENTIFICATION		SHOT CAL	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	SP. OFFSET	SPREAD				SETUP	TAPE				GAIN						FILTERS		REMARKS					
		FILE NUMBER	REEL NUMBER					TOP	BOT				NO. 1 DIR.	NO. 2 DIR.	NO. 3 DIR.	NO. 4 DIR.		RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)						FINAL GAIN DB	RELEASE RATE	TRIP DELAY		HIGH CUT FREQ.	LOW CUT	NOTCH		
44	1	14	1				110	95/105	2	A	165	N	A	6	111	7	1	6	AGC	66	66	54	42	42	30	900	F20	30V	728	36		#13 TEST T.B. 15 min wind			
	2	15	2				110	95/105							115																				
	3	16	3				110	95/105							114																				
	4	17	4				110	95/105							113																				
	5	20	5				110	75/105							117																				
	6	21	6				110	89/90							121																				
	7	22	7				110	95/105							125																				
	8	23	8				110	95/105							129																				
	9	24	9				110	95/105							133																				
	10	25	10				110	95/105							137																				
	11	26	11				110	95/105							141																				
	12	27	12				110	89/90							145																				
	13	30	13				110	95/105							149																				
	14	31	14				110	95/105							151	20																			
	15	32	15				110	95/105							115																				
	16	33	16				110	95/105							119																				
	17	34	17				110	95/105							113																				
	18	36	18				110	85/95							117																				
OFFSET	19	37	19				110	75/85							121																				
	20	40	20				110	95/105							125																				
	21	41	21				110	95/105							129																				
	22	42	22				110	95/105							133																				
	23	43	23				110	95/105							137																				

#35 No Record  
Offset 200' North

did not shoot had to build crossing with a cat.

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.
A	12N	12	272	W.L.V.G	330

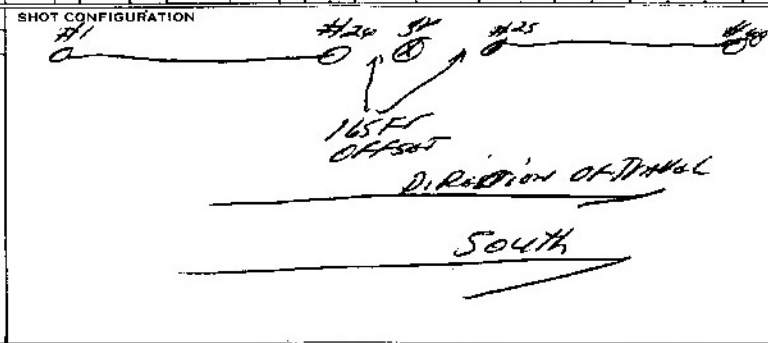

DFS III SYSTEM PARAMETERS:  
 GAIN CONSTANT 30 DB  
 UPPER SET LIMIT 75 %  
 LOWER SET LIMIT 25 %  
 FORMAT TYPE:  
 9 TRACK  21 TRACK  
 GALVO LEVEL:  
 1-24 15 DB AUX 15 DB  
 OTHER:


MISCELLANEOUS INFORMATION:  
 "STARTED LINE #44 WITH 40  
 heavy gears pushing #40 TO THE SOUTH."  
 ALL DAY A PACK OF WOLVES FOLLOWED TRUCKS  
 pulling up Jugs strings & cleaning oil  
 cables, ALSO CHASED Juggies into thick  
 TRUCKS.

CLIENT		PARTY NO.		PROSPECT		COUNTY		STATE		COUNTRY		LEFT STORAGE		ARRIVED FIELD		LEFT FIELD		ARRIVED STORAGE		DATE		OBSERVER		PAGE											
		186												9130		10:30		2 May 75		Scott		2-of-2													
IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN						FILTERS		REMARKS											
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL	PLAY BACK	TIME	SIZE	TOP BOT	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. SEIS. OFFSET	SEIS. DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)						FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH IN OUT	
																						1-24	5-8		9-12	13-18	17-20					21-24	FREQ.		SLOPE
44	50	D56	110	28			110	85/95	2									111	56																
	51		111	39			110	95/105										115																	
	52	<del>80</del>	112	30			110	85/95										119																	
	53	M	113	31			110	85/95										113																	
	54	O	114	32			110	85/95										117																	
	55	9	115	33			110	85/95										121																	
	56	2	116	34			110	85/95										125																	
	57	W	117	35			110	85/95										129																	
	58		120	36			110	85/95										133																	
	59		121	37			110	85/95										137																	No F.T.B.
OFFSET	60		122	38			110	85/95										141																	OFFSET 300 FT. WEST
	61		123	39			110	85/95										145																	No F.T.B.
	62		124	40			110	85/95										149																	No F.T.B.

SEISMOMETER AND SPREAD INFORMATION							SHOT CONFIGURATION		DFS III SYSTEM PARAMETERS:		MISCELLANEOUS INFORMATION:	
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN			GAIN CONSTANT	DB	UPPER SET LIMIT	%
									LOWER SET LIMIT	%		
									FORMAT TYPE:			
									<input type="checkbox"/> 9 TRACK	<input type="checkbox"/> 21 TRACK		
									GALVO LEVEL:			
									1-24	DB	AUX	DB
									OTHER:			

CLIENT		PARTY NO	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																										
		USM	186		ALASKA		7100	8:00			21 MAY 75	SCOTT	1-0F-2																										
LINE	PROFILE	IDENTIFICATION		SHOT CAL	PLAY BACK	TIME	SIZE	SHOT		SPREAD				TAPE		GAIN							FILTERS			REMARKS													
		REEL NUMBER	FILE NUMBER					TOP BOT	NO CAPS	CODE	SP OFFSET	NO. 1 DIR.	CODE	SEIS OFFSET	SEIS DEPTH	COP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)							FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH				
		1-4/24	5-8	9-12	13-16	17-20	21-24																																
44	23	D-54	56	1			110	85/105	2	A	165	No	A	6		1/1	1	6	M6C	66	60	59	40	42	36	90	Fast	384	120	8	36	-							
	24		57	2			110	85/95								1/5																							
	25	B	60	3			110	85/90								1/9																							
	26	3	61	4			110	85/105								1/13																							
	27	0	62	5			110	85/105								1/17																					No F.T.W		
	28	6	63	6			110	85/95								1/21																					PRC handed out next spread		
	29	2	64	7			110	85/105								1/25																					BUSCHMAN recording down line		
	30	5	65	8			110	85/105								1/29																							
	31		66	9			110	85/105								1/33																							
	32		67	10			110	85/95								1/37																							
	33		70	11			110	85/95								1/41																							
	34		71	12			110	85/95								1/45																							
	35		72	13			110	85/95								1/49																							
	36		73	14			110	85/95								1/1	42																						
	37		74	15			110	85/105								1/5																							
	38		75	16			110	85/105								1/9																							
	39		76	17			110	85/95								1/13																							
	40		77	18			110	85/95								1/17																							
	41		100	19			110	85/105								1/21																						#46 SKIPPED	
	42		101	20			110	85/105								1/25																							
	43		102	21			110	85/95								1/29																							
	44		103	22			110	85/105								1/33																							
SKIP	45		104	23			110	85/105								1/37																							SKIPPED due to large
	46		104	24			110	85/105								1/41																							
	47		105	25			110	85/105								1/45																							
OFF-SET	48		106	26			110	85/105								1/49																							OFF-SET 150 FT CORR
	49		107	27			110	85/95								1/23	49																						

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GRP.	INT.	GROUP PATTERN	GP. INT.
A	12N	12	27E	IN LINE	330

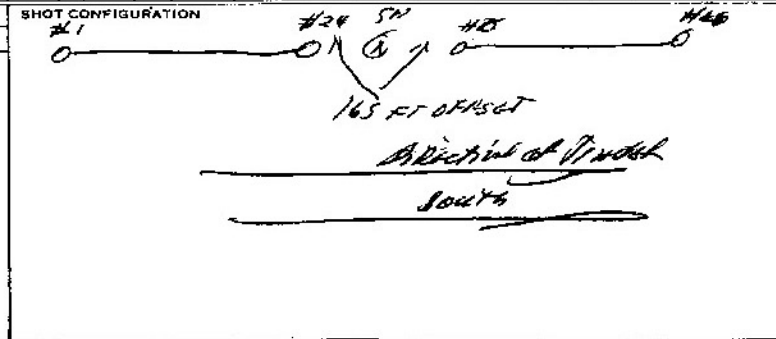

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB

UPPER SET LIMIT 75 %

LOWER SET LIMIT 25 %

FORMAT TYPE:

9 TRACK  21 TRACK

GALVO LEVEL:

1-24 15 DB AUX 15 DB


OTHER:

MISCELLANEOUS INFORMATION:

CLIENT		PARTY NO.		PROSPECT		COUNTY		STATE		COUNTRY		LEFT STORAGE		ARRIVED FIELD		LEFT FIELD		ARRIVED STORAGE		DATE		OBSERVER																
USN		106		NVC-4				NANSEN				7:00		8:00		6:00		7:00		22-MAY-75		SCOTT																
LINE	PROFILE	IDENTIFICATION			SHOT	PLAY BACK	TIME	SHOT		SPREAD						TAPE		GAIN						FILTERS		REMARKS												
		REEL NUMBER	FILE NUMBER	CAL				NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. SEIS. OFFSET	SEIS. DEPTH	CDP SWITCH	SETUP	SAMPLE RATE (MS)	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)						FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ	LOW CUT FREQ	SLOPE	NOTCH IN	NOTCH OUT				
44	63	DSC	125	1			110	95/105	2	H	165	S	H	6	1/5	68	1	6	HVC	66	60	54	40	42	36	90	F	304	124	8	30							
	64		126	2			110	95/105							1/9																							
	65		127	3			110	95/105							1/13																			Drills out line				
	66		130	4			110	95/105							1/17																							
	67		131	5			110	95/105							1/21																							
	68		132	6			110	95/105							1/1	74																						
	69		133	7			110	95/105							1/5																							
	70		134	8			110	95/105							1/9																							
	71		135	9			110	95/105							1/13																							
	72		136	10			110	95/105							1/17																							
	73		137	11			110	95/105							1/21																							
	74		140	12			110	95/105							1/25																							
	75		141	13			110	95/105							1/29																							
	76		142	14			110	95/105							1/17	78																						
	77		143	15			110	95/105							1/21																							
	78		144	16			110	95/105							1/25																							
	79		145	17			110	95/105							1/21	80																						
	80		146	18			110	95/105							1/25																							
	81		147	19			110	95/105							1/21	82																						
	82		150	20			110	95/105							1/25																							
	83		151	21			110	95/105							1/29																							
	84		152	22			110	95/105							1/33																							
SKIP	85			23											1/37																							
OFFSET	86		153	24			110	95/105							1/41																							
	87		154	25			110	95/105							1/45																							
	88		155	26			110	95/105							1/49																							

ENDED LINE WITH SK-88 EUGENET #155

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.
H	11N	12	07E	1N Line	330
				000000 000000	
				07E FT SPACING	

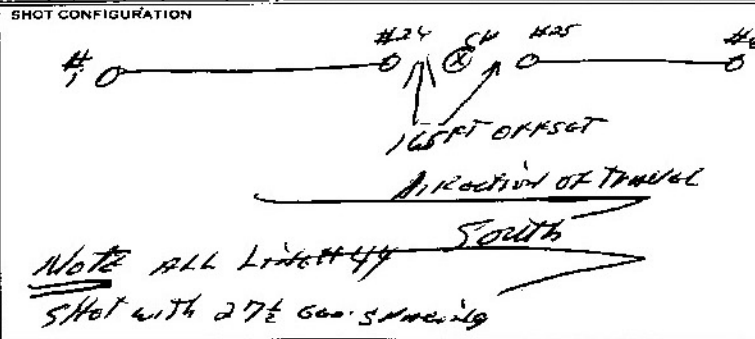

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT	30	DB
UPPER SET LIMIT	75	%
LOWER SET LIMIT	25	%
FORMAT TYPE:	<input type="checkbox"/> 9 TRACK <input type="checkbox"/> 21 TRACK	
GALVO LEVEL:	1-24	18 DB
AUX		18 DB
OTHER:		

MISCELLANEOUS INFORMATION:

ENDED LINE WITH 48 LINE STAYS PUSHING #48 TO THE SOUTH