

CLIENT: U.S. NAVY PARTY NO: 1184 PROSPECT: NPA-4 COUNTY: STATE: ALASKA COUNTRY: LEFT STORAGE: 700 AM ARRIVED FIELD: LEFT FIELD: ARRIVED STORAGE: 8:00 PM DATE: MAR 21/75 OBSERVED: *W. Donald* PAGE: 1 of 1

LINE	PROFILE	IDENTIFICATION		SHOT CAL	PLAY BACK	TIME	SIZE	TOP BOT	SHOT				SPREAD				TAPE				GAIN					FILTERS		REMARKS
		REEL NUMBER	FILE NUMBER						NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.EIS. OFFSET	US. SEIS. DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)					RELEASE RATE	
45		FINISH PICKING UP ON LINE 46 AND MOVED TO LINE 45 AND LAID OUT TAIL SPREAD PLUS 6 SHOT POINTS. SOME UNITS SERVICED ETC WHILE OTHERS WORKED LOTS OF SNOW - HILLS & ROUGH TERRAIN.																										

SEISMOMETER AND SPREAD INFORMATION						SHOT CONFIGURATION		DFS III SYSTEM PARAMETERS:		MISCELLANEOUS INFORMATION:	
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN			GAIN CONSTANT	DB	
									UPPER SET LIMIT	%	
									LOWER SET LIMIT	%	
									FORMAT TYPE:		
									<input type="checkbox"/> 9 TRACK	<input type="checkbox"/> 21 TRACK	
									GALVO LEVEL:		
									1-24	DB	AUX
									OTHER:		

CLIENT		PARTY NO.		PROSPECT		COUNTY		STATE		COUNTRY		LEFT STORAGE		ARRIVED FIELD		LEFT FIELD		ARRIVED STORAGE		DATE		OBSERVER		PAGE												
U.S. NAVY		1184		NPR-4		NORTH SLOPE		ALASKA		USA		700		800		800		000		MAR 23/75		V. J. ...		2 of 2												
IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN						FILTERS		REMARKS												
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL.	PLAY BACK	TIME	SIZE	TOP BOT.	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	R. SEIS. OFFSET	L. SEIS. OFFSET	COP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)						FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT FREQ.	SLOPE	NOTCH IN	NOTCH OUT	
45	53	522217	715	A	RAW		100	66/90	2	0		S	0	10	14	1/13	5	✓	6250	OP		5454	54	4844	36	120	FAT	4470	690	724	8	36	OUT			
	54		716				100	66/90	2						14	1/17							36	44	48	54	54									
	55		717				100	66/90	2						14	1/21																				
	56		720				100	66/90	2						-	1/25																				
	57		721				100	66/90	2						14	1/29																				
	58		722				100	66/90	2						14	1/33																				
	59		723				100	66/90	2						16	1/37																				
	60		724				100	66/90	2						18	1/41																				
	61		725				100	66/90	2						18	1/45																				
	62		726				100	66/90	2		165'S				14	1/9	10																			
	63		727				100	66/90	2						14	1/13																				
	64		730				100	66/90	2						14	1/17																				
	65		731				100	91/105	2						17	1/21																				
	66		732				100	91/105	2						18	1/25																				

UPHOLE DEAD

TR#38 DEAD

SEISMOMETER AND SPREAD INFORMATION						
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

SHOT CONFIGURATION

SAME AS PAGE 1 OF 2

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT \_\_\_\_\_ DB

UPPER SET LIMIT \_\_\_\_\_ %

LOWER SET LIMIT \_\_\_\_\_ %

FORMAT TYPE:

9 TRACK  21 TRACK

GALVO LEVEL:

1-24 \_\_\_\_\_ DB AUX \_\_\_\_\_ DB


OTHER:

MISCELLANEOUS INFORMATION:

CLIENT		PARTY NO	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																					
U.S. NAVY		1184	NPR-4	NORTH SLOPE	ALASKA	U.S.A.	700	800	800	900	MAR 27/75	Vic Donald	1082																					
LINE	PROFILE	IDENTIFICATION		SHOT	TIME	SIZE	SHOT		NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. OFFSET	SPREAD	CDP SWITCH	SETUP	TAPE				MODE	GAIN					RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	FILTERS		NOTCH	REMARKS
		REEL NUMBER	FILE NUMBER				TOP	BOT.										SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	INITIAL GAIN (DB)		FINAL GAIN DB	1-4/24	5-8	9-12	13-16				17-20	21-24		

TAPE CHANGE

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.
0		9	12'	INLINE	330

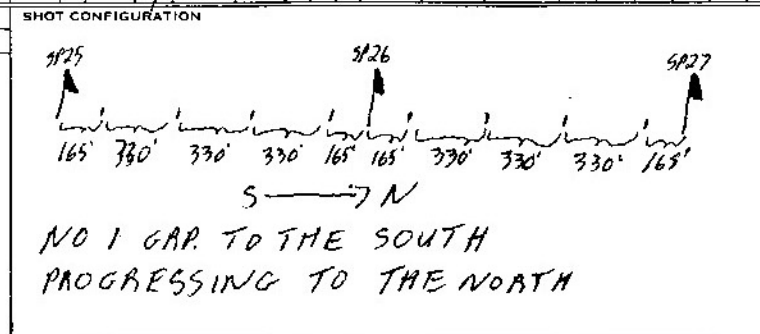

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB  
 UPPER SET LIMIT 62%  
 LOWER SET LIMIT 16%  
 FORMAT TYPE:  
 9 TRACK  21 TRACK  
 GALVO LEVEL:  
 1-24 21 DB AUX 15 DB  
 OTHER:

MISCELLANEOUS INFORMATION:

REC# 650 → 657 DRD TEST  
 REC# 660 TEST TB  
 REC# 676 PULSE TEST - TAPE# 523217



CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																		
U.S. NAVY		1184	NPR-4	NORTH SLOPE	ALASKA	U.S.A.	7:00	7:30	9:00	11:00	MAR 24/75	W. Donald	1 of 1																		
LINE	PROFILE	IDENTIFICATION		SHOT CAL.	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	S.P. OFFSET	NO. DIR.	SPREAD		CDP SWITCH	SETUP	TAPE		MODE	GAIN					RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	FILTERS		REMARKS
		REEL NUMBER	FILE NUMBER					TOP	BOT.					NO. VLS	NO. DIR.			RECORD LENGTH	PARITY ERRORS		INITIAL GAIN (DB)	FINAL GAIN DB	1-4/24	5-8	9-12				13-16	17-20	


TAPE CHANGE

WEAK SHOT - ONLY 5 LBS WENT OFF

TR#45 DEAD  
TR#47+41 DEAD

BAD-DAY: WAIT ON SURVEY & DRILLS  
ROUGH LINE - HILLS - DEEP SINKS & RIVERS  
- DRAG OUTS WITH CABLE

SEISMOMETER AND SPREAD INFORMATION				
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN
①		9	12'	INLINE
			GP. INT.	SPREAD PATTERN
				48 GROUPS INLINE 24/24 SPLIT NO GAP

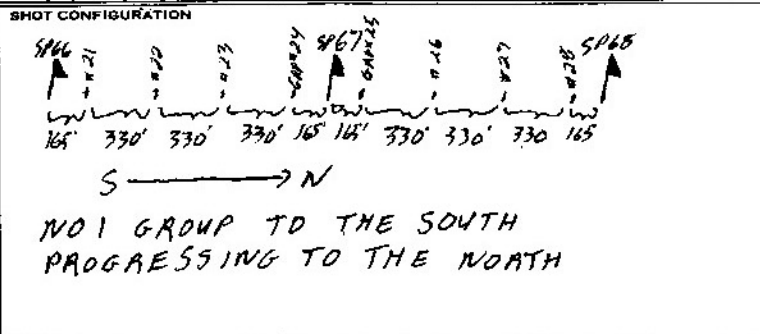

DFS III SYSTEM PARAMETERS:


GAIN CONSTANT 30 DB  
UPPER SET LIMIT 62.5 %  
LOWER SET LIMIT 18 %  
FORMAT TYPE:  
 9 TRACK  21 TRACK  
GALVO LEVEL:  
1-24 21 DB AUX 15 DB  
OTHER:

MISCELLANEOUS INFORMATION:

REC# 733-742 DAD TEST  
REC# 743 TEST TO.  
REC# 754 - PULSE TEST  
CAMERA SOMETIMES ONLY HAS 8 TIMING LINES INSTEAD OF 9 BETWEEN EVERY HEAVY LINES SET

CLIENT		PARTY NO.		PROSPECT		COUNTY		STATE		COUNTRY		LEFT STORAGE		ARRIVED FIELD		LEFT FIELD		ARRIVED STORAGE		DATE		OBSERVER		PAGE												
U.S. NAVY		1184		2PA-4		NORTH SLOPE		ALASKA		USA		7.00		7.30		800		900		MAR 25/78		Vic Ronda		1082												
LINE	PROFILE	IDENTIFICATION		SHOT CAL.	PLAY BACK	TIME	SIZE	SHOT		SPREAD				TAPE		GAIN						FILTERS		REMARKS												
		REEL NUMBER	FILE NUMBER					TOP	NO CAPS	NO. 1 DIR.	CODE	SP. OFFSET	NO. 1 DIR.	CODE	NO. 1 DIR.	CODE	NO. 1 DIR.	CODE	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)						RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT	NOTCH				
45	84	523218	777	A	RAW		100	66/90	2	0		S	0	10	10	1/2	0	4	6sec	DP	54	54	54	48	48	36	120	FAST	M410 6YD	128	8	76	04T			
	85		1000				100	66/90	2																											
	86		1001				100	66/90	2																											
	87		1002				100	66/90	2																											
	88		1003				100	66/90	2																											
	89		1004				100	66/90	2																											
	90		1005				100	66/90	2																											
	91		1006				100	66/90	2																											
	92		1007				100	66/90	2																											
	93		1010				100	66/90	2																											
	94		1011				100	66/90	2																											
	95		1012				100	66/90	2																											
	96		1013				100	66/90	2																											
	97		1015				100	66/90	2																											
	98		1016				100	66/90	2																											
	99		1017				100	66/90	2																											
	100		1020				100	66/90	2																											
	101		1021				100	66/90	2																											
	102		1022				100	66/90	2																											
	103		1023				100	66/90	2																											
	104		1024				100	66/90	2																											
	105		1025				100	66/90	2																											
	106		1026				100	66/90	2																											
	107		1027				100	66/90	2																											
	108		1030				100	66/90	2																											
	109		1031				100	66/90	2																											
	110		1032				100	66/90	2																											
	111		1033				100	66/90	2																											

SEISMOMETER AND SPREAD INFORMATION				SHOT CONFIGURATION		
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
0		9	12'	INLINE	330'	48 GROUPS INLINE 24/24 SPLIT NO GAP

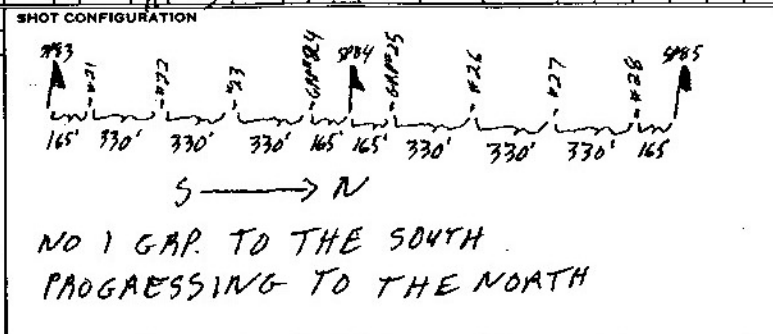


DFS III SYSTEM PARAMETERS:  
 GAIN CONSTANT 30 DB  
 UPPER SET LIMIT 62.5 %  
 LOWER SET LIMIT 18 %  
 FORMAT TYPE:  
 9 TRACK  21 TRACK  
 GALVO LEVEL:  
 1-24 21 DB AUX 15 DB  
 OTHER:

MISCELLANEOUS INFORMATION:  
 REC# 766-775 DRD TEST  
 REC# 776 TEST TB.  
 REC# 1014 - PULSE TEST



CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																					
U.S. NAVY		1184	NPA-4	NORTH SLOPE	ALASKA	U.S.A.	700	7:30	630	730	MAR 26/79	Vic Donald	1 of 1																					
LINE	PROFILE	IDENTIFICATION		SHOT CAL	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	SP. OFFSET	NO. 1 DIR.	CODE	SPREAD			TAPE			GAIN					FILTERS		REMARKS						
		REEL NUMBER	FILE NUMBER					TOP BOT.	SEIS. OFFSET						SEIS. DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)					FINAL GAIN DB		RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT FREQ.	NOTCH IN/OUT	
45	121	523218	1056	A	RAW		100	66/90	2			5	10	10'	13'	11	Y5	636C	DP	54	54	54	48	48	36	220	FAST	440	12K	5	36	OUT		
	122		1057				100	66/90	2								11	Y5																
	123		1060				100	66/90	2			1655					13	Y9																
	124		1061				100	66/90	2								13	Y13																
	125		1062				100	66/90	2								13	Y17																
	126		1063				100	66/90	2								11	Y21															TR#12-DEAD	
	127		1064				100	66/90	2								11	Y25															TR#228 DEAD	
	128		1065				100	66/90	2								12	Y29															TR#418 DEAD	
	129		1066				100	66/90	2								11	Y33															TR#4 DEAD	
	130		1067				100	66/90	2								11	Y37																
	131		1070				100	66/90	2								13	Y41																TR#47 DEAD
	132		1071				100	66/90	2								11	Y45																TR#43 DEAD
	133		1072				100	66/90	2								11	Y1	(2)															
	134		1073				100	66/90	2								10	Y5																
	135		1074				100	66/90	2								10	Y9																

SEISMOMETER AND SPREAD INFORMATION				
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN
①		9	12'	INLINE
				GP. INT. 330'
				SPREAD PATTERN 48 GROUPS INLINE
				24/24 SPLIT NO GAP

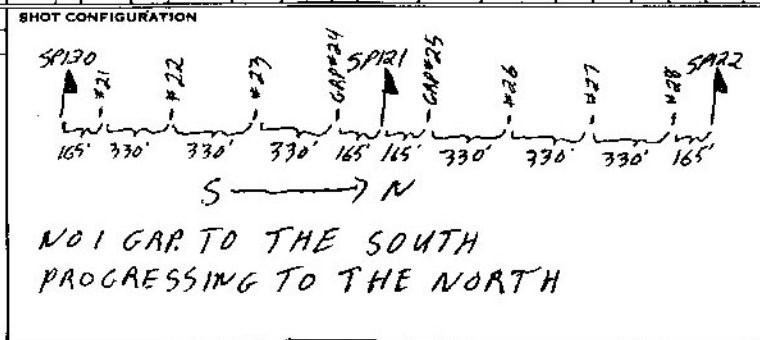

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT	30	DB
UPPER SET LIMIT	62.5	%
LOWER SET LIMIT	15	%
FORMAT TYPE:	<input type="checkbox"/> 9 TRACK <input checked="" type="checkbox"/> 21 TRACK	
GALVO LEVEL:	1-24 21 DB    AUX 15 DB	
OTHER:		

MISCELLANEOUS INFORMATION:


REC# 1045-1054-PRD TEST-TAPE #523218  
 TEST T.B. - REC# 1055-TAPE# 523219

TIMING LINE SOMETIMES MISSING DUE TO CAMERA PROBLEM  
 WAIT ON SURVEY + DRILLS  
 NO ROUGH GOING DUE TO RIVERS-GREEKS-HILLS-DEEPSNOW



CLIENT		PARTY NO.		PROSPECT		COUNTY		STATE		COUNTRY		LEFT STORAGE		ARRIVED FIELD		LEFT FIELD		ARRIVED STORAGE		DATE		OBSERVER		PAGE											
U.S. NAVY		1184		NPA-Y		NORTH SLOPE		ALASKA		U.S.A.		700		800		800		8.30		MAR 28/75		Vic Donald		1082											
LINE	PROFILE	IDENTIFICATION		SHOT CAL.	PLAY BACK	TIME	SHOT				SPREAD				TAPE			GAIN					FILTERS			REMARKS									
		REEL NUMBER	FILE NUMBER				SIZE	TOP BOT.	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. OFFSET	NO. 2 DIR.	CODE	S.P. OFFSET	NO. 3 DIR.	CODE	S.P. OFFSET	MODE	INITIAL GAIN (DB)					FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH		
45	136	523219	1106	A	RAW		100	66/90	2	D		5	D	10	10	1/3	D	6SEC	OP	54	54	54	48	48	36	120	FAST	4470	124	8	36	OUT			
	137		1107				100	66/90	2																										
	138		1110				100	66/90	2																										
	139		1111				100	66/90	2																										
	140		1112				100	66/90	2																										
	141		1113				100	66/90	2																										
	142		1114				100	66/90	2																										
	143		1115				100	66/90	2																										
	144		1116				100	66/90	2																										
	145		1117				100	66/90	2																										
	146		1121				100	66/90	2																										
	147		1122				100	66/90	2																										
	148		1123				100	66/90	2																										
	149		1124				100	66/90	2																										
	150		1125				100	66/90	2																										
	151		1126				100	66/90	2																										
	152		1127				100	66/90	2																										
	153		1130				100	66/90	2																										
	154		1131				100	66/90	2																										
	155		1132				50	57/75	2																									TR#47 DEAD	
	156		1133				70	70/90	2																									TR#43 DEAD	
	157		1134				100	66/90	2																										TR#39 DEAD
	158		1135				50	57/75	2																										TR#8 SHORTED
	159		1136				50	57/75	2																										TR#4 SHORTED
	160		1137				50	57/75	2																										576
	161		1140				50	57/75	2																										
	162		1141				50	57/75	2																										
	163		1142				50	57/75	2																										

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.
0		9	12'	INLINE	330'
48 GROUPS INLINE 24/24 SPLIT NO GAP					

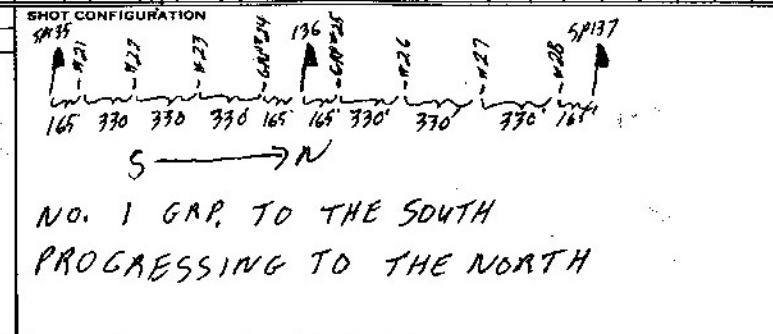

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT	30	DB
UPPER SET LIMIT	62.5	%
LOWER SET LIMIT	18	%
FORMAT TYPE:	<input type="checkbox"/> 9 TRACK <input checked="" type="checkbox"/> 21 TRACK	
GALVO LEVEL:	1-24 21 DB    AUX 15 DB	
OTHER:		


MISCELLANEOUS INFORMATION:

AEC# 1075-1104 DAD TEST  
 AEC# 1105 TEST TRS.  
 AEC# 1120- PULSE TEST



CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																					
U.S. NAVY		7184	NPR-4	NORTH SLOPE	ALASKA	U.S.A.	700	8 00	130	230	MAR 29/69	Vic. Jona	1081																					
LINE	PROFILE	IDENTIFICATION		SHOT CAL.	PLAY BACK	TIME	SIZE	SHOT		NO. CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	SPREAD		CDP SWITCH	SETUP	TAPE				MODE	GAIN							FILTERS			REMARKS
		REEL NUMBER	FILE NUMBER					TOP	BOT.						SEIS. OFFSET	LINE LENGTH			SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	INITIAL GAIN (DB)		FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT	NOTCH					
1-4/24	5-8	9-12	13-16	17-20	21-24	FREQ.	SLOPE	IN	OUT																									

SEISMOMETER AND SPREAD INFORMATION						
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
0		9	12'	INLINE	330'	48 GROUPS INLINE 24/24 SPLIT

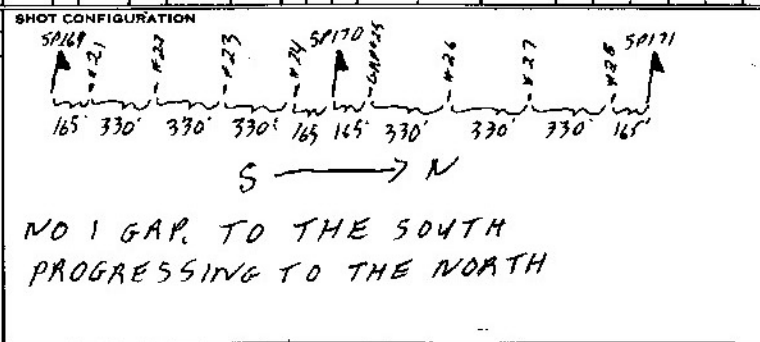

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT	30 DB
UPPER SET LIMIT	62.5 %
LOWER SET LIMIT	18 %
FORMAT TYPE:	<input type="checkbox"/> 9 TRACK <input checked="" type="checkbox"/> 21 TRACK
GALVO LEVEL:	1-24 28 DB AUX 15 DB
OTHER:	


MISCELLANEOUS INFORMATION:

REC# 1151-1160 - PRO TEST  
 REC# 1161 TEST IB.  
 WEATHER RAY DUE TO HIGH WINDS & BLOWING SNOW

TR# 45 DEAD  
 TR# 41 "

CLIENT		PARTY NO.		PROSPECT		COUNTY		STATE		COUNTRY		LEFT STORAGE		ARRIVED FIELD		LEFT FIELD		ARRIVED STORAGE		DATE		OBSERVER		PAGE														
U.S. NAVY		1184		NPR-4		NORTH SLOPE		ALASKA		USA		700		730		700		8:00		MAR 30/75		Vic Donald		1 of 1														
LINE	PROFILE	IDENTIFICATION		SHOT CAL.	PLAY BACK	TIME	SIZE	SHOT		NO. CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	SPREAD		COP SWITCH	SETUP	TAPE				RECORD LENGTH	PARITY ERRORS	MODE	GAIN						RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	FILTERS		NOTCH IN/OUT	REMARKS
		REEL NUMBER	FILE NUMBER					TOP	BOT.						1	2			3	4	1-4/24	5-8				9-12	13-16	17-20	21-24	FINAL GAIN DB	FREQ.				SLOPE			
45	181	523220	1206	A	RAW		50	57/75	2	0		S	0	10'	12'	1/1	0	65EC	OP.	54	54	54	48	48	36	120	FAST	4470	512	124	8	36	OUT					
	182		1207				100	66/90	2						13	1/5																						
	183		1210				100	66/90	2						14	1/9																						
	184		1211				100	66/90	2						13	1/3																						
	185		1212				50	57/75	2						12	1/7																						
	186		1213				50	57/75	2						12	1/21																						
	187		1214				110	80/90	2						14	1/25																						
	188		1215				100	66/90	2						13	1/29																						
	189		1216				100	66/90	2						14	1/33																						
	190		1217				100	66/90	2						13	1/37																						
	191		1220				100	66/90	2						13	1/41																						
	192		1221				100	66/90	2						13	1/45																						
	193		1222				100	66/90	2						13	1/49																						
	194		1224				100	66/90	2						13	1/5																						
	195		1225				100	66/90	2						12	1/9																						
	196		1226				100	66/90	2						12	1/13																						
	197		1227				100	66/90	2						12	1/17																				TR 46 - SHOTTED		
	198		1230				100	66/90	2						12	1/21																						
	199		1231				100	66/90	2						12	1/25																						
	200		1232				100	66/90	2						160	20	1/29																					
	201		1233				100	66/90	2						12	1/33																						
	202		1234				50	57/75	2						10	1/37																						
	203		1235				50	57/75	2						10	1/41																						
	204		1236				50	57/75	2						10	1/45																						
	205		1237				50	57/75	2						80	17	1/49																					
TAPE CHANGE																																						

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	SPREAD PATTERN
0		9	12'	INLINE	330' 48 GROUPS INLINE 24/24 SPLIT NO GAP

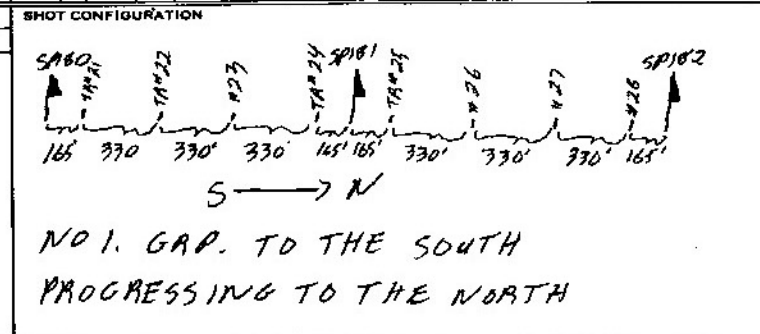

DFS III SYSTEM PARAMETERS:


GAIN CONSTANT 30 DB  
 UPPER SET LIMIT 62.5 %  
 LOWER SET LIMIT 16 %  
 FORMAT TYPE:  
 9 TRACK  21 TRACK  
 GALVO LEVEL:  
 1-24 20 DB AUX 15 DB  
 OTHER:

MISCELLANEOUS INFORMATION:

REC# 1175-1204 DAD TEST  
 REC# 1205 TEST TD.  
 REC# 1223 PULSE TEST

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																									
U.S. NAVY		1164	NPA-4	NORTH SLOPE	ALASKA	U.S.A.	700	7:30	830	900	MAR 3/75	Vic Donald	1082																									
IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN				FILTERS			REMARKS															
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL	PLAY BACK	TIME	SIZE	TOP BOT	NO CAPS	CODE	S.P. OFFSET	NO. DIR.	CODE	SPREAD	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)				FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT	NOTCH								
45	206	523221	1251	A	AAW		50	57/75	2	0		S	0	10'	10	1/5	0	✓	6SEC	OP	54	54	54	48	48	36	120	FAS	MWD 512	124	8	36	OUT	TA# 7+8 DEAD TA# 3+4 DEAD				
	207		1252				100	66/90	2																													
	208		1253				100	66/90	2																													
	209		1254				100	66/90	2																													
	210		1255				100	66/90	2																													
	211		1256				100	66/90	2																													
	212		1257				100	66/90	2																													
	213		1260				100	66/90	2																													
	214		1261				50	57/75	2		165'N																											
	215		1262				55	49/55	2																													
	216		1263				50	57/75	2		165'W		50'	13	1/45																							
	217		1264				50	57/75	2		165'N		10'	10	1/49																							
	218		1266				50	57/75	2																													
	219		1267				50	57/75	2																													
	220		1270				50	57/75	2																													
	221		1271				50	57/75	2																													
	222		1272				50	57/75	2																													
	223		1273				50	57/75	2																													
	224		1274				50	57/75	2																													
	225		1275				50	57/75	2																													
	226		1276				50	57/75	2																													
	227		1277				50	57/75	2																													
	228		1300				50	57/75	2																													
	229		1301				50	57/75	2																													
	230		1302				50	57/75	2																													
	231		1303				50	57/75	2																													
	232		1304				50	57/75	2																													
	233		1305				50	57/75	2																													

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.
0		9	330'	INLINE	330'
				48 GROUPS INLINE 24/24 SPLIT	

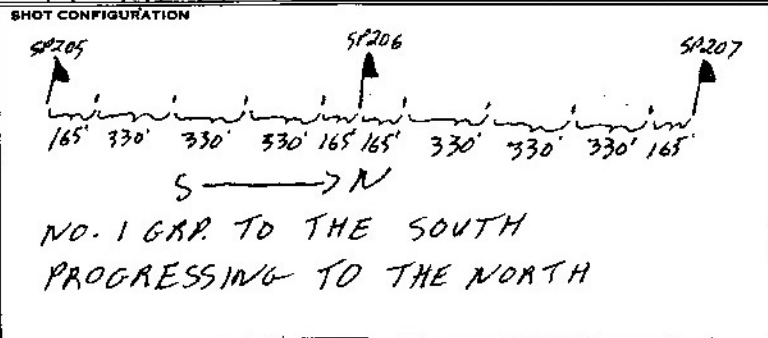

DFS IN SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB  
 UPPER SET LIMIT 62.5 %  
 LOWER SET LIMIT 18 %  
 FORMAT TYPE:  
 9 TRACK  21 TRACK  
 GALVO LEVEL:  
 1-24 21 DB AUX 15 DB  
 OTHER:

MISCELLANEOUS INFORMATION:

REC# 1240 → 1247 DRD. TEST  
 REC# 1250 - TEST TB  
 REC# 1265 - PULSE TEST



CLIENT		PARTY NO.		PROSPECT		COUNTY		STATE		COUNTRY		LEFT STORAGE		ARRIVED FIELD		LEFT FIELD		ARRIVED STORAGE		DATE		OBSERVER		PAGE											
U.S. NAVY		1184		NPA-4		NORTH SLOPE		ALASKA		USA		700		730		200		730		MAR 4 1975		V. Donald		1 of 1											
LINE	PROFILE	IDENTIFICATION		SHOT CAL.	PLAY BACK	TIME	SHOT		NO CAPS	CODE	S.P. OFFSET	NO. DIR.	CODE	SPREAD		S. R. SEIS. OFFSET	S. R. SEIS. TIME	CDP SWITCH	SETUP	TAPE				MODE	GAIN					RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	FILTERS		REMARKS
		REEL NUMBER	FILE NUMBER				SIZE	TOP BOT.						S. R. SEIS. LENGTH	PARITY ERRORS					1-4/24	5-8	9-12	13-16/17-20/21-24		FINAL GAIN DB	FREQ.	SLOPE	IN	OUT						


45	253	527222	1342	A	RAW		50	7390	2	①		S	①	10'	14'	1/1	①	65EC	OP	54	54	54	44	44	36	120	FAST	AUTO	512	124	8	36	OUT				
	254		1343				50	7390	2																												
	255		1344				50	7390	2		65'S																										
	256		1345				55	6775	2																												
	257		1346				50	5770	2																												
	258		1347				55	6775	2																												
	259		1350				55	6775	2																												
	260		1351				50	5775	2																												
	261		1352				55	6775	2																												
	262		1353				50	5775	2																												
	263		1354				55	6775	2																												
	264		1355				50	5775	2																												
	265		1356				55	6775	2																												
	266		1357				50	5775	2																												
	267		1360				50	5775	2																												

END OF LINE 45 WITH 24 GROUP TRAIL SPREAD - COMPLETE PICKUP - MOVE TO LINE 37

TR#45 DEAD

TA#

SEISMOMETER AND SPREAD INFORMATION						SHOT CONFIGURATION		DFS III SYSTEM PARAMETERS:		MISCELLANEOUS INFORMATION:	
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN					
①		9	12'	INLINE	330'	48 GROUPS INLINE 24/24 SPLIT NO GAP			GAIN CONSTANT 30 DB UPPER SET LIMIT 62.5 % LOWER SET LIMIT 18 % FORMAT TYPE: <input type="checkbox"/> 9 TRACK <input checked="" type="checkbox"/> 21 TRACK GALVO LEVEL: 1-2421 DB AUX 15 DB OTHER:	REC# 1331-1340 DAD TEST REC# 1341 TEST TB.	

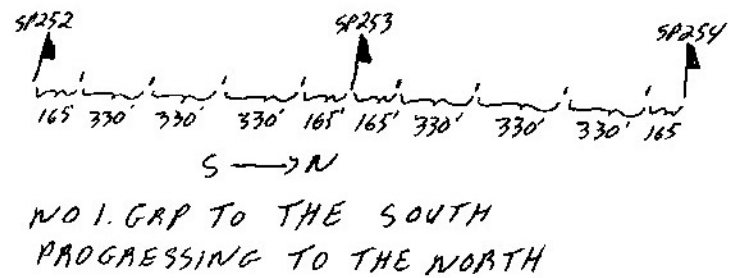

GAIN CONSTANT 30 DB  
UPPER SET LIMIT 62.5 %  
LOWER SET LIMIT 18 %  
FORMAT TYPE:  
 9 TRACK  21 TRACK  
GALVO LEVEL:  
1-2421 DB AUX 15 DB  
OTHER:

MISCELLANEOUS INFORMATION:  
REC# 1331-1340 DAD TEST  
REC# 1341 TEST TB.