

IDENTIFICATION		SHOT		SPREAD		TAPE		GAIN		FILTERS		REMARKS																			
LINE	PROFILE	REEL NUMBER	FILE NUMBER	PLAY BACK	TIME	SIZE	TOP BOT	NO CAPS	CODE	S.P. OFFSET	NO. DIR.		CODE	S. SEIS. OFFSET	SEIS. DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)	FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ	LOW CUT	NOTCH			
52	1	62250	012	1 <sup>A</sup>	MAN DEB	2:00	50	65/75	2		N	10'			1/1	1	1	1	1	1	ACC	18 24 30 36 42 48 54 60 66 72 78 84 90	90	MOD	.572	124	8	36	out	File #001 to 011 USED FOR TESTS. CABLEY J. T. TRAVIS	
	2		013	2 <sup>A</sup>	RAW	2:10	50	65/75	2						1/5																
	3		014	3 <sup>A</sup>		2:20	50	65/75	2						1/9																
	4		015	4 <sup>A</sup>		2:30	50	65/75	2						1/15																
	5		016	5 <sup>A</sup>		2:40	50	65/75	2						1/17																
	6		017	6 <sup>A</sup>		3:00	50	65/75	2						1/17	2						48	36			36	48				
	7		020	7 <sup>A</sup>		3:10	50	65/75	2						1/21																
	8		021	8 <sup>A</sup>		3:25	50	65/75	2						1/25							48	36			36	48				
	9		022	9 <sup>A</sup>		3:35	50	65/75	2						1/29																
	10		023	10 <sup>A</sup>		3:45	50	65/75	2						1/33																#47 DEAD
	11		024	11 <sup>A</sup>		4:00	50	65/75	2						1/37																
	12		025	12 <sup>A</sup>		4:10	50	65/75	2						1/41																
	13		026	13 <sup>A</sup>		5:15	50	65/75	2						1/5	3															
	14		027	14 <sup>A</sup>		5:25	50	65/75	2						1/9																
	15		030	15 <sup>A</sup>		5:35	50	65/75	2						1/13																
	16		031	16 <sup>A</sup>		5:45	50	65/75	2						1/17																#46 DEAD
	17		032	17 <sup>A</sup>		5:55	50	65/75	2						1/21																#42 "
	18		033	18 <sup>A</sup>		6:10	50	65/75	2						1/25																
	19		034	19 <sup>A</sup>		6:20	50	65/75	2						1/29																
	20		035	20 <sup>A</sup>		6:30	50	65/75	2						1/33																

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.
SAME					

SHOT CONFIGURATION

NORTH PROGRESSING SOUTH  
NO 1 TO THE NORTH

DFS III SYSTEM PARAMETERS:	
GAIN CONSTANT	30 DB
UPPER SET LIMIT	62.5 %
LOWER SET LIMIT	25 %
FORMAT TYPE:	<input type="checkbox"/> 9 TRACK <input checked="" type="checkbox"/> 21 TRACK
GALVO LEVEL:	1-20 DB AUX 15 DB
OTHER:	

MISCELLANEOUS INFORMATION:

COMPLETE LAYOUT IN  
A.M.

CLIENT	PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																									
NAVY	195	NPR-4	BARROW	ALASKA	USA	7:00	8:30	8:00	8:30	14/Jan/53	R. W. WEIR	1																									
IDENTIFICATION			SHOT		SPREAD				GAIN								FILTERS		REMARKS																		
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL.	PLAY BACK	TIME	SIZE	TOP BOT.	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. OFFSET	SEIS. DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS		RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)						FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH		
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19		20	21	22	23	24	25	26	27	28	29	30	31	32	33				
*52	65	672572	120	1A	MON JPR	12:30	50	65/75	2			N	10'			1/1	1	✓	6300	ABC		48	48	48	48	36	18	90	900	.512	174	8	36	and	FILE #115 to 117 USED FOR TESTS		
	66		121	2A	RAW	12:45	50	65/75	2							1/5																			WAITING FOR CAMP TO MOVE DOWN SPREAD		
	67		122	3A		12:55	50	65/75	2							1/9																					
	68		123	4A		1:05	50	65/75	2							1/13																				WEATHER - COLD & WINDY	
	69		124	5A		1:20	50	65/75	2							1/17																					
	70		125	6A		1:30	50	65/75	2							1/21																					
	71		126	7A		1:55	50	65/75	2							1/13	2																			FILE COUNTER SKIPPED	
	72		127	8A		2:05	50	65/75	2							1/17																					
	73		140	9A		2:10	50	65/75	2							1/21																					
	74		141	10A		2:20	50	65/75	2							1/25																				*45 DEAD	
	75		142	11A		2:30	50	65/75	2							1/29																				*41 DEAD	
	76		143	12A		2:40	50	65/75	2							1/33																				*37 "	
	77		144	13A		4:00	50	65/75	2							1/4	3																				
	78		145	14A		4:10	50	65/75	2							1/5																					*27 DEAD
	79		146	15A		4:20	50	65/75	2							1/9																					
	80		147	16A		4:35	50	65/75	2							1/13																					No File #150
	81		151	17A		4:45	50	65/75	2							1/17																					
	82		152	18A		5:00	50	65/75	2							1/21																					
	83		153	19A		5:10	50	65/75	2							1/25																					*26 SKIPPED
	84		154	20A		5:20	50	65/75	2							1/29																					*30 SKIPPED
	85		155	21A		6:00	50	65/75	2							1/5	4																				
	86		<del>156</del>	<del>22A</del>			50	<del>65/75</del>	2							1/9																					
	87		156	23A		6:20	50	65/75	2							1/13																					
	88		157	24A		6:30	50	65/75	2							1/17																					
	89		160	25A		6:40	50	65/75	2							1/21																					
	90		161	26A		6:50	50	65/75	2							1/25																					
	91		162	27A		7:00	50	65/75	2							1/29																					
	92		163	28A		7:10	50	65/75	2							1/33																					

WEATHER - COLD & WINDY

\* NOTE REMARKS  
\* 41 DEAD  
\* 37 "

FILE COUNTER SKIPPED

No File #150


SKIP - MARRIED

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

SHOT CONFIGURATION

DFS III SYSTEM PARAMETERS:  
GAIN CONSTANT 30 DB  
UPPER SET LIMIT 62.5 %  
LOWER SET LIMIT 25 %  
FORMAT TYPE:  
 9 TRACK  21 TRACK  
GALVO LEVEL:  
148.21 DB AUX 15 DB  
OTHER:

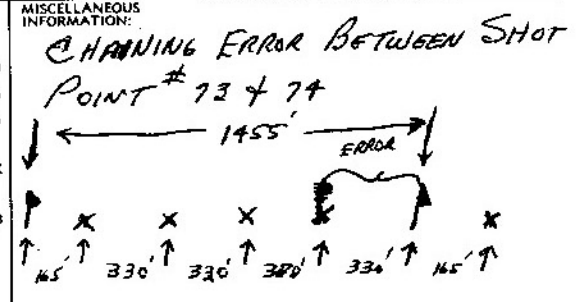

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																							
NAVY		195	NPR-4	Barrow	Alaska	USA	7:00	8:30	7:00	11:00	13/Jan/75	R. Weir	2 of 2																							
IDENTIFICATION				SHOT				SPREAD				TAPES				GAIN				FILTERS				REMARKS												
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL	PLAY BACK	TIME	SIZE	TOP BOT	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. SEIS. OFFSET	SEIS. DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)					FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH			
																		1	2	4		1-4/24	5-8		9-12	13-16	17-20	21-24				FREQ.	SLOPE	IN	OUT	
<del>49</del>	49	672572	675	29M	RAW	3:20	50	65/75	2			N	10'		1/5	4			18	26	42	48	56	64	72	80	MED	-572	124	8	36	out				
52	50		076	30M		3:30	50	65/75	2						1/9																					
	51		077	31M		3:40	50	65/75	2						1/13																					
	52		100	32M		4:10	50	65/75	2						1/17																					
	53		101	33M		4:20	50	65/75	2						1/21																					
	54		102	34M		4:30	50	65/75	2						1/25																					
	55		103	35M		4:40	50	65/75	2						1/29																					
	56		104	36M		4:50	50	65/75	2						1/33																					
	57		105	37M		5:45	50	65/75	2						1/39	5																				
	58		106	38M		5:55	50	65/75	2						1/41																					
	59		107	39M		6:05	50	65/75	2						1/45																					
	60		110	40M		6:15	50	65/75	2						1/49																					
	61		111	41M		6:25	50	65/75	2						1/53																					
	62		112	42M		6:35	50	65/75	2						1/57																					
	63		113	43M		6:45	50	65/75	2						1/61																					
	64		114	44M		7:00	50	65/75	2						1/65																					

GETTING VERY CLOUDY  
# 46 SHORTED

SEISMOMETER AND SPREAD INFORMATION						SHOT CONFIGURATION		DFS III SYSTEM PARAMETERS:		MISCELLANEOUS INFORMATION:		
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN			GAIN CONSTANT	DB		
									UPPER SET LIMIT	%		
									LOWER SET LIMIT	%		
									FORMAT TYPE:			
									<input type="checkbox"/> 9 TRACK	<input type="checkbox"/> 21 TRACK		
									GALVO LEVEL:			
									1-24	DB	AUX	DB
									OTHER:			

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																					
Navy		195	NPR-4	Barrow	ALASKA	USA	2:00	8:30	7:00	11:00	13/10/75	R. W. Wier	1																					
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL.	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	SPREAD				SAMPLER RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	GAIN					RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH IN/OUT	REMARKS
								TOP	BOT.						1-4/24	5-8	9-12	13-16					17-20	21-24	FINAL GAIN DB	FREQ.	SLOPE							

File # 036 to 040  
Used For Tests.

SKIP RIVER  
WAITING ON TUGS  
#47 DOND

No File # 064

TAPE CHANGE No Record - HIT END of TAPE

SEISMOMETER AND SPREAD INFORMATION				
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN

SHOT CONFIGURATION				
GP. INT.	SPREAD PATTERN			
		S R O M E		

DFS III SYSTEM PARAMETERS:  
GAIN CONSTANT 30 DB  
UPPER SET LIMIT 62.5 %  
LOWER SET LIMIT 25 %  
FORMAT TYPE:  
 9 TRACK  21 TRACK  
GALVO LEVEL:  
1-21 DB AUX 15 DB  
OTHER:

MISCELLANEOUS INFORMATION:

CLIENT		PARTY NO. PROSPECT		COUNTY		STATE		COUNTRY		LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																				
NAVY		195 NPR-4		BARROW		ALASKA		USA		7:00	8:00			15/11/75	R. WEIR	1																				
LINE	PROFILE	IDENTIFICATION		SHOT CAL.	PLAY BACK	TIME	SIZE	TOP BOT.	NO CAPS	CODE	S.P. OFFSET	NO. DIR.	CODE	S.P. OFFSET	SEIS DEPTH	COP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	GAIN						FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	FILTERS		NOTCH IN/OUT	REMARKS	
		REEL NUMBER	FILE NUMBER																			INITIAL GAIN (DB)										LOW CUT FREQ.	SLOPE			
																						1-4/24	5-8	9-12	13-16	17-20	21-24									
52	93	672322	195	1A	MON 708	9:35	50	65/75	2			N			10'	1/1	1	✓	6500		AGC	98	98	98	98	98	98	90	MED	124	18	36	out	*38 DEAD AMP *45 DEAD SHORT RECORD - E.O.T.		
	94		106	2A	RAW	9:45	50	65/75	2							1/5																				
	95		177	3A		10:00	50	65/75	2							1/9																				
	96		200	4A		10:10	50	65/75	2							1/13																				
	97	672573	201	5A		10:25	50	65/75	2							1/17																				
	98		202	6A		10:35	50	65/75	2							1/21																				
	99		203	7A		10:45	50	65/75	2							1/25																				
	100		204	8A		10:55	50	65/75	2							1/29																				
	101		205	9A		11:00	50	65/75	2							1/33																				
	102		206	10A		11:10	50	65/75	2							1/37																				
	103		207	11A		11:20	50	65/75	2							1/41																				
	104		210	12A		11:30	50	65/75	2							1/45																				
	105		211	13A		12:30	50	65/75	2							1/9	2																			
	106		212	14A		12:40	50	65/75	2							1/13																				
	107		213	15A		12:50	50	65/75	2							1/17																				
	108		214	16A		1:00	50	65/75	2							1/21																				
	109		215	17A		1:10	50	65/75	2							1/25																				
	110		216	18A		1:20	50	65/75	2							1/29																				
	111		217	19A		1:30	50	65/75	2							1/33																				
	112		220	20A		1:40	50	65/75	2							1/37																				
	113		221	21A		3:00	50	65/75	2							1/5	3																		Waiting Out Camp	
	114		222	22A		3:10	50	65/75	2							1/9																				
	115		223	23A		3:20	50	65/75	2							1/13																				
	116		224	24A		3:30	50	65/75	2							1/17																				
	117		225	25A		3:40	50	65/75	2							1/21																				
	118		226	26A		3:50	50	65/75	2							1/25																				
	119		227	27A		4:00	50	65/75	2							1/29																				
	120		230	28A		4:10	50	65/75	2							1/33																				

TAPE CHANGE

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
SAME						

SHOT CONFIGURATION

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB  
 UPPER SET LIMIT 62.5 %  
 LOWER SET LIMIT 25 %  
 FORMAT TYPE:  
 9 TRACK  21 TRACK  
 GALVO LEVEL:  
 1-~~10~~ 31.0B AUX 15 DB  
 OTHER:

MISCELLANEOUS INFORMATION:

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																		
NAVY		195	NPR-4	BARROW	ALASKA	USA	7:00	8:00	7:30	8:00	15/Jan/68	R. White	2 of 2																		
LINE	PROFILE	IDENTIFICATION		PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	S.P. OFFSET	SPREAD				TAPE		GAIN						RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH		REMARKS
		REEL NUMBER	FILE NUMBER				TOP	BOT.				NO. 1 DIR.	CODE	S.P. SEIS. OFFSET	SEIS. DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	1-4/24	5-8				9-12	13-16	17-20	21-24	

SEISMOMETER AND SPREAD INFORMATION						
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

SHOT CONFIGURATION	

DFS III SYSTEM PARAMETERS:	
GAIN CONSTANT	_____ DB
UPPER SET LIMIT	_____ %
LOWER SET LIMIT	_____ %
FORMAT TYPE:	
<input type="checkbox"/> 9 TRACK	<input type="checkbox"/> 21 TRACK
GALVO LEVEL:	
1-24	_____ DB AUX _____ DB
OTHER:	

MISCELLANEOUS INFORMATION:	

CLIENT		PARTY NO.		PROSPECT		COUNTY		STATE		COUNTRY		LEFT STORAGE		ARRIVED FIELD		LEFT FIELD		ARRIVED STORAGE		DATE		OBSERVER		PAGE																
NAVY		195		NPR-4		Barrow		Alaska		USA		7:00		8:00						16 hours		R. White		1 of 2																
IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN				FILTERS				REMARKS																
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL.	PLAY BACK	TIME	SIZE	TOP BOT.	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	SEIS. OFFSET	SEIS. DELT.	CDP SWITCH	SETUP	SAMPLE RATE MS				RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)					FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH				
																		1	2	4	1-24				5-8	9-12	13-16	17-20	21-24					FREQ.	SLOPE	IN	OUT			
52	129	622573	244	1A	RAW	8:30	50	6 7/8	2			N	10'		1/1	1	✓	6500				AGC	48	48	48	48	48	48	48	90	1400	1200	129	8	36	out				
	130		245	2A	RAW	8:40	50	6 7/8	2						1/5																									
	131		246	3A		8:50	50	6 7/8	2						1/9																									
	132		<del>247</del>	4A		9:00	50	6 7/8	2						1/9																									
	133		253	5A		9:20	50	6 7/8	2						1/17																									
	134		254	6A		9:30	50	6 7/8	2						1/21																									
	135		255	7A		9:40	50	6 7/8	2						1/25								48	48																
	136		256	8A		9:50	50	6 7/8	2						1/29																									
	137		257	9A		10:00	50	6 7/8	2						1/33																									
	138		260	10A		10:10	50	6 7/8	2						1/37																									
	139		261	11A		10:20	50	6 7/8	2						1/41																									
	140		262	12A		10:30	50	6 7/8	2						1/45																									
	141		<del>263</del>	13A											1/5	2																								
	142		263	14A		11:30	50	6 7/8	2						1/9																									
	143	622574	264	15A		11:35	50	6 7/8	2						1/9																									
	144		265	16A		11:45	50	6 7/8	2						1/17																									
	145		266	17A		12:00	50	6 7/8	2						1/19	3																								
	146		267	18A		12:20	50	6 7/8	2						1/1	4																								
	147		270	19A		12:30	50	6 7/8	2						1/9																									
	148		271	20A		12:40	50	6 7/8	2						1/13																									
	149		272	21A		12:55	50	6 7/8	2						1/17																									
	150		273	22A		1:05	50	6 7/8	2						1/21																									
	151		274	23A		1:25	50	6 7/8	2						1/25																									
	152		275	24A		1:35	50	6 7/8	2						1/29																									
	153		276	25A		2:00	50	6 7/8	2						1/33																									
	154		277	26A		2:10	50	6 7/8	2						1/37																									
	155		300	27A		2:20	50	6 7/8	2						1/41																									
	156		301	28A		2:30	50	6 7/8	2						1/45																									

Files #291 to 295 used for Tests.

BAD CAP - Reads but won't fire  
Picked up bad cable jerk

Files #297 MISFIRES  
250, 257, 262

DEAD CAP -  
#1 DEAD

\*40 DEAD

CDP IN WRONG POSITION.

\*99 & 46 DEAD

\*47 & 48 DEAD

SEISMOMETER AND SPREAD INFORMATION

SHOT CONFIGURATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

SAME

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT \_\_\_\_\_ DB  
 UPPER SET LIMIT \_\_\_\_\_ %  
 LOWER SET LIMIT \_\_\_\_\_ %  
 FORMAT TYPE:  
 9 TRACK  21 TRACK  
 GALVO LEVEL:  
 1-24 \_\_\_\_\_ DB AUX \_\_\_\_\_ DB  
 OTHER:

MISCELLANEOUS INFORMATION:

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																							
NAVY		195	NPR-4	BARROW	ALASKA	USA	7:00	8:00	7:30	8:00	16/Jan/68	R. WAR	2 of 2																							
IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN				FILTERS		REMARKS														
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL	PLAY BACK	TIME	SIZE	TOP BOT.	NO CAPS	CODE	S.P. OFFSET	NO. DIR.	CODE	SEIS. OFFSET	SEIS. DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE		INITIAL GAIN (DB)					FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH		
52	157	62257A	302	29A	RAW	3:20	50	65/75	2		100'S	N'	10'		1/5	5		✓	6.300			A6C	SAME					90	100	200	124	36	out	WAITING ON PERMS		
	158		303	30A		5:10	100	70/80	2						1/9																					
	159		304	31A		5:25	100	70/80	2						1/13																				COULDN'T LOAD WET	
	160		305	32A		5:35	100	75/85	2						1/17																				Holes - TRIED THEM	
	161		306	33A		6:00	100	75/85	2						1/21																				ALL AROUND LAKE	
	162		307	34A		6:30	100	75/85	2						1/25																					
	163			35A				SKIP																												
	164			36A				SKIP																												
	165			37A				SKIP																												

LAKE - COULDN'T LOAD WET HOLES SAND & SILT ON BOTTOM

COULDN'T LOAD WET HOLES - TRIED THEM ALL AROUND LAKE

SEISMOMETER AND SPREAD INFORMATION						SHOT CONFIGURATION		DFS III SYSTEM PARAMETERS:		MISCELLANEOUS INFORMATION:	
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN					
									GAIN CONSTANT	DB	
									UPPER SET LIMIT	%	
									LOWER SET LIMIT	%	
									FORMAT TYPE:		
									<input type="checkbox"/> 9 TRACK	<input type="checkbox"/> 21 TRACK	
									GALVO LEVEL:		
									1-24	DB	AUX
									OTHER:		

SAME



CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																			
NAVY		195	NPR-4	Bureau	Alaska	USA	7:00	8:00	8:30	9:00	14/04/75	R. Weir	1																			
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL	PLAY BACK	TIME	SIZE	SHOT		S.P. OFFSET	NO. 1 DIR.	CODE	S. SEIS. OFFSET	SIS. DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	GAIN					RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	FILTERS		NOTCH IN/OUT	REMARKS
								TOP	NO CAPS												INITIAL GAIN (DB)	FINAL GAIN DB	1-4/24	5-8	9-12				13-16	17-20		

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.

SHOT CONFIGURATION

S P M E

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB

UPPER SET LIMIT 62.5 %

LOWER SET LIMIT 25 %

FORMAT TYPE:

9 TRACK  21 TRACK

GALVO LEVEL:

148 21 DB AUX 15 DB

OTHER:

MISCELLANEOUS INFORMATION:

WORKING WITH 6 MAN

JUG LINE TODAY

REMARKS

File #310 to 320  
USED FOR TESTS

Cable Delay

WIP-Hole DEAD

~~START~~ Cable Delay

Wet Hole

CLIENT		PARTY NO	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																							
NAVY		195	NAC-4	BARROW	ALASKA	USA	7:00	8:00	8:30	9:00	12/11/75	R. Weir	2 of 2																							
IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN				FILTERS		REMARKS														
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL	PLAY BACK	TIME	SIZE	TOP BOT	NO CAPS	CODE	S.P. OFFSET	NO DIR	CODE	S.P. OFFSET	SEIS DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE		INITIAL GAIN (DB)					FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH		
52	194	62552	354	29A	RAW	3:35	100	75/105	2			N	40'		15	5		✓	6.00			AGC	48 48 48 48 36 24	90	MED	129	8	36	out	TAPE CHANGE						
	195		355	30A		4:00	100	75/105	2		400W				19							← HIGH PRIORITY														
	196		356	31A		4:10	100	75/105	2						113																					
	197		357	32A		4:20	100	75/105	2						117																					
	198		360	33A		4:40	100	75/105	2						121																			CABLE DELAY		
	199		361	34A		5:00	100	75/105	2						125																					
	200		362	35A		5:10	100	75/105	2						129																					
	201		363	36A		5:20	100	75/105	2						133																					
	202		364	37A		6:00	100	75/105	2						15	6																			CABLE DELAY	
	203		365	38A		6:40	100	75/105	2		150'S				19																					
	204		366	39A		6:50	100	75/105	2						113																					
	205		367	40A		7:00	100	75/105	2						117																					
	206		370	41A		7:10	100	75/105	2						121																					
	207		371	42A		7:20	100	75/105	2						125																					
	208		372	43A		7:30	100	75/105	2						129																					
	209		373	44A		7:40	100	75/105	2						133																					
	210		374	4																																

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.

SHOT CONFIGURATION

SAME

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT \_\_\_\_\_ DB

UPPER SET LIMIT \_\_\_\_\_ %

LOWER SET LIMIT \_\_\_\_\_ %

FORMAT TYPE:

9 TRACK  21 TRACK

GALVO LEVEL:

1-24 \_\_\_\_\_ DB AUX \_\_\_\_\_ DB

OTHER:

MISCELLANEOUS INFORMATION:

CLIENT		PARTY NO. / PROSPECT		COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																					
NAVY		195 NPR-4		Barrow	ALASKA	U.S.	7:00	8:00	8:30	9:00	18/06/75	R. White	1																					
LINE	PROFILE	IDENTIFICATION		SHOT CAL.	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	SPREAD		CDP SWITCH	SETUP	TAPE		MODE	GAIN						RELEASE RATE	TRIP DELAY	FILTERS			NOTCH IN/OUT	REMARKS
		REEL NUMBER	FILE NUMBER					TOP	BOT.						S.P. SEIS. OFFSET	SEIS. DEPTH			SAMPLE RATE MS	RECORD LENGTH		PARITY ERRORS	INITIAL GAIN (DB)	FINAL GAIN DB	HIGH CUT FREQ.	LOW CUT FREQ.	SLOPE							

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.
SAME					

SHOT CONFIGURATION	
SAME	

DFS III SYSTEM PARAMETERS:  
 GAIN CONSTANT 30 DB  
 UPPER SET LIMIT 62.5 %  
 LOWER SET LIMIT 25 %  
 FORMAT TYPE:  
 9 TRACK  21 TRACK  
 GALVO LEVEL:  
 1.42 21 DB AUX 15 DB  
 OTHER:

MISCELLANEOUS INFORMATION:  
 File # 376 to 576  
 USED FOR TESTS  
 SKIP-RIVER  
 \*45 DEAD  
 CAMP MOVING DOWN SPREAD  
 \*48 DEAD  
 FILE # 420 MISERE  
 CABLE DELAY  
 #1 DEAD

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																									
Navy		195	NAR-4	Barrow	Alaska	USA	7:00	8:00	8:30	9:00	18/Jan/75	R. W. ...	2 of 2																									
LINE	PROFILE	IDENTIFICATION		SHOT CAL	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	SPREAD		S.P. SEIS. OFFSET	SEIS. DEPTH	CDP SWITCH	SETUP	TAPE		RECORD LENGTH	PARITY ERRORS	MODE	GAIN					RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH		REMARKS
		REEL NUMBER	FILE NUMBER					TOP	BOT.						1	2					4	1-4/24				5-8	9-12	13-16	17-20	21-24				FINAL GAIN DB	FREQ.	SLOPE	IN	

TAPE CHANGE

CDP Wron6

SEISMOMETER AND SPREAD INFORMATION						SHOT CONFIGURATION		DFS III SYSTEM PARAMETERS:		MISCELLANEOUS INFORMATION:		
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN			GAIN CONSTANT	DB		
									UPPER SET LIMIT	%		
									LOWER SET LIMIT	%		
									FORMAT TYPE:			
									<input type="checkbox"/> 9 TRACK	<input type="checkbox"/> 21 TRACK		
									GALVO LEVEL:			
									1-24	DB	AUX	DB
									OTHER:			

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																								
NAVY		195	NPR-4	BARROW	ALASKA	US.	7:00	7:30	8:30	9:00	19/1/1975	R. WEIR	1 of 2																								
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL.	PLAY BACK	TIME	SIZE	SHOT		CODE	S.P. OFFSET	NO. 1 DIR.	CODE	SPREAD		S.EIS. OFFSET	S.D.B.P. DEPTH	COP SWITCH	SETUP	TAPE				MODE	GAIN						RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	FILTERS		NOTCH	REMARKS
								TOP	BOT.					SAMPLE RATE MS	RECORD LENGTH					PARITY ERRORS	INITIAL GAIN (DB)	FINAL GAIN DB	1-4/24		5-8	9-12	13-16	17-20	21-24	LOW CUT FREQ.				SLOPE	IN		

SEISMOMETER AND SPREAD INFORMATION					SHOT CONFIGURATION	
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
SAME						

DFS III SYSTEM PARAMETERS:	
GAIN CONSTANT	30 DB
UPPER SET LIMIT	62.5 %
LOWER SET LIMIT	25 %
FORMAT TYPE:	<input type="checkbox"/> 9 TRACK <input checked="" type="checkbox"/> 21 TRACK
GALVO LEVEL:	1.48 21 DB AUX 15 DB
OTHER:	

MISCELLANEOUS INFORMATION:

USED FOR TESTS

BOTH COPS DEAD

#48 DEAD

#48 DEAD

#49 "

BOTH COPS DEAD DOWN HOLE

GEMCO HAVING HARD TIME DEEP SNOW

SKIP - COPS DEAD DOWN HOLE

#48 DEAD

SITTING TRUCK STUCK

FILE COUNTER SHIPPED

CLIENT		PARTY NO.		PROSPECT		COUNTY		STATE		COUNTRY		LEFT STORAGE		ARRIVED FIELD		LEFT FIELD		ARRIVED STORAGE		DATE		OBSERVER		PAGE												
Navy		195		NPR-4		Barrow		Alaska		U.S.		7:00		8:30		8:30		9:00		19/00/75		R. W. K. E. R.		2 of 2												
IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN				FILTERS				REMARKS												
LINE	PROFILE	REEL NUMBER	FILM NUMBER	CAL.	PLAY BACK	TIME	SIZE	TOP BOT	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	SEIS. OFFSET	SEIS. LENGTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)					FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH			
																						1-4/24	5-8		9-12	13-16					17-20	21-24	FREQ.	SLOPE	IN	OUT
52	282	520	520	29A	RAW	5:10	100	75/105	2			N'	10'	-	1/23			✓	6500	AGC		40	70	70	40	30	24	90	MED	.512	124	8	36	out	# 45 DEAD	
	283		521	30A		5:25	100	75/105	2																											
	284		522	31A		5:32	100	75/105	2																											
	285		523	32A		5:45	100	75/105	2																											
	286		524	33A		6:00	100	75/105	2																											
	287		525	34A		6:10	100	75/105	2																											
	288		526	35A		6:20	100	75/105	2																											
	289		527	36A		6:30	100	75/105	2																											

Completed Line 52 - Complete Pickup.

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.

SHOT CONFIGURATION	

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT \_\_\_\_\_ DB

UPPER SET LIMIT \_\_\_\_\_ %

LOWER SET LIMIT \_\_\_\_\_ %

FORMAT TYPE:

9 TRACK  21 TRACK

GALVO LEVEL:

1-24 \_\_\_\_\_ DB AUX \_\_\_\_\_ DB

OTHER:

MISCELLANEOUS INFORMATION: