



CLIENT		PARTY NO.		PROSPECT		COUNTY		STATE		COUNTRY		LEFT STORAGE		ARRIVED FIELD		LEFT FIELD		ARRIVED STORAGE		DATE		OBSERVER		PAGE												
U.S.N.		182		N.P.R-4		NORTH SLOPE		ALASKA		USA										3-13-75		DOROSH		2 OF 2												
LINE	PROFILE	IDENTIFICATION		SHOT	PLAY BACK	TIME	SHOT		NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	SPREAD		TAPE		GAIN							FILTERS		REMARKS										
		REEL NUMBER	FILE NUMBER				TOP	BOT					S.P. OFFSET	SEIS. DEPTH	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)								FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT FREQ.	IN	NOTCH			
		1	2																																	
53	73	678 555	137				1150	60/75	2		S			1/1	3	✓	6	OPER.	42 60	48 60	54 60	60 54	60 48	60 42	90	FAN	60%	124	8	36						
	74		140				1150	60/75	2					1/5																						
	75		141				1150	60/75	2					1/9																						
	76		142				1150	60/75	2					1/13																						
	77		143				1150	60/75	2					1/17																						
	78		144				1150	60/75	2					1/21																						
	79		146				1150	60/75	2					1/25																						
	80		146				1150	60/75	2					1/29																						
	81		147				1150	60/75	2					1/33																						
	82		150				1150	60/75	2					1/37																						
	83		151				1150	60/75	2					1/41																						
	84		152				1150	60/75	2					1/45																						
	85		153				1150	60/75	2					1/49																						

SEISMOMETER AND SPREAD INFORMATION						SHOT CONFIGURATION		DFS III SYSTEM PARAMETERS:		MISCELLANEOUS INFORMATION:		
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN						
							SAME AS		PAGE		ONE.	
								GAIN CONSTANT 30 DB				
								UPPER SET LIMIT 62.5 %				
								LOWER SET LIMIT 18 %				
								FORMAT TYPE: TIAC				
								<input type="checkbox"/> 9 TRACK <input checked="" type="checkbox"/> 24 TRACK				
								GALVO LEVEL:				
								1-24 21 DB AUX 21 DB				
								OTHER:				

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																									
USN		182	NPR-4	NORTH SLOPE	ALASKA	USA	07:00	07:30	19:00	20:00	3-13-75	DOROSH	1 of 2																									
LINE	PROFILE	IDENTIFICATION		SHOT	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	SEIS. OFFSET	SEIS. DEPTH	SPREAD	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	GAIN						RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	FILTERS		NOTCH	REMARKS		
		REEL NUMBER	FILE NUMBER					TOP	BOT.															INITIAL GAIN (DB)	FINAL GAIN DB	LOW CUT	NOTCH											
53	52	698 555	107				1150	60/75	2				S					1	1	1	2	4		OPER	42	44	54	60	60	60	90	145	512	124	8	36		
	53		110				1150	60/75	2																													
	54		111				1150	60/75	2																													
	55		112				1150	60/75	2																													
	56		113				1150	60/75	2																													
	57		114				1150	60/75	2																													
	58		115				1150	60/75	2																													
	59		116				1150	60/75	2																													
	60		117				1150	60/75	2																													
	61		120				1150	60/75	2																													
	62		121				1150	60/75	2																													
	63		122				1150	60/75	2																													
	64		123				1150	60/75	2																													
	65		124				1150	60/75	2																													
	66		126	125 MF.			1150	60/75	2																													
	67		127				1150	60/75	2																													
	68		130				1150	60/75	2																													
	69		131				1150	60/75	2																													
	70	A	132				1150	60/75	2																													
	70	B	133				1150	105/120	2			20'E																										
	70	C	134				1150	90/105	2																													
	71		135				1150	60/75	2																													
	72		136				1150	60/75	2																													#48 - DEAD

PAGE TWO - 3

SEISMOMETER AND SPREAD INFORMATION					SHOT CONFIGURATION				DFS III SYSTEM PARAMETERS:		MISCELLANEOUS INFORMATION:	
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN						
		10R	9	25'	INLINE	330'					GAIN CONSTANT 30 DB UPPER SET LIMIT 025 % LOWER SET LIMIT 18 % FORMAT TYPE: TIALC <input type="checkbox"/> 9 TRACK <input checked="" type="checkbox"/> 12 TRACK GALVO LEVEL: 1-24 21 DB AUX 21 DB OTHER:	F-073 W/ONES F-074 - 105 DRD. F- <del>105</del> - FILTER PULSE - F-105 F-106 T.T.B.

CLIENT		PARTY NO.		PROSPECT		COUNTY		STATE		COUNTRY		LEFT STORAGE		ARRIVED FIELD		LEFT FIELD		ARRIVED STORAGE		DATE		OBSERVER		PAGE														
USN		182		NPK-4		NORTH SLOPE		ALASKA		USA										3-12-74		DOROSH		2 OF 2														
IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN						FILTERS			REMARKS													
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL.	PLAY BACK	TIME	SIZE	TOP BOT.	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. SEIS. OFFSET	SEIS. DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS				RECORD LENGTH	PARITY ERRORS	MODE		INITIAL GAIN (DB)						FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH IN
																		1	2	4						1-4/24	5-8	9-12	13-16	17-20	21-24					FREQ.	SLOPE	
53	35	698 553	050				1150	60/75	2			N				1	3		✓	6		OVER	42	48	54	60	60	60	90	FAST	512	124	8	36				
	36		051				1150	60/75	2																													
	37		052				1150	60/75	2																													
	38		053				1150	45/60	2																													
	39		054				1150	60/75	2																													
	40		-				-	-	-																													
	41		055				1150	60/75	2																													
	42		056				1150	45/60	2																													
	43		057				1150	60/75	2																													
	44		060				1150	60/75	2																													
	45		061				1150	60/75	2																													
	46		062				1150	45/60	2																													
	47		063				1150	60/75	2																													
TAPE CHANGE 064 W/ONES.																																						
48	354	065					1150	60/75	2																													
49		066					1150	60/75	2																													
GAP IN TAPE. (SEARCH FWD).																																						
50		067					1150	60/75	2																													
GAP IN TAPE (SEARCH FWD).																																						
51		070	070 MF.				1150	60/75	2																													
072 MF.																																						
TAPE CHANGE (BAD TAPE - HIGH PARITY).																																						
698																																						
553																																						

COULD NOT SKIP ~~LOAD~~ LOAD HOLE.


SEISMOMETER AND SPREAD INFORMATION						SHOT CONFIGURATION	
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN	
SAME						AS PAGE ONE.	

DFS III SYSTEM PARAMETERS:	
GAIN CONSTANT	30 DB
UPPER SET LIMIT	62.5 %
LOWER SET LIMIT	18 %
FORMAT TYPE:	T1AC
<input type="checkbox"/> 9 TRACK	<input checked="" type="checkbox"/> 21 TRACK
GALVO LEVEL:	
1-24	21 DB AUX 4 DB
OTHER:	

MISCELLANEOUS INFORMATION:	

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																					
U.S.N.		182	N.P.R-4	NORTH SLOPE	ALASKA	USA	07:00	07:30	22:00	23:00	3-14-75	DOROSH	10F2																					
LINE	PROFILE	IDENTIFICATION		SHOT	PLAY BACK	TIME	SIZE	SHOT		SPREAD				TAPE				GAIN						FILTERS		REMARKS								
		REEL NUMBER	FILE NUMBER					NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	S.P. SEIS OFFSET	NO. 2 DIR.	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)							RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT	NOTCH IN			
53	86	698 555	1166				1150	60/75	2					1/1	1	✓	6	OPER.	42	48	54	60	60	60	60	60	90	FAS	608	124	8	36		
	87		1167				1145	62/75	2																									
	88		1170				1150	60/75	2																									
TAPE CHANGE		699 530	1171	W/DNES																														
	89		1172				1150	60/75	2																									
	90		1173				1150	60/75	2																									
	91		1174				1150	60/75	2																									
	92		1175				1150	60/75	2																									
	93		1176				1150	60/75	2																									247- DEAD.
	94		1177				1150	60/75	2																								43-	
	95		200				1150	60/75	2																									
	96		201				1150	60/75	2																									
	97		202				1150	60/75	2																									
	98		203				1150	60/75	2																									
	99		204				1150	60/75	2																									
	100		205				1150	60/75	2																									
	101		206				1150	60/75	2																									
	102		207				1150	60/75	2																									
	103		210				1150	60/75	2																									
	104		211				1150	60/75	2																									
	105		212				1150	60/75	2																									
	106		213				1150	60/75	2																									
	107		214				1150	60/75	2																									
	108		215				1150	60/75	2																									
	109		216				1150	60/75	2																									
	110		217				1150	60/75	2																									
	111		220				1150	60/75	2																									

SEISMOMETER AND SPREAD INFORMATION					SHOT CONFIGURATION	
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
102	9	25'	INLINE.	330'	48 GPR SPLIT	600%

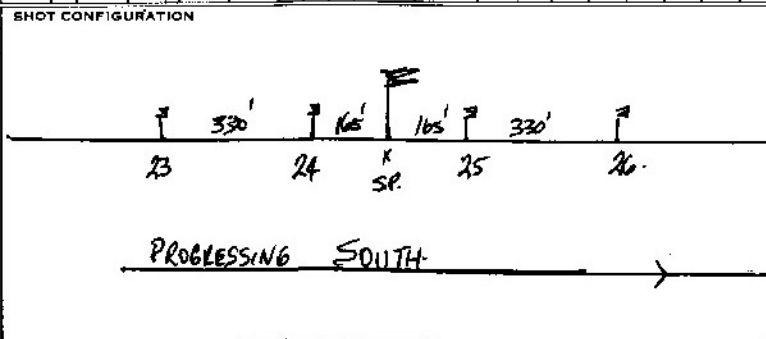

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB

UPPER SET LIMIT 62.5 %

LOWER SET LIMIT 18 %

FORMAT TYPE: TIAC

9 TRACK  21 TRACK

GALVO LEVEL:

1-24 21 DB AUX 21 DB

OTHER:

MISCELLANEOUS INFORMATION:

F-154-163 DRD.

F-164 FILTER PULSE


F-165 TTB





CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																									
U.S.N.		182	N.P.R.-4	NORTH SLOPE	ALASKA	USA	07:00	07:45	16:00	17:00	3-15-75	DOOROSH	1 OF 1																									
LINE	PROFILE	IDENTIFICATION		SHOT	PLAY BACK	TIME	SIZE	SHOT		NO. CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	SEIS. OFFSET	SPREAD	EDP SWITCH	SETUP	TAPE				MODE	GAIN								RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	FILTERS		NOTCH IN	REMARKS
		REEL NUMBER	FILE NUMBER					TOP	BOT.										1	2	4	1-4/24		5-8	9-12	13-16	17-20	21-24	FINAL GAIN DB	FREQ	SLOPE							

SEISMOMETER AND SPREAD INFORMATION						
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
	120	9	25'	INLINE	330'	48 GRP SPLIT 600%

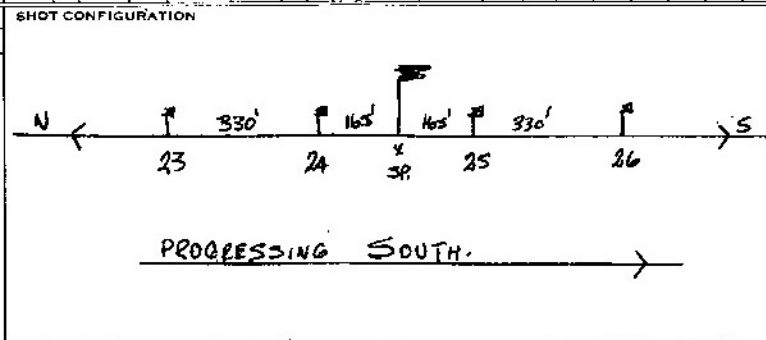

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB  
 UPPER SET LIMIT 62.5 %  
 LOWER SET LIMIT 18 %  
 FORMAT TYPE: TIAC  
 9 TRACK  24 TRACK  
 GALVO LEVEL:  
 1-24 21 DB AUX 21 DB  
 OTHER:

MISCELLANEOUS INFORMATION:

F-254-263 DRD  
 F-264 FILTER PULSE  
 F-265 TTB

PICK-UP LINE TRUCK DOWN - IN CAMP.  
 LAY-OUT TRUCK STUCK IN CREEK. WAIT  
 FOR CRT. - LAY-OUT TRUCK BACK TO CAMP  
 FOR CABLES & PHONES. LAY-OUT FOR TOMMORROW.

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																							
U.S.N.		182	N.P.R.-4	NORTH SLOPE	ALASKA	USA	07:00	08:00	17:00	18:00	3-6-75	DOROSH	10A1																							
IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN				FILTERS		REMARKS														
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL	PLAY BACK	TIME	SIZE	TOP BOT	NO CAPS	CODE	SP OFFSET	NO. 1 DIR.	CODE	SEIS OFFSET	SEIS DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE		INITIAL GAIN (DB)						FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ	LOW CUT		NOTCH IN OUT	
53	149	698 557	306				1150	60/75	2			N						1	6		OPER	42	48	54	60	60	60									
	150		307	30			1150	60/75	2																											
	151		310				1150	60/75	2																											
	152		311				1100	60/90	2																											
	153		313	312 ME			1100	60/90	2																											
	154		314				1100	60/90	2																											
	155		315				1100	60/90	2																											
	156		316				1100	60/90	2																											
	157		317				1100	60/90	2																											
	158		320				1100	60/90	2																											
	159		321				1100	60/90	2																											
	160		322				1100	60/90	2																											
	161		323				1100	60/90	2																											
	162		324				1100	60/90	2																											
	163		325				1100	60/90	2																											
	164		326				1100	60/90	2																											
	165		327				1100	60/90	2																											
	166		330				1100	60/90	2																											
	167		331				1100	60/90	2																											
	168		332				1100	60/90	2																											
	169		333				1100	60/90	2																											
	170		334				1100	60/90	2																											
													END OF LINE 53-																							
TAPES CHANGE																	PICK-UP AND MOVE TO LINE 4.																			
698 558																																				


SEISMOMETER AND SPREAD INFORMATION						SHOT CONFIGURATION		DFS III SYSTEM PARAMETERS:		MISCELLANEOUS INFORMATION:		
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN						
10A	9	25'	INLINE.	330'	48 GRP SPRT 600%				GAIN CONSTANT 30 DB UPPER SET LIMIT 625 % LOWER SET LIMIT 18 % FORMAT TYPE: TIAL <input type="checkbox"/> 9 TRACK <input checked="" type="checkbox"/> 24 TRACK GALVO LEVEL: 1-24 21 DB AUX 21 DB OTHER:		F-302-303 AGC OSC F-304 FILTER PULSE F-305 T.T.B	



CLIENT USN PARTY NO 186 PROSPECT NDR-4 COUNTY STATE ALASKA COUNTRY USA LEFT STORAGE 7:00 ARRIVED FIELD 8:00 LEFT FIELD ARRIVED STORAGE DATE 18-APR-75 OBSERVER Scott PAGE 1-0F-2

LINE	IDENTIFICATION				SHOT CAL	PLAY BACK	TIME	SHOT				SPREAD				TAPE				GAIN				FILTERS			REMARKS										
	PROFILE	REEL NUMBER	FILE NUMBER	FILE NUMBER				NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. OFFSET	NO. 2 DIR.	CODE	S.P. OFFSET	NO. 3 DIR.	CODE	S.P. OFFSET	NO. 4 DIR.	CODE	1-4/24	5-8	9-12	13-16	17-20		21-24	FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT FREQ.	SLOPE	NOTCH IN	NOTCH OUT	
53	289	13	1	110	95/105	2	A	165	N	A	G			11-9382	X	6			HCC	66	60	54	48	42	36	90	Fast	380	8	124	36	#1 → 8 dead 1 → 4 dead #3 dead					
	288	14	2	110	95/105									111																							
	287	15	3	110	89/90									115																							
	286	16	4	110	95/105									118																							
	285	17	5	110	95/105									113																							
	284	20	6	110	85/85									117																							
	283	21	7	110	95/105									121																							
	282	22	8	110	95/105									125																							
	281	23	9	110	95/105									129																							
	280	24	10	110	95/105									133																							
	279	25	11	110	95/105									137																							
	278	26	12	110	95/105									141																							
Offset	277	27	13	110	95/105									145																					Offset 165 North of strike.		
	276	28	14	110	95/105									149																							
	275	31	15	110	95/105									151	289																						
	274	32	16	110	89/90									155																							
	273	33	17	110	95/105									159																							
Offset	272	34	18	110	95/105									163																						Offset 10 FT West	
	271	35	19	110	95/105									167																							
	270	36	20	110	95/105									171																							
	269	37	21	110	95/105									175																							
	268	40	22	110	60/80									179																							
	267	41	23	110	95/105									183																							
	266	42	24	110	95/105									187																							
	265	43	25	110	95/105									191																							
	264	44	26	110	95/105									195																							
	263	45	27	110	95/105									199																							

SEISMOMETER AND SPREAD INFORMATION						
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
A	14N	9	20	New Line	330	New Line

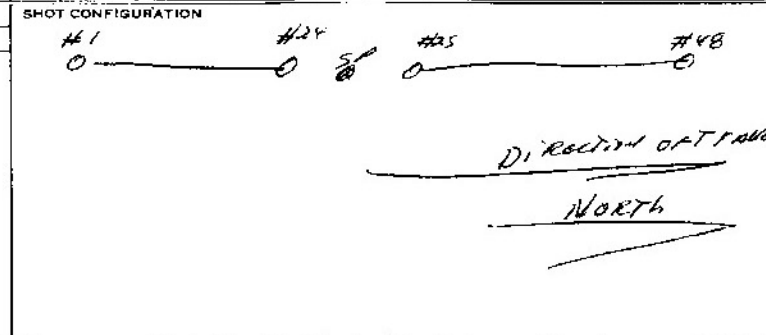

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB

UPPER SET LIMIT 75 %

LOWER SET LIMIT 25 %

FORMAT TYPE:

9 TRACK  21 TRACK

GALVO LEVEL:

1-24 15 DB AUX 15 DB

OTHER:

MISCELLANEOUS INFORMATION:

STARTED THIS LINE PUSHING #48 TO THE NORTH WITH A 16 GROUP TAILSPREAD.



CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																										
USN		186	NPK-4		ALASKA		7:00	8:00			19-APR-75	SCOTT	1-OK-																										
LINE	PROFILE	IDENTIFICATION		SHOT CAL.	PLAY BACK	TIME	SIZE	SHOT		SPREAD				TAPE				GAIN						FILTERS		REMARKS													
		REEL NUMBER	FILE NUMBER					NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. SEIS. OFFSET	SEIS. DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)						FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT FREQ.	SLOPE	NOTCH IN/OUT						
53	249	D-44	76	1			110	95/105	2	A	165	S	A	6			1/1	243	X	6		DGC	66	60	54	48	42	36	90	Fast	384	8	124	36		#63 → 71 Daily Tests. EV-75 No Record - Test T.B			
	248		77	2			110	95/105									1/5																						
	247		100	3			110	95/105									1/4																						
	246		101	4			110	95/105									1/3																						
	245		102	5			110	95/105									1/17																						
	244		103	6			110	95/105									1/21																						
	243		104	7			110	95/105									1/25																						
	242	O	105	8			110	95/105									1/29																						
	241	N	106	9			110	95/105									1/33																						
	240	O	107	10			110	95/105									1/37																						
	239	O	110	11			110	95/105									1/41																						
	238	N	111	12			110	95/105									1/45																						
	237	N	112	13			110	95/105									1/49																						
	236		113	14			110	95/105									1/5	131																					
	235		114	15			110	95/105									1/5	130																					
	234		115	16			110	95/105									1/9																						
	233		116	17			110	95/105									1/13																						
	232		117	18			110	95/105									1/17																						
	231		120	19			110	95/105									1/21																						
	230		121	20			110	95/105									1/25																						
	229		122	21			110	95/105									1/29																						
	228		123	22			110	95/105									1/33																						
	227		124	23			110	95/105									1/37																						
	226		125	24			110	95/105									1/41																						
	225		126	25			110	95/105									1/45																						
	224		127	26			110	95/105									1/49																						

wind picking up

windier and drill

SEISMOMETER AND SPREAD INFORMATION							SHOT CONFIGURATION		DFS III SYSTEM PARAMETERS:		MISCELLANEOUS INFORMATION:
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN					

GAIN CONSTANT 30 DB  
 UPPER SET LIMIT 75 %  
 LOWER SET LIMIT 25 %  
 FORMAT TYPE:  
 9 TRACK  21 TRACK  
 GALVO LEVEL:  
 I-24 15 DB AUX 15 DB  
 OTHER:

CLIENT: PARTY NO. PROSPECT: COUNTY: STATE: COUNTRY: LEFT STORAGE: ARRIVED FIELD: LEFT FIELD: 6:30 ARRIVED STORAGE: 7:30 DATE: 19 APR 75 OBSERVER: Scott PAGE: 2 of 2

LINE	PROFILE	IDENTIFICATION		SHOT CAL.	PLAY BACK	TIME	SHOT		NO. CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	SPREAD				TAPE			GAIN								FILTERS		REMARKS				
		FILE NUMBER	FILE NUMBER				TOP	BOT.						S.P. SEIS. OFFSET	NO. OF STATIONS	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)								FINAL GAIN DB		RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT
		REEL NUMBER					SIZE							1	2	4				1-4/24	5-8	9-12	13-16	17-20	21-24										
53	223	<del>130</del>	130	27			110	95/105	2										1/1																
	222		131	28			110	95/105											1/5															WIND PICKING UP	
Offset	221		132	29			110	95/105											1/9															Offset 125 FT - North west	
	220		133	30			110	95/105											1/13																
Offset	219		134	31			110	95/105											1/17																
	218		135	32			110	95/105											1/17																
	217		136	33			110	95/105											1/21																
	216		137	34			110	95/105											1/25																
	215		140	35			110	95/105											1/29																
	214		141	36			110	95/105											1/33																
	213		142	37			110	95/105											1/37																
	212		143	38			110	95/105											1/41																
	211		144	39			110	95/105											1/45																
	210		145	40			110	95/105											1/49																

SEISMOMETER AND SPREAD INFORMATION						SHOT CONFIGURATION		DFS III SYSTEM PARAMETERS:		MISCELLANEOUS INFORMATION:		
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN			GAIN CONSTANT	DB	UPPER SET LIMIT	%
									LOWER SET LIMIT	%		
									FORMAT TYPE:			
									<input type="checkbox"/> 9 TRACK	<input type="checkbox"/> 21 TRACK		
									GALVO LEVEL:			
									1-24	DB	AUX	DB
									OTHER:			


CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																								
U.S.N.		186	APR-4		ALASKA		7:00	8:00			20-APR-75	SCOTT	1-OF-2																								
LINE	PROFILE	IDENTIFICATION			PLAY BACK	TIME	SHOT		SPREAD					TAPE				GAIN						FILTERS		REMARKS											
		REEL NUMBER	FILE NUMBER	SHOT CAL.			NO CAPS	NO. 1 DIR.	NO. 2 DIR.	NO. 3 DIR.	NO. 4 DIR.	NO. 5 DIR.	NO. 6 DIR.	NO. 7 DIR.	NO. 8 DIR.	NO. 9 DIR.	NO. 10 DIR.	NO. 11 DIR.	NO. 12 DIR.	NO. 13 DIR.	NO. 14 DIR.	NO. 15 DIR.	NO. 16 DIR.	NO. 17 DIR.	NO. 18 DIR.		NO. 19 DIR.	NO. 20 DIR.	NO. 21 DIR.	NO. 22 DIR.	NO. 23 DIR.	NO. 24 DIR.	INITIAL GAIN (DB)	FINAL GAIN (DB)	RELEASE RATE	TRIP DELAY (SEC)	HIGH CUT FREQ.

D-44

# 37 THRU 48 IN LAST POSITION OF REEL BOX (CHECKING BATTERY FOR BAD FRAMES & DID NOT MOVE IT BACK.)

END OF TAPE D-44 SP-197-EVENT # 175

SEISMOMETER AND SPREAD INFORMATION						
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
A	14V	9	20	14 LINE	330	14 LINE

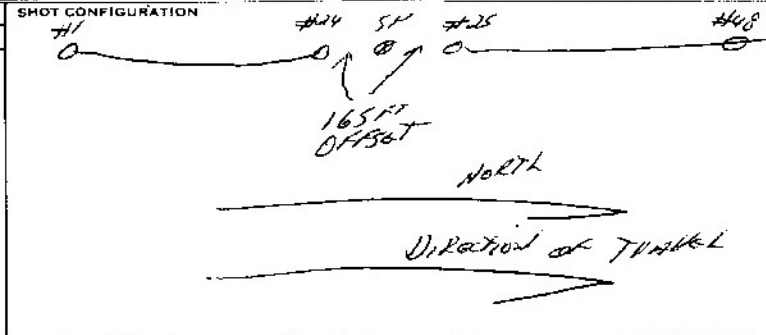

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB

UPPER SET LIMIT 75 %

LOWER SET LIMIT 25 %

FORMAT TYPE:

9 TRACK  21 TRACK

GALVO LEVEL:

1-24 15 DB AUX 15 DB

OTHER:

MISCELLANEOUS INFORMATION:

