


11 NEW LINE & NEW LINE T NEW RECORDING T 7.12

CLIENT		PARTY NO.	PROSPECT	COUNTRY	STATE	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																					
US NAVY		186	NPR-4	USA	ALASKA	7:00	9:30	7:00	8:30	24-MAR-78	SCOTT	10/1																					
LINE	PROFILE	IDENTIFICATION		SHOT CAL.	PLAY BACK	TIME	SIZE	SHOT		SPREAD				TAPE		GAIN								FILTERS		REMARKS							
		RFEL NUMBER	FILE NUMBER					NO CAPS	NO. 1 DIR.	NO. 2 DIR.	NO. 3 DIR.	NO. 4 DIR.	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)								FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT FREQ.	SLOPE	NOTCH IN
54	1	21	12	1			50	75/90	2	A	330	A	5A	1/49	7	X	6500	ABC	42	48	54	60	66	72	90	FAST	512	124	8	36	#400m		
	2		13	2			50	75/90				S		1/45																	U.H. 40 FT SHORT OF MARK. No mark hole		
	3	5/4354	14	3			50	75/90						1/41																			
	4		15	4			50	75/90						1/37																			
	5		16	5			50	75/90						1/33																			
	6		17	6			50	75/90						1/29																			
	7		20	7			50	75/90						1/25																			
	8		21	8			50	75/90						1/21																			
	9		22	9			50	75/90						1/17																			
	10		23	10			50	75/90						1/13																			
	11		24	11			50	75/90						1/9																			
	12		25	12			50	75/90						1/45																			
	13		26	13			50	75/90						1/41																			
	14		27	14			50	75/90						1/37																			
	15		30	15			50	75/90						1/33																			
	16		31	16			50	75/90						1/29																			
	17		34	17			50	75/90						1/25																			
	18		35	18			50	75/90						1/21																			
	19		36	19			50	75/90						1/17																			
	20		37	20			50	75/90						1/13																			

SEISMOMETER AND SPREAD INFORMATION						
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
21	14 ~	9	30	in line	330	in line

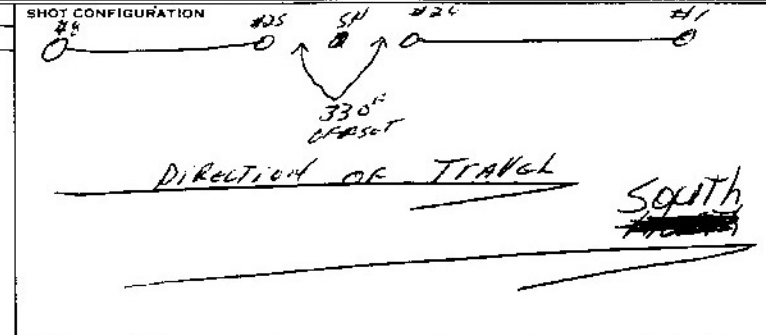

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB
 UPPER SET LIMIT 25 %
 LOWER SET LIMIT 25 %
 FORMAT TYPE:
 9 TRACK 21 TRACK
 GALVO LEVEL:
 1-24 15 DB AUX 21 DB
 OTHER:

MISCELLANEOUS INFORMATION:

TOOK 2 1/2 HRS TO RAY OUT GEOPHONES ON NEW LINE. Note
 CHANGED CHANNEL SPEED TO 7.12 INCHES PER SECOND.
 ALSO STARTED RECORDS NUMBERS AT ZERO FOR LINE 54!!
 ALSO SUNDRASE TODAY FOR THE 1ST TIME THIS YEAR!!

MISF. NO. 400-32833

RECORDER FIELD DATA TI 13230-A

CLIENT: **US NAVY** PARTY NO: **126** PROSPECT: **NPR-4** COUNTY: STATE: **NEBRASKA** COUNTRY: LEFT STORAGE: **7:00** ARRIVED FIELD: **8:00** LEFT FIELD: **9:00** ARRIVED STORAGE: **10:00** DATE: **30 JAN 75** OBSERVER: **SCOTT** PAGE: **10F2**

LINE	IDENTIFICATION			SHOT CAL	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	SPREAD		S.D. SEIS. OFFSET	SEIS. DEPTH	CDP SWITCH	SETUP	TAPE				MODE	GAIN							RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	FILTERS		NOTCH IN/OUT	REMARKS
	PROFILE	REEL NUMBER	FILE NUMBER					TOP	BOT						1	2					4	1-4/24	5-6	9-12		13-16	17-20	21-24	FINAL GAIN DB	FREQ.	SLOPE								
54	53	D-21	141	1			50	75/40	2	H	330	S	H	5				1/45	58	X	650																	#130-131 DEW #180 TEST T-13	
	54		142	2			50	75/40										1/41																					
	55		143	3			50	75/40										1/37																					
	56		144	4			50	75/40										1/33																					
	57		145	5			50	75/40										1/29																					
6 PFSOT	58		146	6			50	75/40										1/25																					
	59		147	7			50	75/40										1/21																					
	60		150	8			50	75/40										1/17																					
	61		151	9			50	75/40										1/13																					
	62		152	10			50	75/40										1/45																					
	63		153	11			50	75/40										1/41																					
	64		154	12			50	75/40										1/37																					
	65		155	13			50	75/40										1/33																					
	66		156	14			50	75/40										1/29																					
	67		157	15			50	75/40										1/25																					
	68		160	16			50	75/40										1/21																					
	69		161	17			50	75/40										1/17																					
	70		162	18			50	75/40										1/13																					
	71		163	19			50	75/40										1/9																					
	72		164	20			50	75/40										1/5																					
	73		165	21			50	75/40										1/45																					
	74		166	22			50	75/40										1/41																					
	75		167	23			50	75/40										1/37																					
	76		170	24			50	75/40										1/33																					
	77		171	25			50	75/40										1/29																					
	78		172	26			50	75/40										1/25																					
	79		173	27			50	75/40										1/21																					
	80		174	28			50	75/40										1/17																					

SEISMOMETER AND SPREAD INFORMATION						
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

SHOT CONFIGURATION	

WFS III SYSTEM PARAMETERS:
 GAIN CONSTANT 30 DB
 UPPER SET LIMIT 75 %
 LOWER SET LIMIT 25 %
 FORMAT TYPE:
 9 TRACK 21 TRACK
 GALVO LEVEL:
 1-24 45 DB AUX 21 DB
 OTHER:

MISCELLANEOUS INFORMATION:
 Base camp @ 5150 (Nasty)

LINE	PROFILE	IDENTIFICATION			SHOT	PLAY BACK	TIME	SIZE	SHOT			SPREAD					TAPE		GAIN					FILTERS		REMARKS									
		REEL NUMBER	FILE NUMBER	CAL					NO CAPS	CODE	S.P. OFFSET	NO. DIR.	CODE	S. D. S. S. S. OFFSET	SEIS. DEPTH	COP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)					FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT FREQ.	SLOPE	NOTCH		
																						1-4/24	5-8	9-12	13-16								17-20	21-24	IN
54	42	104	104	1			50	740	2	A	330	S	H	5	144	10	X	6sec	HGL	42	48	54	60	66	72	80	1	512	124	8	36			# 75-102 (200) # 103 TEST 7B # 98000	
	43		105	2			50	740						145																					
	44		106	3			50	740						146																					
		5/4354																																	
<p>TEST. PROBLEMS TOOK TO BASE CAMP FOR REPAIRS</p>																																			

SEISMOMETER AND SPREAD INFORMATION

SHOT CONFIGURATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

SHOT CONFIGURATION

DFS III SYSTEM PARAMETERS:
 GAIN CONSTANT 30 DB
 UPPER SET LIMIT 25 %
 LOWER SET LIMIT 25 %
 FORMAT TYPE:
 9 TRACK 21 TRACK
 GALVO LEVEL:
 1-24 15 DB AUX 21 DB
 OTHER:

MISCELLANEOUS INFORMATION:
 HALLING ROLLY (FATON) PROLOG-AS 15' SHOT

CLIENT: U.S. NAVY PARTY NO: 186 PROSPECT: NVR-4 COUNTY: BARROW STATE: ALASKA COUNTRY: USA LEFT STORAGE: 7:00 ARRIVED FIELD: 8:00 LEFT FIELD: ARRIVED STORAGE: DATE: Jan-75 OBSERVER: SCOTT PAGE: 10 F1

LINE	IDENTIFICATION				PLAY BACK	TIME	SIZE	SHOT				SPREAD				TAPE				GAIN					FILTERS		REMARKS						
	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL				NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S. SEIS OFFSET	S. DIR. DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)					RELEASE RATE		TRIP DELAY (sec)	HIGH CUT FREQ.	LOW CUT		NOTCH IN/OUT	
																					1-4/24	5-8	9-12	13-16	17-20					21-24	FRER		SLOPE
54	44	224	119	1			50	75/90	2	A	32	S	H	5			1/45	50	X	65u	HCC	42	45	50	60	70	90	Fast	512	124	E	3C	#108-115 DRD #116 Test TB #45 cond
	45	4	120	2			50	75/90																									Wind coming up
	46	5	121	3			50	75/90																									115
	47	5	122	4			50	75/90																									121
	48	5	123	5			50	75/90																									123
	49	5	124	6			50	75/90																									124
	50		125	7			50	75/90																									
	51		126	8			50	75/90																									
	52		127	9			50	75/90																									

Wind came up making it too rough to shoot

SEISMOMETER AND SPREAD INFORMATION						SHOT CONFIGURATION		DFS III SYSTEM PARAMETERS:		MISCELLANEOUS INFORMATION:		
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN			GAIN CONSTANT	DB		
									UPPER SET LIMIT	%	Wind blowing snow making	
									LOWER SET LIMIT	%	Just noisy	
									FORMAT TYPE:			
									<input type="checkbox"/> 9 TRACK	<input type="checkbox"/> 21 TRACK		
									GALVO LEVEL:			
									1-24	DB	AUX	DB
									OTHER:			

LINE	PROFILE	IDENTIFICATION		SHOT	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	SPREAD		TAPE		GAIN						RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	FILTERS		NOTCH IN/OUT	REMARKS					
		REEL NUMBER	FILE NUMBER					TOP	BOT						S.P. OFFSET	SEIS DEPTH	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)								LOW CUT	SLOPE							
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	FREQ.											
54	31	D-21	51	1			50	75/90		2	A	330	S	A	5		1/45	26	X	6sec	AGC	42	48	54	60	66	72	90	Fast	512	174	8	36		DRB # 40-#47 T.B. TEST #50	
	32		52	2			50	75/90									1/41																		Files had 90-100 dB	
	23		53	3			50	75/90									1/37																		Waiting out doris	
SKIP	24		54	4			50	75/90									1/33																		LAST DATE HIKATIONS FOR HIKER	
	25	514354	54	5			50	75/90									1/34																		CATS (LINE) at FRONT SPREAD	
	26		55	6			50	75/90									1/25																			
	27		56	7			50	75/90									1/21																			(175 FT NORTH OFFSET)
	28		57	8			50	75/90									1/17																		(OFFSET 30 FT NORTH)	
	29		60	9			50	75/90									1/13																			
SKIP	31			11																																
SKIP	32			12																																
	33		62	13			50	75/90									1/37																			P3 CATS at front spread
	34		63	14			50	75/90									1/33																		P3	
	35		64	15			50	75/90									1/29																			P3 CATS at front & back spread
	36		65	16			50	75/90									1/25																			P3
	37		66	17			50	75/90									1/25																			P3
	38		67	18			50	75/90									1/17																			
SKIP	39		68	19			50	75/90									1/13																			P3 EV-71 SKIPPED
	40		70	20			50	75/90									1/9																			
	41		72	21			50	75/90									1/5																			

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.

SHOT CONFIGURATION	
SPREAD PATTERN	

DFS III SYSTEM PARAMETERS:
 GAIN CONSTANT 30 DB
 UPPER SET LIMIT 75 %
 LOWER SET LIMIT 25 %
 FORMAT TYPE:
 9 TRACK 21 TRACK
 GALVO LEVEL:
 1-24 15 DB AUX 4 DB
 OTHER:

MISCELLANEOUS INFORMATION:

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																					
											30 Jan 75		2 of 2																					
LINE	PROFILE	IDENTIFICATION		SHOT CAL	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	SPREAD		CDP SWITCH	SETUP	TAPE			MODE	GAIN						RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	FILTERS		REMARKS
		REEL NUMBER	FILE NUMBER					TOP	BOT						SURF. OFFSET	DEPTH			SAMPLE RATE MS	1	2		4	1-4/24	5-8	9-12	13-16	17-20				21-24	FINAL GAIN DB	


54	81	DJ	175	29			50	75/40									4/29	48														#13-24 Reversed with #25-36 @ Rollback
	82	H	176	30			50	75/40										4/29														
	83	S	177	31			50	75/40										4/29														
	84	S	200	32			50	75/40										4/29														
	85	S	201	33			50	75/40										4/29														
	86	S	202	34			50	75/40										4/29														

END - EG LAST SP ON LINE 54 ended line with 48 full ground stations must set EG to the south.
 HASO END OF TAPE D-21 EN-202 SP-EG LAST END OF TAPE D-21

SEISMOMETER AND SPREAD INFORMATION							SHOT CONFIGURATION		DFS III SYSTEM PARAMETERS:		MISCELLANEOUS INFORMATION:	
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN			GAIN CONSTANT	DB	UPPER SET LIMIT	%
									LOWER SET LIMIT	% <td>FORMAT TYPE:</td> <td></td>	FORMAT TYPE:	
									<input type="checkbox"/> 9 TRACK	<input type="checkbox"/> 21 TRACK	GALVO LEVEL:	
									1-24	DB	AUX	DB
									OTHER:			

CLIENT		PARTY NO.		PROSPECT		COUNTY		STATE		COUNTRY		LEFT STORAGE		ARRIVED FIELD		LEFT FIELD		ARRIVED STORAGE		DATE		OBSERVER		PAGE																					
NAVY		106		NDR-4				ALASKA				7.00		9.00		6.30		8.00		7-1-75		L. Pall		1 of 1																					
IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN						FILTERS		REMARKS																					
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL	PLAY BACK	TIME	SIZE	TOP		NO CAPS	CODE	SP OFFSET	NO. 1 DIR.	CODE	S.P. SEIS OFFSET	SEIS DEPTH	CDP SWITCH	SETUP	SAMPLE RATE				RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)						FINAL GAIN DB	RELEASE RATE	TRIP DELAY AUTO	HIGH CUT FREQ.	LOW CUT		NOTCH							
								MS	1										2	4	1-4/24	5-8				9-12	13-16	17-20	21-24	FREQ.	SLOPE					IN	OUT								
54	176	28	2	1		12:30	110'	10'	10'	2	A	165'	S	A	165'	1/1	170	X	6				H-C	24	30	36	42	48	54	90	FAST	384	124	8	36	-									
	175		3	2			110'	10'	10'	2	A	165'					1/3																								No FTB				
	174		4	3			110'	10'	10'	2	A	165'					1/9																								No FTB				
	173		5	4			110'	10'	10'	2	A	165'					1/3																												
	172		6	5			110'	10'	10'	2	A	165'					1/7							H-C	30	34	42	48	54	60															
	171		7	6			110'	10'	10'	2	A	165'					1/21																												
	170		10	7			110'	10'	10'	2	A	165'					1/25							H-C	24	30	36	42	48	54	90														
	169		11	8			110'	10'	10'	2	A	165'					1/9																												
	168		12	9			110'	10'	10'	2	A	165'					1/33																												
	167		13	10			110'	10'	10'	2	A	165'					1/37	170																									between 167-168 move REV. 4P		
	166		14	11		5:27	110'	10'	10'	2	A	165'					1/5	161																											
	165		15	12			110'	10'	10'	2	A	165'					1/9																												
	164		16	13			110'	10'	10'	2	A	165'					1/13																												
	163		17	14			110'	10'	10'	2	A	165'					1/17																												
	162		20	15			110'	10'	10'	2	A	165'					1/21																												
	161		21	16			110'	10'	10'	2	A	165'					1/25																												
	160		22	17			110'	10'	10'	2	A	165'					1/29																												

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	SPREAD PATTERN
17	14HZ	9	20	Inline	330 Inline

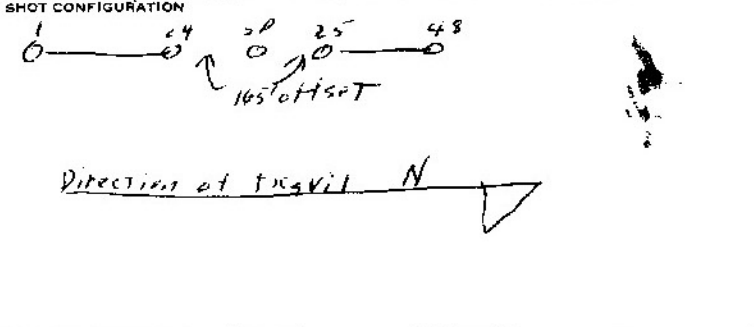

DFS III SYSTEM PARAMETERS:	
GAIN CONSTANT	30 DB
UPPER SET LIMIT	75 %
LOWER SET LIMIT	25 %
FORMAT TYPE:	<input type="checkbox"/> 9 TRACK <input checked="" type="checkbox"/> 21 TRACK
GALVO LEVEL:	1-24 21 DB AUX 21 DB
OTHER:	

MISCELLANEOUS INFORMATION:

wait on drills to finish
Laying out cables
on EV-3 trace 5' REV
between 167-168 wait on drill
from 2:00 - 4:15
Jas crew picked up one two many
cables on move up from 170 to 161

CLIENT		PARTY NO	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																						
NAVY		186	NPR-4		Alaska		7:00	4:30	8:30	9:00	7-2-75	L. Poll	1																						
LINE	PROFILE	IDENTIFICATION		SHOT CAL	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	SPREAD		CDP SWITCH	SETUP	SAMPLE RATE MS	TAPE		MODE	GAIN						FILTERS		REMARKS				
		REEL NUMBER	FILE NUMBER					TOP	BOT.						SEIS. OFFSET	SEIS. DEPTH				RECORD LENGTH	PARITY ERRORS		INITIAL GAIN (DB)	FINAL GAIN DB	RELEASE RATE	TRIP DELAY AUSE	HIGH CUT FREQ.	LOW CUT	NOTCH						
54	159	24	1			9:56	110' 95'	165'	2	A	165'	S	A	6'	1/5	154	X	6	ALC	44	30	36	42	48	54	90	1797	384	124	8	36	-			
	158	25	2				110' 95'	165'			165'			6'	1/9																				
	157	26	3				110' 95'	165'			165'			6'	1/13																				
	156	27	4				110' 95'	165'			165'			6'	1/17																				
	155	30	5				110' 95'	165'			165'			6'	1/21																				
	154	31	6				110' 95'	165'			165'			6'	1/25																				
	153	32	7				110' 95'	165'			165'			6'	1/29																				
	152	32	8				110' 95'	165'			165'			6'	1/33																				
	151	33	9				110' 95'	165'			165'			6'	1/37																				
	150	34	10				110' 95'	165'			165'			6'	1/41																				
	149	35	11				110' 95'	165'			165'			6'	1/45																				
	148	36	12				110' 95'	165'			165'			6'	1/49																				
	147	37	13				110' 95'	165'			165'			6'	1/53																				
	146	40	14				110' 95'	165'			165'			6'	1/57																				
	145	41	15				110' 95'	165'			165'			6'	1/61																				
	144	42	16				110' 95'	165'			165'			6'	1/65																				
	143	43	17				110' 95'	165'			165'			6'	1/69																				
	142	44	18				110' 95'	165'			165'			6'	1/73																				
	141	45	19				110' 95'	165'			165'			6'	1/77																				
	140	46	20				110' 95'	165'			165'			6'	1/81																				
	139	47	21				110' 95'	165'			165'			6'	1/85																				
	138	50	22				110' 95'	165'			165'			6'	1/89																				
	137	51	23				110' 95'	165'			165'			6'	1/93																				
	136	52	24				110' 95'	165'			165'			6'	1/97																				
	135	53	25				110' 95'	165'			165'			6'	1/101																				
	134	54	26				110' 95'	165'			165'			6'	1/105																				
	133	55	27				110' 95'	165'			165'			6'	1/109																				
	132	56	28			3:44	110' 95'	165'			165'			6'	1/113																				


TWO EV-32 ON TOPC due to bad ILL logic offset 80' SOUTH

SFS No 600 d
SFS No 600 d

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
A	1442	9	20'	Inline	330	Inline

SHOT CONFIGURATION

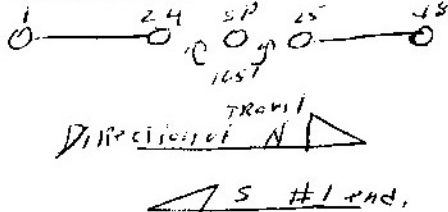

DFS III SYSTEM PARAMETERS:


GAIN CONSTANT 30 DB
 UPPER SET LIMIT 75 %
 LOWER SET LIMIT 25 %
 FORMAT TYPE:
 9 TRACK 21 TRACK
 GALVO LEVEL:
 1-24 21 DB AUX 21 DB
 OTHER:

MISCELLANEOUS INFORMATION:

Recording truck late to field motor quit during night took 1/2 hr. to start. Had to stop shooting caught up to drills

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																		
NAVY		156	NPR-4		Alaska		7.00	7.30	9.00	10.00	4-3-75	J. Poff	1 of 1																		
LINE	PROFILE	IDENTIFICATION		SHOT CAL	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	S.P. OFFSET	NO. DIR.	CODE	SPREAD			TAPE		GAIN					FILTERS			REMARKS			
		REEL NUMBER	FILE NUMBER					TOP	BOT						S.P.	SEIS. DEPTH	CDP SWITCH	SETUP	SAMPLE RATE	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)						FINAL GAIN DB	RELEASE RATE	TRIP DELAY
																		1-4/24	5-8	9-12	13-16	17-20	21-24				FREQ.	SLOPE	IN	OUT	

SEISMOMETER AND SPREAD INFORMATION						
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
H	14A2	9	20'	Inline	330'	Inline

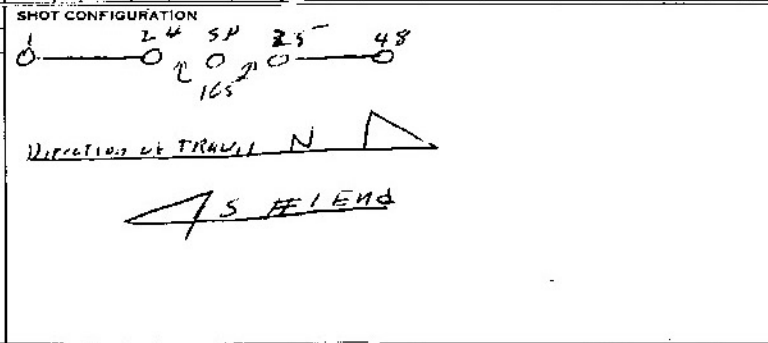

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB

UPPER SET LIMIT 75 %

LOWER SET LIMIT 25 %

FORMAT TYPE:

9 TRACK 21 TRACK

GALVO LEVEL:

1-24 21 DB AUX 21 DB

OTHER:

MISCELLANEOUS INFORMATION: Wind blowing about 15-20 MPH. ~~at~~ Late start changed five bad cables between SP-124 B + 125 shooting went down had to wait on preloading truck to move back as shooting track.

TEST SHOT for CLIENT

Reloading for Parallel shot

offset 80' North

REMARKS DRD-1-10 APR 11-12 LAS 11-13 Test time break 27

CLIENT		PARTY NO.		PROSPECT		COUNTY		STATE		COUNTRY		LEFT STORAGE		ARRIVED FIELD		LEFT FIELD		ARRIVED STORAGE		DATE		OBSERVER		PAGE												
NAVY		186		NPR-4				Mass				7:00		8:30				5:00		4-4-75		L. Poll		1 of												
LINE	PROFILE	IDENTIFICATION		SHOT	PLAY BACK	TIME	SIZE	SHOT		SPREAD				TAPE		GAIN						FILTERS			REMARKS											
		REEL NUMBER	FILE NUMBER					TOP	BOT.	NO CAPS	DE CODE	S.P. OFFSET	NO. DIR.	CODE	S.R. OFFSET	S.D. IN	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)						FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH	
																		1-4	5-8	9-12	13-16	17-20	21-24													
4	113	D-38	174	1			110.32	10.5	2	12	10.5	5	11		1/2	10.5	8	6	AV-C	30	30	42	48	54	60	90	Fast	384	124	8	36	-	Trace # 39 d-d			
	112		105	2			110	10.5	2	10.5	5				1/2																					

SEISMOMETER AND SPREAD INFORMATION						
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
4	1412	7	20	Inline	300	Inline

SHOT CONFIGURATION	

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB

UPPER SET LIMIT 75 %

LOWER SET LIMIT 25 %

FORMAT TYPE:

9 TRACK 21 TRACK

GALVO LEVEL:

1-24 _____ DB AUX _____ DB

OTHER:


MISCELLANEOUS INFORMATION:

CLIENT: **NAVY** PARTY NO: **186** PROSPECT: **NPR-4** COUNTY: STATE: **ALASKA** COUNTRY: LEFT STORAGE: **7:00** ARRIVED FIELD: **3:00** LEFT FIELD: ARRIVED STORAGE: **5:00** DATE: **7-5-75** OBSERVER: **T. Kelly** PAGE: **1 of 1**

IDENTIFICATION				SHOT		SPREAD				TAPE		GAIN						FILTERS			REMARKS																															
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL	PLAY BACK	TIME	SIZE	TOP BOT	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S. SEIS. OFFSET	S. SEIS. DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)						FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT	SLOPE	NOTCH IN OUT	REMARKS																	
																						1-4/24	5-8	9-12	13-16	17-20	21-24																									
54	112	D38	106	1		10.34	110	95/105	2	X	165	S	A	6'		1/1	106	X	6		AG-L	30	36	42	54	60	60	90	Fast	387	124	8	36	-	1st - 1 - 14 cont																	
	111		107	2			110	95/105	2		165			6'		1/2																																				
	110		110	3			110	95/105	2		165			6'		1/4																																				
	109		111	4			110	95/105	2		165			6'		1/3																																				
	108		112	5			110	95/105	2		165			6'		1/7																																				

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
17	14 Hz	49	20'	LINE	330	LINE

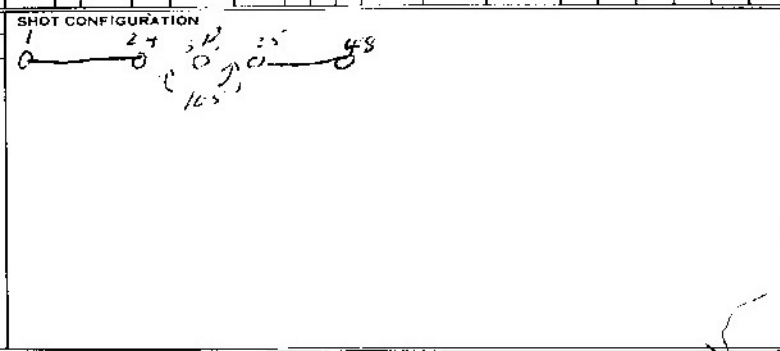

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 20 DB
 UPPER SET LIMIT 75 %
 LOWER SET LIMIT 25 %
 FORMAT TYPE:
 9 TRACK 21 TRACK
 GALVO LEVEL:
 1-24 75 DB AUX 75 DB
 OTHER:

MISCELLANEOUS INFORMATION:

CLIENT		PARTY NO.		PROSPECT		COUNTY		STATE		COUNTRY		LEFT STORAGE		ARRIVED FIELD		LEFT FIELD		ARRIVED STORAGE		DATE		OBSERVER		PAGE												
NAVY		186		NPK-9				Hawaii														J. Poll		2 of												
IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN						FILTERS			REMARKS											
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL.	PLAY BACK	TIME	SIZE	TOP BOT.	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. OFFSET	SIS DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)						FINAL GAIN DB	RELEASE RATE	TRIP DELAY AUSE	HIGH CUT FREQ.	LOW CUT		NOTCH		
																						1-4	7-8	9-12		13-16	17-20					21-24	FREQ.	SLOPE	IN	OUT
34	107	D39	113	6		12:35	110	9/10	2	A	165	S	A	6		1/21	106	X				ARC	30	34	42	54	60	60		Fast	384	129	8	36	-	

SEISMOMETER AND SPREAD INFORMATION							SHOT CONFIGURATION		DFS III SYSTEM PARAMETERS:		MISCELLANEOUS INFORMATION:	
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN			GAIN CONSTANT	UPPER SET LIMIT	LOWER SET LIMIT	FORMAT TYPE:
									30 DB	75 %	25 %	<input type="checkbox"/> 9 TRACK <input checked="" type="checkbox"/> 21 TRACK
									GALVO LEVEL:	1-24 15 DB AUX 15 DB		
									OTHER:			
									To windy to shoot went to camp.			

CLIENT: U.S.N. PARTY NO: 46 PROSPECT: NPR-4 COUNTY: STATE: Alaska COUNTRY: LEFT STORAGE: 7:00 ARRIVED FIELD: 8:00 LEFT FIELD: 6:00 ARRIVED STORAGE: 7:00 DATE: 6-APR-5 OBSERVER: Scott PAGE: 10 of 1


LINE	PROFILE	IDENTIFICATION		SHOT CAL	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	SP OFFSET	NO. 1 DIR.	CODE	SPREAD		TAPE		GAIN					RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	FILTERS		REMARKS				
		REEL NUMBER	FILE NUMBER					TOP	BOT						SEIS DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)					FINAL GAIN DB	LOW CUT		NOTCH			
																	1	2	4	5-8	9-12	13-16	17-20	21-24	FREQ.		SLOPE	IN	OUT				
54	106	131	131	1			105	95/105	2	A	165	N	A	6	1/1	100	X	6	AGC	66	60	58	48	42	36	90	fast	381	8	121	36	#130 Test T.G.	
	105	132	132	2			105	95/105							1/5																#2 down		
	104	133	133	3			105	95/105							1/9																		
	103	134	134	4			105	95/105							1/13																		
SKIP	102	135	135	5			105	95/105							1/17																	used 21 GALVO LEVEL	
	101	135	135	6			105	85/95							1/21																		
	100	136	136	7			105	95/105							1/25																		
	99	137	137	8			105	95/105							1/29																		
	98	140	140	9			105	95/105							1/33																		
	97	141	141	10			105	95/105							1/37																		
	96	142	142	11			105	95/105							1/41	90																	
	95	143	143	12			105	95/105							1/5																		
	94	144	144	13			105	95/105							1/9																		
	93	145	145	14			105	95/105							1/15																		
	92	146	146	15			105	95/105							1/17																		
	91	147	147	16			105	95/105							1/21																		
	90	150	150	17			105	95/105							1/25																		
	89	151	151	18			105	95/105							1/29																		
	88	152	152	19			105	95/105							1/33																		
	87	153	153	20			105	95/105							1/37																		
	86	154	154	21			105	95/105							1/41																		
	86B	155	155	22			105	95/105							1/44																		

"SKIPPED due to noise caused in UNABLE TO LOAD"

SHOT IN WRONG POSITION DIDNT MAKE REF BOX
Possibly only 5th fired.

OFFSET 40 FT NORTHWEST OF SP. 86

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	SPREAD PATTERN
A	14 Hz	9	20'	Inline	330' Inline

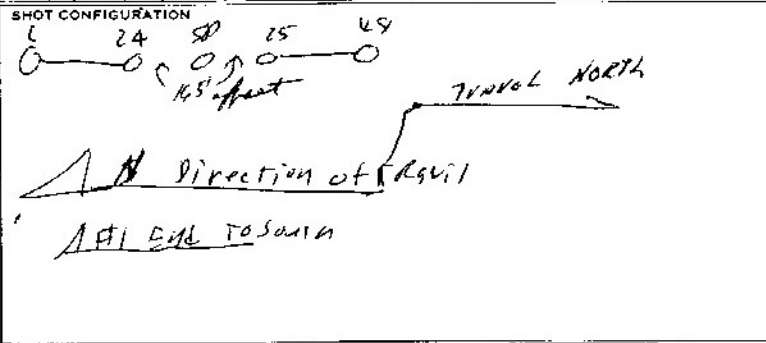

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB
UPPER SET LIMIT 75 %
LOWER SET LIMIT 25 %

FORMAT TYPE:
 9 TRACK 21 TRACK

GALVO LEVEL:
1-24 15 DB AUX 15 DB

OTHER:

MISCELLANEOUS INFORMATION:

CLIFHT		PARTY NO / PROSPECT		COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																										
NAVY		195 NPR 4		Barrow	ALASKA	U.S.A.	7:00				17 MAR 75	NEIGHBORS	1																										
LINE	PROFILE	IDENTIFICATION		SHOT CAL	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	SPREAD			CDP SWITCH	SETUP	SAMPLE RATE MS				RECORD LENGTH	PARITY ERRORS	MODE	GAIN					RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	FILTERS		NOTCH IN	OUT	REMARKS
		FILE NUMBER	REEL NUMBER					TOP	BOT						SEIS SURF. OFFSET	SEIS DEPTH	1			2	4	INITIAL GAIN (DB)	FINAL GAIN DB				1-4/24	5-8	9-12	13-16	17-20				21-24	LOW CUT			
34 X		02552		RAW									S		10							✓	6	AGC	48	48	48	48	42	36	90	MED	512	124	8	36	OUT		

No PRODUCTION
TO MUCH WIND &
BLOWING SNOW

SEISMOMETER AND SPREAD INFORMATION						SHOT CONFIGURATION		DFS III SYSTEM PARAMETERS:		MISCELLANEOUS INFORMATION:	
CODE	SEIS TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN			GAIN CONSTANT	UPPER SET LIMIT	LOWER SET LIMIT
	MANUAL	9	35	IN LINE	1320		SINGLE HOLES		30	62.5	25
	8412								FORMAT TYPE:	<input type="checkbox"/> 9 TRACK <input checked="" type="checkbox"/> 21 TRACK GALVO LEVEL: 1-24 21 DB AUX 15 DB OTHER:	