


CLIENT: **USN** PARTY NO: **186** PROSPECT: **NPR-4** COUNTY: STATE: **ALASKA** COUNTRY: LEFT STORAGE: **9:00** ARRIVED FIELD: **8:00** LEFT FIELD: **8:00** ARRIVED STORAGE: **9:00** DATE: **7-APR-75** OBSERVER: **SCOTT** PAGE: **1-02-1**

IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN						FILTERS		REMARKS																																	
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL	PLAY BACK	TIME	SIZE	TOP BOT	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S. SEIS. OFFSET	SEIS. DEPTH	COP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)						FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ	LOW CUT		NOTCH																							
																						1-4/24	5-8	9-12	13-16	17-20	21-24	FREQ		SLOPE		IN		OUT																							
66	1	D40	15	1			105	45/105	2	A	165	N	A	6		1/1	7	X	6500		AGC	66	60	54	48	42	36	90	Fast	381	8	104	36	-																							
	2		16	2			105	45/105								1/5																																									
	3		17	3			105	45/105								1/9																																									
	4		20	4			105	45/105								1/13																																									
	5		21	5			105	45/105								1/17																																									
	6	526016	22	6			105	45/105								1/21																			1436448																						
	7		23	7			105	45/105								1/25																																									
	8		24	8			105	45/105								1/29																																									
	9		25	9			105	45/105								1/33																																									
	10		26	10			105	45/105								1/37																																									
	11		27	11			105	45/105								1/41																																									
	12		30	12			105	45/105								1/45																																									
	13		31	13			105	45/105								1/49	18																		APR 26 01 75																						
	14		32	14			105	45/105								1/19																																									
	15		33	15			105	45/105								1/13																																									
	16		34	16			105	45/105								1/17																																									
	17		35	17			105	45/105								1/21																																									
	18		36	18			105	45/105								1/25																																									
	19		37	19			105	45/105								1/29																																									
	20		38	20			105	45/105								1/33																																									
	21		41	21			105	45/105								1/37																																									
	22		42	22			105	45/105								1/41																																									
	23		43	23			105	45/105								1/45																																									
	24		44	24			105	45/105								1/49																																									
	25		45	25			105	45/105								1/49	19																																								

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.
17	M14N	9	20	IN LINE	330
SHOT CONFIGURATION					
#1 24 50 48 165 FT OFFSET DIRECTION OF TRAVEL SOUTH					

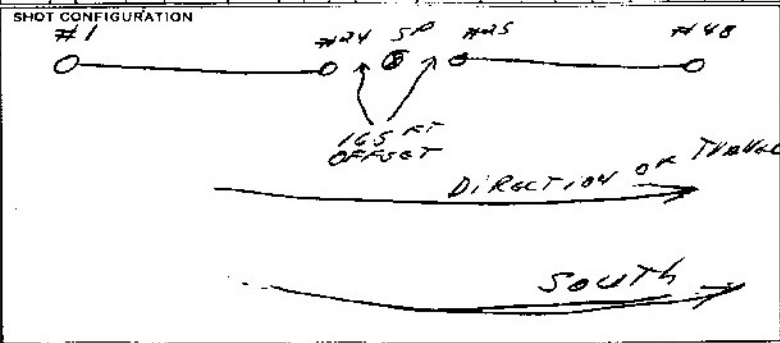

DFS III SYSTEM PARAMETERS:
 GAIN CONSTANT 30 DB
 UPPER SET LIMIT 75 %
 LOWER SET LIMIT 25 %
 FORMAT TYPE:
 9 TRACK 21 TRACK
 GALVO LEVEL:
 1-24 15 DB AUX 15 DB
 OTHER:

MISCELLANEOUS INFORMATION:
 STARTED L-66 WITH 48 LIVE GROUND
 PUSHING #48 TO THE SOUTH
 AT THE REQUEST OF CLIENT ALL GAINS MUST BE
 ALIVE TO SHOOT, DUE TO MANY BOOS BAD, 90 IS
 IS VERY SLOW, ONLY HAVE A TROUGH BOOS TO SHOOT
 L HOOKS BEFORE SWITCHING MODE AHEAD!!

END OF TAPE D-40

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																			
U.S.N.		186	NPR-4		ALASKA		7:00	8:00	6:00	7:00	11 APR 75	SCOTT	1-05																			
LINE	PROFILE	IDENTIFICATION		SHOT CAL	PLAY BACK	TIME	SHOT		NO CAPS	CODE	S.P. OFFSET	SPREAD			TAPE			GAIN						FILTERS			REMARKS					
		REEL NUMBER	FILE NUMBER				SIZE	TOP				NO. 1 DIR.	S.P. SEIS DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)						FINAL GAIN DB		RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT	NOTCH
							SIZE	TOP										1-4/24	5-8	9-12	13-16	17-20	21-24									

SEISMOMETER AND SPREAD INFORMATION						SHOT CONFIGURATION		DFS III SYSTEM PARAMETERS:		MISCELLANEOUS INFORMATION:	
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN			GAIN CONSTANT	UPPER SET LIMIT	LOWER SET LIMIT
									30	75	25
									FORMAT TYPE:		
									<input type="checkbox"/> 9 TRACK	<input checked="" type="checkbox"/> 21 TRACK	
									GALVO LEVEL:		
									1-24 15 DB	AUX 6 DB	
									OTHER:		

END OF TAPE D-40

Waiting on drills
Replaced Bad Cable
#1 dead

Changed cable

REMARKS
2157 TESTS BY-135-147

CLIENT: **USN** PARTY NO: **186** PROSPECT: **N72-4** COUNTY: _____ STATE: **ALASKA** COUNTRY: _____ LEFT STORAGE: **7:00** ARRIVED FIELD: **9:00** LEFT FIELD: **6:00** ARRIVED STORAGE: **7:00** DATE: **9-MAR-75** OBSERVER: **SCOTT** PAGE: **1 of 1**

LINE	PROFILE	IDENTIFICATION		SHOT CAL	PLAY BACK	TIME	SHOT		SPREAD						TAPE			GAIN								FILTERS		REMARKS						
		REEL NUMBER	FILE NUMBER				NO CAPS	TOP	S.P. OFFSET	NO. 1 DIR.	CODE	G.P. DIR.	SEIS. DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)									RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH
																				1	2	4	1-4/24	5-8	9-12	13-16	17-20					21-24	FINAL GAIN DB	
66	37	106	106	1			105	95/105	2	165	5	6	1/9	41	X	6sec	196	66	66	54	48	42	36	90	Fast	300	8	124	36		Daily Test EV. 74 → 105			
	38	526016	107	2			105	95/105																										
	39		110	3			105	95/105																									713 FIRM EV-110	
	40		112	4			105	95/105																										
	41		113	5			105	95/105																										
	42		114	6			105	95/105																										
	43		115	7			105	95/105																										
	44		116	8			105	95/105																									Record needs to be reviewed	
	45		118	9			105	95/105																										
	46		117	10			105	95/105																										
	47		120	11			105	95/105																										
	48		121	12			105	95/105																										
	49		122	13			105	95/105																										
	50		123	14			105	95/105																										
	51		124	15			105	95/105																										
	52		125	16			105	95/105																										ALL OF CHANNELS did not fire
	53		126	17			105	95/105																										
	54		128	18			105	95/105																										
	55		130	19			105	95/105																										
	56		131	20			105	95/105																										
	57		132	21			105	95/105																										
	58		133	22			105	95/105																										
	59		134	23			105	95/105																										Changed cable.

SEISMOMETER AND SPREAD INFORMATION						SHOT CONFIGURATION		DFS III SYSTEM PARAMETERS:		MISCELLANEOUS INFORMATION:	
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN					
									GAIN CONSTANT	30	DB
									UPPER SET LIMIT	75	%
									LOWER SET LIMIT	25	%
									FORMAT TYPE:		
									<input type="checkbox"/> 9 TRACK	<input checked="" type="checkbox"/> 21 TRACK	
									GALVO LEVEL:		
									1-24	12	DB
									AUX	15	DB
									OTHER:		

Need a startlock logic check.

CLIENT		PARTY NO	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																				
		186	NPE-4					6:00	7:00	11-APR-75	Scott	20F-2																					
LINE	IDENTIFICATION				PLAY BACK	TIME	SHOT				SPREAD			TAPE		GAIN							FILTERS		REMARKS								
	PROFILE	REEL NUMBER	FILE NUMBER	SHOT			SIZE	TOP	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. SEIS. OFFSET	SEIS. DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)					FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT	NOTCH IN	
				CAL.				BOT.										1	2	4		1-4/24	5-8	9-12		13-16	17-20	21-24					OUT

SEISMOMETER AND SPREAD INFORMATION						
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

SHOT CONFIGURATION

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT _____ DB

UPPER SET LIMIT _____ %

LOWER SET LIMIT _____ %

FORMAT TYPE:

9 TRACK 21 TRACK

GALVO LEVEL:


1-24 _____ DB AUX _____ DB

OTHER:

MISCELLANEOUS INFORMATION:

CLIENT		PARTY NO. PROSPECT		COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																									
USA		186	NPR-4		ALASKA		7:00	8:00	5:30	6:00	12-III-75	SCOTT	1-OF-																									
IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN				FILTERS		REMARKS																
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL.	PLAY BACK	TIME	SIZE	TOP BOT.	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	R. S. S. OFFSET	DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE		INITIAL GAIN (DB)				FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	FREQ.	SLOPE	NOTCH IN OUT					
66	117	DEA	253	1			105	95/105	2	19	165	S	A	6		1/1	124	X	6		H6C	44	60	54	48	42	36	90	FEET	512	8	124	36		Roll Bar. & wireway pos. 77' old #86 and. Cherted end cable			
	118		254	2			105	95/105								1/1																						
	119		255	3			105	95/105								1/5																						
	120		256	4			105	95/105								1/9																						
	121		259	5			105	95/105								1/13																						
	122		260	6			105	95/105								1/17																						
	123		261	7			105	95/105								1/21																						
	124		262	8			105	95/105								1/25																						
	125		263	9			105	95/105								1/5	130																					
	126	109	264	10			105	95/105								1/9																						
	127		265	11			105	95/105								1/13																						
	128		266	12			105	95/105								1/17																						
	129		267	13			105	95/105								1/21																						
	130		270	14			105	95/105								1/5	135																					
	131		271	15			105	95/105								1/9																						
	132		272	16			105	95/105								1/13																						
	133		274	17			105	95/105								1/17																						
	134		275	18			105	95/105								1/21																						
	135		276	19			105	95/105								1/5	140																					
	136		277	30			105	95/105								1/9																						
	137		300	21			105	95/105								1/13																						

SEISMOMETER AND SPREAD INFORMATION						
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
H	142	9	20	1-11-16	330	1-11-16

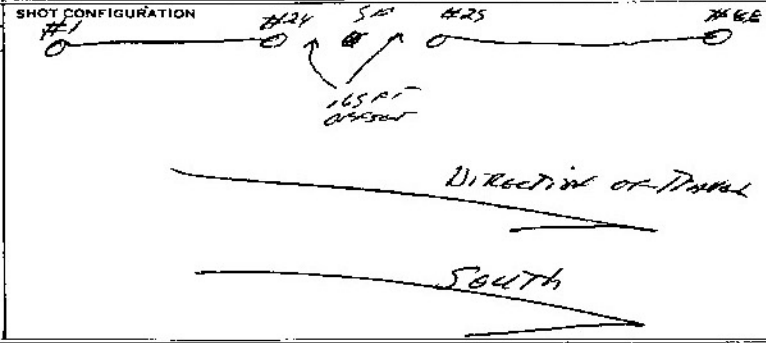

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB

UPPER SET LIMIT 25 %

LOWER SET LIMIT 05 %

FORMAT TYPE:

9 TRACK 21 TRACK

GALVO LEVEL:

1-24 15 DB AUX 15 DB

OTHER:

MISCELLANEOUS INFORMATION:

SP-117 SETUP @ SP-124 instead of SP-123. FOR SP-110 ROLL BAR CORRECT.

END OF TAPE D-41

CLIENT			PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																								
USN			186	NR-4		ARKANSAS		7100	8:00	6:00	7:00	13-APR-75	SCOTT	10-F-1																								
IDENTIFICATION				SHOT				SPREAD						TAPE				GAIN					FILTERS			REMARKS												
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL.	PLAY BACK	TIME	SIZE	TOP	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	NO. 2 DIR.	OFFSET	DEPT.	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)					FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT	NOTCH					
								BOT.											1	2	4			1-4/24	5-8		9-12	13-16/7	20-21-24				FREQ.	SLOPE	IN	OUT		
66	138	313	313	1			105	95/105	2	H	165	S	A	165			1/1	149	X	6		ABC	66	60	54	48	42	36	90	Fast	304	8	12	30		20.24 tests # 311-312		
	139	314	314	2			105	95/105									1/5																				weak shot	
	140	315	315	3			105	95/105									1/9																				waiting on drill	
	141	316	316	4			105	95/105									1/13																					
	142	317	317	5			105	95/105									1/17																					
	143	320	320	6			105	95/105									1/21																					
	144	321	321	7			105	95/105									1/11	150																				
	145	322	322	8			105	95/105									1/5																					
	146	323	323	9			105	95/105									1/9																					
	147	324	324	10			105	95/105									1/13																					
	148	325	325	11			105	95/105									1/17																					
	149	326	326	12			105	95/105									1/21																					
	150	327	327	13			105	95/105									1/25																					
	151	330	330	14			105	95/105									1/15	156																			weak shot??	
	152	331	331	15			105	95/105									1/9																					
	153	332	332	16			105	95/105									1/13																					drills and kins
	154	333	333	17			105	95/105									1/17																					
	155	334	334	18			105	95/105									1/21																					
	156	335	335	19			105	95/105									1/25																					wind picking up
	157	336	336	20			105	95/105									1/29																					
	158	337	337	21			105	95/105									1/33																					
	159	340	340	22			105	95/105									1/37																					wind picking up
	160	341	341	23			105	95/105									1/41																					
	161	342	342	24			105	95/105									1/45																					
	162	343	343	25			105	95/105									1/49																					

END OF TAPE D-41


Picked up all sites' feathers

ended kins 66 with 98 live groups parking #48 to the south

SEISMO METER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
A	142	4	20	1st kins	370	2nd kins

SHOT CONFIGURATION

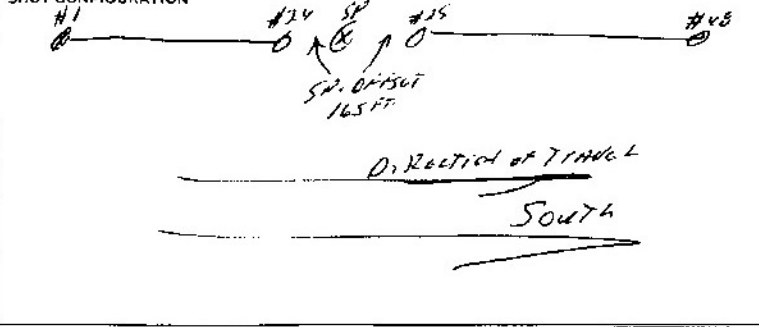

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB
 UPPER SET LIMIT 75 %
 LOWER SET LIMIT 25 %
 FORMAT TYPE:
 9 TRACK 21 TRACK
 GALVO LEVEL:
 1-24 15 DB AUX 15 DB
 OTHER:

MISCELLANEOUS INFORMATION: