


| IDENTIFICATION | | SHOT | | SPREAD | | TAPE | | GAIN | | | | | FILTERS | | REMARKS | | | | | | | | | | | | | | | | | | | | | |
|----------------|---------|-------------|-------------|-----------|-----------|------|------|----------|---------|------|-------------|------------|---------|--------------|-------------|------------|-------|----------------|---------------|---------------|------|---------|-----|------|-------|-------|-------|---------------|--------------|------------|----------------|---------------|-------|--|-----------------|----------------------|
| LINE | PROFILE | REEL NUMBER | FILE NUMBER | SHOT CAL. | PLAY BACK | TIME | SIZE | TOP BOT. | NO CAPS | CODE | S.P. OFFSET | NO. 1 DIR. | CODE | SEIS. OFFSET | SEIS. DEPTH | CDP SWITCH | SETUP | SAMPLE RATE MS | RECORD LENGTH | PARITY ERRORS | MODE | 1-47 24 | 5-8 | 9-12 | 13-18 | 17-20 | 21-24 | FINAL GAIN DB | RELEASE RATE | TRIP DELAY | HIGH CUT FREQ. | LOW CUT FREQ. | SLOPE | NOTCH IN OUT | REMARKS | |
| 69 | 24 | 52 | 56 | 12 | | | 110 | 95/105 | 2 | A | 165 | W | A | 6' | | 1/5 | 29 | X | 6 | | AGC | 60 | 59 | 48 | 42 | 36 | 30 | 92DB | Fast | 384 | 124 | 8 | 3628 | Daily tests No 43 test time break #55 to 54 | | |
| offset | 25 | 57 | 57 | 2 | | | 110 | 95/105 | | | | | | | | 1/9 | | | | | | | | | | | | | | | | | | offset 40' North | | |
| | 26 | 60 | 60 | 3 | | | 110 | 95/105 | | | | | | | | 1/13 | | | | | | | | | | | | | | | | | | | | |
| | 27 | 61 | 61 | 4 | | | 110 | 95/105 | | | | | | | | 1/17 | | | | | | | | | | | | | | | | | | | | |
| | 28 | 62 | 62 | 5 | | | 110 | 95/105 | | | | | | | | 1/21 | | | | | | | | | | | | | | | | | | | | |
| | 29 | 63 | 63 | 6 | | | 110 | 95/105 | | | | | | | | 1/25 | | | | | | | | | | | | | | | | | | | | |
| offset | 30 | 64 | 64 | 7 | | | 110 | 95/105 | | | | | | | | 1/29 | | | | | | | | | | | | | | | | | | | offset 80' west | |
| | 31 | 65 | 65 | 8 | | | 110 | 95/105 | | | | | | | | 1/33 | | | | | | | | | | | | | | | | | | | | |
| | 32 | 66 | 66 | 9 | | | 110 | 95/105 | | | | | | | | 1/37 | | | | | | | | | | | | | | | | | | | | |
| | 33 | 67 | 67 | 10 | | | 110 | 95/105 | | | | | | | | 1/41 | | | | | | | | | | | | | | | | | | | | |
| | 34 | 70 | 70 | 11 | | | 110 | 95/105 | | | | | | | | 1/45 | | | | | | | | | | | | | | | | | | | | |
| | 35 | 71 | 71 | 12 | | | 110 | 95/105 | | | | | | | | 1/49 | | | | | | | | | | | | | | | | | | | | moved new set up |
| | 36 | 72 | 72 | 13 | | | 110 | 95/105 | | | | | | | | 1/1 -42 | | | | | | | | | | | | | | | | | | | | |
| | 37 | 73 | 73 | 14 | | | 110 | 95/105 | | | | | | | | 1/2 | | | | | | | | | | | | | | | | | | | | |
| | 38 | 74 | 74 | 15 | | | 110 | 95/105 | | | | | | | | 1/9 | | | | | | | | | | | | | | | | | | | | |
| | 39 | 75 | 75 | 16 | | | 110 | 95/105 | | | | | | | | 1/13 | | | | | | | | | | | | | | | | | | | | |
| | 40 | 76 | 76 | 17 | | | 110 | 95/105 | | | | | | | | 1/17 | | | | | | | | | | | | | | | | | | | | Drillers on the line |
| | 41 | 77 | 77 | 18 | | | 110 | 95/105 | | | | | | | | 1/21 | | | | | | | | | | | | | | | | | | | | |
| | 42 | 100 | 100 | 19 | | | 110 | 95/105 | | | | | | | | 1/25 | | | | | | | | | | | | | | | | | | | | CAT on the line |
| | 43 | 101 | 101 | 20 | | | 110 | 95/105 | | | | | | | | 1/29 | | | | | | | | | | | | | | | | | | | | " |
| | 44 | 102 | 102 | 21 | | | 110 | 95/105 | | | | | | | | 1/33 | | | | | | | | | | | | | | | | | | | | " |
| | 45 | 103 | 103 | 22 | | | 110 | 95/105 | | | | | | | | 1/37 | | | | | | | | | | | | | | | | | | | | " |
| | 46 | 104 | 104 | 23 | | | 110 | 95/105 | | | | | | | | 1/41 | | | | | | | | | | | | | | | | | | | | " |
| | 47 | 105 | 105 | 23 | | | 110 | 95/105 | | | | | | | | 1/45 | | | | | | | | | | | | | | | | | | | | CAT on the line |
| | 48 | 106 | 106 | 24 | | | 110 | 95/105 | | | | | | | | 1/49 | | | | | | | | | | | | | | | | | | | | moved to next set up |
| | 49 | 107 | 107 | 25 | | | 110 | 95/105 | | | | | | | | 1/1 51 | | | | | | | | | | | | | | | | | | | new set up | |

| SEISMOMETER AND SPREAD INFORMATION | | | | | |
|------------------------------------|------------|---------|------|---------------|----------------|
| CODE | SEIS. TYPE | NO./GP. | INT. | GROUP PATTERN | SPREAD PATTERN |
| A | 12V | 12 | 40' | In line | 530' In line |

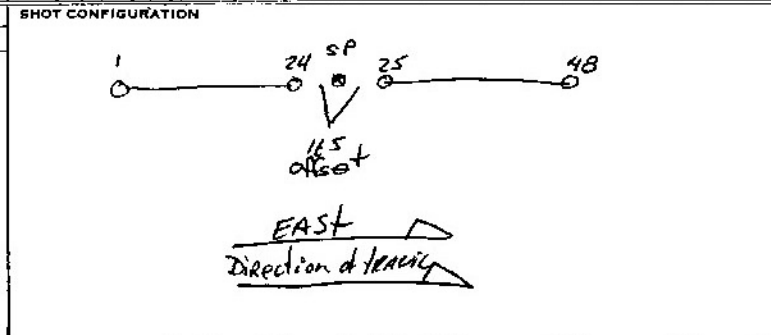

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB

UPPER SET LIMIT 75 %

LOWER SET LIMIT 25 %

FORMAT TYPE:

9 TRACK 21 TRACK

GALVO LEVEL:

1-24 15 DB AUX 15 DB

OTHER:

MISCELLANEOUS INFORMATION: