

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																							
U.S. NAVY		182	N.P.R. - 4		ALASKA	U.S.A.	702	8 ²⁰			5-6-75	F. Carlsenius	1093																							
LINE	PROFILE	IDENTIFICATION			TIME	SHOT			SPREAD					TAPE		GAIN						FILTERS		REMARKS												
		REEL NUMBER	FILE NUMBER	SHOT CAL		PLAY BACK	SIZE	TOP	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. SEIS. OFFSET	SEIS. DEPTH	COP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)					FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ	LOW CUT	NOTCH				
74	1	648 528	014	1	R/W	1X35	31/45	2		NE	10'	1	1	1	1	✓	6			OPERATE	66	66	66	60	54	42	90	Fast	640	124	B	36	OUT	Some cable cross-feed.		
	2		015	2		1X35	31/45	2		"	"				✓	"				"	42	54	60	66	66	66	"	"	"	"	"	"	"	"		
	3		016	3		1X35	31/45	2		"	"				✓	"				"	"	"	"	"	"	"	"	"	"	"	"	"	"	"		
	4		017	4		1X35	31/45	2		"	"				✓	"				"	"	"	"	"	"	"	"	"	"	"	"	"	"	"		
	5		020	5		1X35	31/45	2		"	"				✓	"				"	"	"	"	"	"	"	"	"	"	"	"	"	"	"		
	6		021	6		1X35	31/45	2		"	"				✓	"				"	"	"	"	"	"	"	"	"	"	"	"	"	"	"		
	7		022	7		1X35	31/45	2		"	"				✓	"				"	"	"	"	"	"	"	"	"	"	"	"	"	"	"		
	8		023	8		1X35	31/45	2		"	"				✓	"				"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
	9		024	9		1X35	31/45	2		"	"				✓	"				"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
	10		025	10		1X35	31/45	2		"	"				✓	"				"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
	11		026	11		1X15	9/15	2		"	"				✓	"				"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
	12		027	12		1X15	9/15	2		"	"				✓	"				"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
	13		030	13		3X10	6/10	6		"	"				✓	"				"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
	14		031	14		3X10	6/10	6		"	"				✓	"				"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	moved up to S.P. #20.
	15		32	15		1X35	31/45	2		"	"				✓	"				"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
	16		33	16		1X35	31/45	2		"	"				✓	"				"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
	17		34	17		1X35	31/45	2		"	"				✓	"				"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
	18		35	18		1X35	31/45	2		"	"				✓	"				"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
	19		36	19		1X35	31/45	2		"	"				✓	"				"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
	20		37	20		1X35	31/45	2		"	"				✓	"				"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
	21		40	21		1X35	31/45	2		"	"				✓	"				"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
	22		41	22		1X35	31/45	2		"	"				✓	"				"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
	23		42	23		1X35	31/45	2		"	"				✓	"				"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
	24		43	24		1X25	35/45	2		"	"				✓	"				"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
	25		44	25		1X35	31/45	2		"	"				✓	"				"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
	26		45	26		1X35	31/45	2		"	"				✓	"				"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"

SEISMOMETER AND SPREAD INFORMATION						SHOT CONFIGURATION		DFS III SYSTEM PARAMETERS:		MISCELLANEOUS INFORMATION:	
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN			GAIN CONSTANT	UPPER SET LIMIT	LOWER SET LIMIT
									30 DB	62.5 %	18 %
									FORMAT TYPE:	File # 001 = 10 seconds waves	
									<input type="checkbox"/> 9 TRACK <input checked="" type="checkbox"/> 21 TRACK	File # 002 - 011 = D.R.D.	
									GALVO LEVEL:	File # 012 = Pulse test	
									1-24 21 DB AUX 21 DB	File # 013 = test t.B.	
									OTHER:		

CLIENT: U.S. NAVY PARTY NO: 182 PROSPECT: N.P.R.1 COUNTY: STATE: COUNTRY: LEFT STORAGE: ARRIVED FIELD: LEFT FIELD: ARRIVED STORAGE: DATE: 5-6-75 OBSERVER: F. Gulsenius PAGE: 3 of 3

LINE	PROFILE	IDENTIFICATION			PLAY BACK	TIME	SHOT		NO CAPS	CODE	S.P. OFFSET	SPREAD				SETUP	TAPE			GAIN							FILTERS		NOTCH	REMARKS	
		REEL NUMBER	FILE NUMBER	SHOT CAL.			TOP	BOT.				NO. 1 DIR.	S.P. OFFSET	SEIS DEPTH	CDP SWITCH		SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)							FINAL GAIN DB			RELEASE RATE
74	53	529	100	53	R/W		1X35	31/45	2		NE	10'	1/1	5	✓	6	DIPATE	66	66	66	60	54	42	90	10st	769	124	8	36	Out.	#1 & #29 open. ^{bad calib} for #24
	54	101	54				1X35	31/45	2		"	"	1/5		✓	"	"	42	54	60	66	66	66	"	"	"	"	"	"	"	#25 open
	55	102	55				1X35	31/45	2		"	"	1/9		✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	#21 "
	56	103	56				1X35	31/45	2		"	"	1/13		✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	#17 "
	57	104	57				1X35	36/50	2		"	"	1/17		✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	#13 "
	58	105	58				1X35	36/50	2		"	"	1/21		✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	#9 "
	59	106	59				1X35	36/50	2		"	"	1/25		✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	#5 "
	60	107	60				1X35	60/72	2		"	"	1/29		✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	#1 "
	61	110	61				1X35	55/69	2		"	"	1/33		✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
	62	111	62				1X35	55/69	2		"	"	1/37		✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
	63	112	63				1X35	55/69	2		"	"	1/41		✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
	64	113	64				1X35	55/69	2		"	"	1/45		✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
	65	114	65				1X35	55/69	2		"	"	1/49		✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
	66	115	66				1X35	55/69	2		"	"	1/25	6	✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	Moved up to S.P. #66. Bottom Banks Reversed.
	67	116	67				1X35	55/69	2		"	"	1/29		✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
	68	117	68				1X35	55/69	2		"	"	1/33		✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	

SEISMOMETER AND SPREAD INFORMATION						SHOT CONFIGURATION				DFS III SYSTEM PARAMETERS:				MISCELLANEOUS INFORMATION:				
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN					GAIN CONSTANT _____ DB				NOTE: ON S.P. #66 - Bottom Banks Reversed at Base C.D.P. switch.			
											UPPER SET LIMIT _____ %							
											LOWER SET LIMIT _____ %							
											FORMAT TYPE:							
											<input type="checkbox"/> 9 TRACK <input type="checkbox"/> 21 TRACK							
											GALVO LEVEL:							
											1-24 _____ DB AUX _____ DB							
											OTHER:							

CLIENT
U.S. NAVY

PARTY NO. 182
PROSPECT

COUNTY

STATE

COUNTRY

LEFT STORAGE

ARRIVED FIELD

LEFT FIELD

ARRIVED STORAGE

DATE 5-6-75

OBSERVER F. Carlsen

LINE	PROFILE	IDENTIFICATION			TIME	SIZE	SHOT		NO. CAPS	CODE	S.P. OFFSET	SPREAD				TAPE				GAIN										FILTERS		REMARKS				
		REFL. NUMBER	FILE NUMBER	SHOT CAL			TOP	BOT				NO. 1 DIR.	CODE	S.P. OFFSET	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)										FINAL GAIN DB		RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT
74	27	698 528	46	27	R/W	1X35	31/45	2			NE	10	1	3	✓	6	0LEAP	66	66	66	60	54	42	90	East	728	124	8	36	out.	Cables very wet at T. outs.					
	28		47	28		1X35	31/45	2			"	"	1	5	✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"				
	29		50	29		1X35	31/45	2			"	"	1	9	✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"				
	30		51	30		1X35	31/45	2			"	"	1	13	✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"			
	31		52	31		1X35	31/45	2			"	"	1	17	✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"			
	32		53	32		1X35	31/45	2			"	"	1	21	✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	Very shallow #46 open. #42 open #45		
	33		54	33		1X35	31/45	2			"	"	1	25	✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"			
	34		55	34		2X10	11/15	4			"	"	1	29	✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	#41, #38 open.		
	35		56	35		1X35	31/45	2			"	"	1	33	✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"		
	36		57	36		1X35	31/45	2			"	"	1	37	✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"		
	37		60	37		1X35	31/45	2			"	"	1	41	✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"		
	38		61	38		1X35	31/45	2			"	"	1	45	✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"		
	39		62	39		1X35	31/45	2			"	"	1	49	✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	Moved up to S.P. #46.	
	40		63	40		1X35	31/45	2			"	"	1	4	✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"		
	41		64	41		1X35	31/45	2			"	"	1	5	✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"		
	42		65	42		1X35	31/45	2			"	"	1	9	✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
	43		66	43		1X35	31/45	2			"	"	1	13	✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	U.H. on gap #24 (water)	
	44		67	44		1X10	21/25	2			"	"	1	17	✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"		
	45		670	45		1X35	31/45	2			"	"	1	21	✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
	46		71	46		1X35	31/45	2			"	"	1	25	✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	Changed tape (698529)
	47	698 529	72	47		1X35	31/45	2			"	"	1	29	✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	Cable laying in water
	48		73	48		1X35	31/45	2			"	"	1	33	✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	By pressure ridge.
	49		74	49		1X35	31/45	2			"	"	1	37	✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
	50		75	50		1X35	31/45	2			"	"	1	41	✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
	51		76	51		1X35	31/45	2			"	"	1	45	✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
	52		77	52		1X35	31/45	2			"	"	1	49	✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	Moved up to S.P. #

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

SHOT CONFIGURATION

NO. 1 DIR.	CODE	S.P. OFFSET	CDP SWITCH	SETUP
NE	10		1	3
"	"		1	5
"	"		1	9
"	"		1	13
"	"		1	17
"	"		1	21
"	"		1	25
"	"		1	29
"	"		1	33
"	"		1	37
"	"		1	41
"	"		1	45
"	"		1	49

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT _____ DB
 UPPER SET LIMIT _____ %
 LOWER SET LIMIT _____ %
 FORMAT TYPE:
 9 TRACK 21 TRACK
 GALVO LEVEL:
 1-24 _____ DB AUX _____ DB
 OTHER:


MISCELLANEOUS INFORMATION:

CLIENT: U.S. NAVY PARTY NO: 182 PROSPECT: N.P.R. 4 COUNTY: STATE: ALASKA COUNTRY: U.S.A. LEFT STORAGE: 7⁰⁰ ARRIVED FIELD: 8⁰⁰ LEFT FIELD: 5⁰⁰ ARRIVED STORAGE: 6⁰⁰ DATE: 5-7-75 OBSERVER: F. Carlgenius PAGE: 109

LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	SPREAD				TAPE		GAIN					FILTERS			REMARKS						
								TOP	BOT.			S.P. OFFSET	NO. 1 DIR.	CODE	S.P. OFFSET	SEIS DIR. I	SEIS DIR. II	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)					MIN. GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.
												1	2	4	1-4/24	5-8	9-12	13-16	17-20	21-24				FREQ.	SLOPE	IN	OUT					
74	hole B	698	120	1		9 ⁰⁰	1X1	7 7 1/2	1							3	Manual						42	1		124	8	36	out	EXPERIMENTAL PROGRAM.		
	B		121	2			1X1	7 7 1/2	1														24									
	B		122	3			1X1	7 7 1/2	1														12									
	B		123	4			1X1	7 7 1/2	1														6									
	B		124	5			1X1	7 7 1/2	1														0									
	A	698	125	6			1X1	7 7 1/2	1														0								60's spacing 1-12 = pressure phones.	
	A	530	126	7			1X1	10 11	1														0								13-24 = 9/string group.	
	68C		127	8			1X10	7 7 1/2	2														0									
	68D		130	9			1X25	65 75	2														0									
	68E		131	10		1 ⁰⁰	1X50	55 75	2														0									
																																Pickup and layout Moved to Line #32.
32	75A	698	132	1	R/W	3 ⁰⁰	1X50	55 75	2		SE	10'	1	2	✓	6	OPERATE	60	60	54	54	42	90	Fast	76A	127	8	36	out	44gpp #24		
	236	530	002	2			1X50	55 75	2		165SE	10'	1	5	✓	"	"	42	54	54	60	60	"	"	"	"	"	"	"	"	Point offset 165'SE. file counter.	
	337		003	3		?	1X50	55 75	2			10'	1	9	✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
	438		004	4		?	1X50	55 75	2			"	1	13	✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
	539		005	5		?	1X50	55 75	2			"	1	17	✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
	640		006	6			1X35	45 55	2			"	1	21	✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
	741		007	7			1X35	45 55	2			"	1	25	✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
	841		008	8			1X35	45 55	2			"	1	29	✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	
	945		010	89			1X35	45 55	2			"	1	33	✓	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	Caught up to drill.

NO. 32

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	SPREAD PATTERN

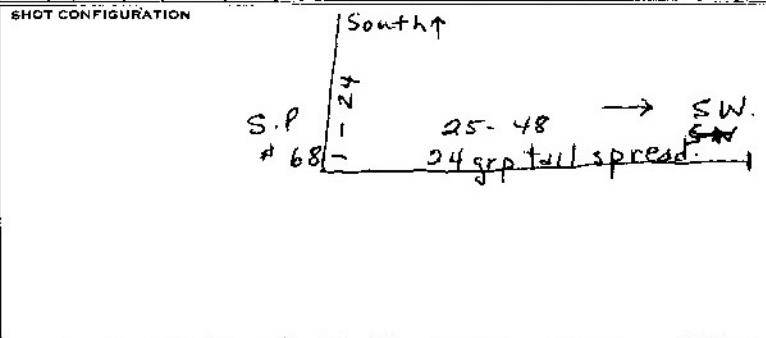

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT _____ DB

UPPER SET LIMIT _____ %

LOWER SET LIMIT _____ %

FORMAT TYPE:

9 TRACK 21 TRACK

GALVO LEVEL:

1-24 _____ DB AUX _____ DB

OTHER:

MISCELLANEOUS INFORMATION:

Traces 1 to 12 = 9/string grouped.

13 to 24 = Pressure phones

25 to 48 = Normal spread.

shots # 1-5 = 1-24 were 20'a part.

shots # 6 - = 1-24 were 60'a part.

