


CLIENT		PARTY NO	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																		
NAVY		1182	WPR-4		ALASKA		7:00	10:15	8:15	9:00 AM	2/26/76	Sherwood																			
LINE	PROFILE	IDENTIFICATION		SHOT CAL	PLAY BACK	TIME	SHOT		NO CAPS	CODE	S.P. OFFSET	NO. DIR	SPREAD		TAPE				MODE	GAIN						RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	FILTERS		REMARKS
		REEL NUMBER	FILE NUMBER				TOP	BOT					S.P. OFFSET	SEIS. DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH		PARITY ERRORS	1-4/24	5-8	9-12	13-16	17-20				21-24	FINAL GAIN DB	

SEISMOMETER AND SPREAD INFORMATION				
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN

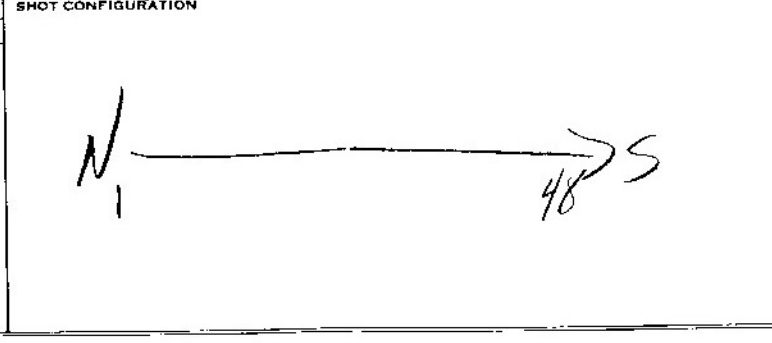

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB

UPPER SET LIMIT 62.5 %

LOWER SET LIMIT 18 %

FORMAT TYPE:

9 TRACK 21 TRACK

GALVO LEVEL:

1-24 24 DB AUX 21 DB

OTHER:

MISCELLANEOUS INFORMATION:

1526 Pulse test

1535 Pulse test

DAILY TESTS -

Legend show writings on Rig

Trace #48 Dead

Trace #42 Dead

Traces #45 +43 Dead

Trace #39 dead

Trace # 48 dead 47+46

Bad cable (Head)

Shooting track down

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																							
NAVY		182	NPR-4		ALASKA		7:00	7:30	8:30	9:00	2/27/76	R.H. Shearwood																								
IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN				FILTERS		REMARKS														
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL.	PLAY BACK	TIME	SIZE	TOP BOT	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	SEIS. TYPE	SEIS. OFFSET	SEIS. DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)						FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH IN OUT	
																							1-4	5-8	9-12	13-16	17-20	21-24					FREQ	SLOPE		

REMARKS
Daily Ints 1547 - 1561

Trace 42 Dead
Trace 43 Dead

Dummy premature shots no record.

(Radio Keyed)?

Hole blew.
Tape change.

SEISMOMETER AND SPREAD INFORMATION						SHOT CONFIGURATION	
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN	

DFS III SYSTEM PARAMETERS:	
GAIN CONSTANT	30 DB
UPPER SET LIMIT	62.5 %
LOWER SET LIMIT	18.1 %
FORMAT TYPE:	<input type="checkbox"/> 9 TRACK <input checked="" type="checkbox"/> 21 TRACK
GALVO LEVEL:	1-24 24 DB AUX 21 DB
OTHER:	

MISCELLANEOUS INFORMATION:	
1577	Pulse Int
1613	Pulse Int

CLIENT		PARTY NO	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																						
NAVY		1182	NPR-4		ALASKA							R.H. Sherwood																							
LINE	PROFILE	IDENTIFICATION		SHOT CAL	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	SPREAD		CDP SWITCH	SETUP	TAPE				MODE	GAIN						RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	FILTERS		REMARKS
		REEL NUMBER	FILE NUMBER					TOP	BOT						1	2			4	1-4/24	5-8	9-12		13-16	17-20	21-24	FINAL GAIN DB	FREQ.	SLOPE				IN	OUT	

SEISMOMETER AND SPREAD INFORMATION						SHOT CONFIGURATION		DFS III SYSTEM PARAMETERS:		MISCELLANEOUS INFORMATION:		
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN						
									GAIN CONSTANT	30	DB	
									UPPER SET LIMIT	62.5	%	
									LOWER SET LIMIT	18	%	
									FORMAT TYPE:			
									<input type="checkbox"/> 9 TRACK	<input checked="" type="checkbox"/> 15/21 TRACK		
									GALVO LEVEL:			
									1-24	24	DB AUX 21	DB
									OTHER:			

Trace #43 Good
Trace #39 " "

Ray out caught Rigs

End of day.

1626 Pulse

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																					
NAVY		1182	NPR-4		ALASKA		7:00	7:30			2/29/76	R. H. Greenwood																						
LINE	PROFILE	IDENTIFICATION		SHOT CAL.	PLAY BACK	TIME	SIZE	SHOT		NO. CAPS	CODE U.	S.P. OFFSET	NO. DIR.	SPREAD		SEIS. OFFSET	SEIS. DIST.	COP SWITCH	SETUP	TAPE				MODE	GAIN						FILTERS		NOTCH IN/OUT	REMARKS
		REEL NUMBER	FILE NUMBER					TOP	BOT.					RECORD LENGTH	PARITY ERRORS					INITIAL GAIN (DB)						FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	FREQ.	SLOPE			
1-4/24	5-8	9-12	13-16	17-20	21-24	1	2	4	1	2	3	4	1	2	3	4	1	2	3	4	1	2	3	4	1	2	3	4	1	2				

dummy

Dead caps

Hole blew

Hole blew

*Trace # 21 dead
Trace # 17 dead
Trace # 13 dead
Trace # 9 dead
Trace # 5 dead
Trace # 1 dead*

SEISMOMETER AND SPREAD INFORMATION					SHOT CONFIGURATION	
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

DFS III SYSTEM PARAMETERS:	
GAIN CONSTANT	30 DB
UPPER SET LIMIT	62.5 %
LOWER SET LIMIT	18 %
FORMAT TYPE:	<input type="checkbox"/> 9 TRACK <input checked="" type="checkbox"/> TRACK
GALVO LEVEL:	1-24 24 DB AUX 21 DB
OTHER:	

MISCELLANEOUS INFORMATION:
*1673 Pulse test
1706 Pulse test*

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																			
DANVY		1182	NPR-4		ALASKA						2/28/76	R.H. Macwood																				
LINE	PROFILE	IDENTIFICATION		SHOT CAL.	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	SPREAD				SETUP	TAPE			MODE	GAIN					FILTERS		NOTCH IN/OUT	REMARKS
		REEL NUMBER	FILE NUMBER					TOP	BOT.						SEIS. OFFSET	SEIS. DEPTH	CDP SWITCH	SAMPLE RATE MS		RECORD LENGTH	PARITY ERRORS	INITIAL GAIN (DB)		FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT FREQ.	SLOPE			

SEISMOMETER AND SPREAD INFORMATION						
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

SHOT CONFIGURATION	

DFS III SYSTEM PARAMETERS:
 GAIN CONSTANT 30 DB
 UPPER SET LIMIT 62.5 %
 LOWER SET LIMIT 18 %
 FORMAT TYPE:
 9 TRACK 21 TRACK
 GALVO LEVEL:
 1-24 24 DB AUX 21 DB
 OTHER:


MISCELLANEOUS INFORMATION:

Trace # 45 dead
 Trace # 41 dead

ITB

still working layout
 and pickup crew

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																							
NAVY		1182	NPR-4		Alaska	USA	7:00	7:30			2/29/76	R. Sherwood / A. Lass	1 of																							
IDENTIFICATION				SHOT			SPREAD				TAPE				GAIN				FILTERS		REMARKS															
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL.	PLAY BACK	TIME	SIZE	TOP BOT.	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S. S. OFFSET	DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)				FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	FREQ.	SLOPE	NOTCH IN/OUT	REMARKS			
120	109	543508	1747	A	RAW	8:40	50	55/75	2			N		5'	1/1	✓	✓	6			OPR	54	54	54	48	42	36	90	FAST	608	124	8	36	OUT	Rec 1746 Pulse TEST	
	110		1750			8:50	50	55/75	2																											
	111		1751			9:00	50	55/75	2																											
	112		1752			9:20	50	55/75	2																											
	113		1753			9:30	50	55/75	2																											
	114		1754			9:40	50	55/75	2																											
	115		1755			9:50	50	55/75	2																											
	116		1756			10:05	50	55/75	2																											
	117		1757			10:30	50	55/75	2																										25 #49 to 36 wrong CDP.	
	118		1760			10:40	50	55/75	2																											
	119		1761			10:50	50	55/75	2																											
	120		1762			11:00	50	55/75	2																											
	121		1763			11:10	50	55/75	2																											
	122		1765			12:30	50	55/75	2																											
	123		1766			12:40	50	55/75	2																											
	124		1767			12:50	50	55/75	2																											
	125		1770			1:00	50	55/75	2																											
	126		1771			1:10	50	55/75	2																											
	127		1772			1:20	50	55/75	2																											
	128		1773			1:30	50	55/75	2																											
	129		1774			1:40	50	55/75	7																											
	130		1775			1:50	50	55/75	2																											
	131		1776			2:00	50	55/75	2																											
	132		1777			2:10	50	55/75	2																											
	133		2000			2:30	50	55/75	2																											
	134		2002			3:45	50	55/75	2																											
	135		2003			3:55	50	55/75	2																											
	136		2004			4:05	50	55/75	2																											



25 #49 to 36 wrong CDP.

Trace #49 dead

Three cable drag out.

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	SPREAD PATTERN
0	20 D 10 H2	18	25'	In line	330 48 TRACE SPLIT. NO GAP

SHOT CONFIGURATION	
NO. 1 DIR.	N
SPREAD	5'
DEPTH	1/1
SETUP	✓
RECORD LENGTH	6
PARITY ERRORS	
MODE	OPR
INITIAL GAIN (DB)	54 54 54 48 42 36 90
FINAL GAIN DB	36 42 48 54 54 54
RELEASE RATE	FAST
TRIP DELAY	608
HIGH CUT FREQ.	124
FREQ.	8
SLOPE	36
NOTCH IN/OUT	OUT

DFS III SYSTEM PARAMETERS:	
GAIN CONSTANT	30 DB
UPPER SET LIMIT	62.5 %
LOWER SET LIMIT	18 %
FORMAT TYPE:	<input type="checkbox"/> 9 TRACK <input checked="" type="checkbox"/> 21 TRACK
GALVO LEVEL:	1-24 24 DB AUX 21 DB
OTHER:	

MISCELLANEOUS INFORMATION:	
1764 Pulse	
2001 Pulse	

CLIENT		PARTY NO		PROSPECT		COUNTY		STATE		COUNTRY		LEFT STORAGE		ARRIVED FIELD		LEFT FIELD		ARRIVED STORAGE		DATE		OBSERVER		PAGE												
DINWY		1182		MPP-4				ALASKA												2/29/46																
LINE	PROFILE	IDENTIFICATION		SHOT CAL	PLAY BACK	TIME	SIZE	SHOT		SPREAD					TAPE		GAIN						FILTERS		REMARKS											
		REEL NUMBER	FILE NUMBER					NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.E. OFFSET	SE. DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)						FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH			
120	137	543508	2005		RAW	4:15	50	55/75	2		75'E	N					1/13	3		6	AGC	54	54	54	48	42	36	90	FMSY	60P	124	8	36	OUT		
	138		2006			4:25	50	55/75	2								1/17					36	42	48	54	54	54									
	139	543509	2007			4:35	50	55/75	2								1/21																			
	140		2010			4:45	50	55/75	2								1/25																			
	141		2011			4:55	50	55/75	2								1/29																			
	142		2012			5:05	50	55/75	2								1/33																			
	143		2013			5:10	50	55/75	2								1/37																			
	144		2014			5:20	50	55/75	2								1/41																			
	145		2015			5:30	50	55/75	2		50' N	✓					1/45																			
	146		2014			6:00	50	55/75	2								1/49																			
	147		2017			6:30	50	55/75	2								1/21	4																		
	148		2020			6:35	50	55/75	2		50' N	✓					1/25																			caught up to Rege

SEISMOMETER AND SPREAD INFORMATION						SHOT CONFIGURATION		DPS III SYSTEM PARAMETERS:		MISCELLANEOUS INFORMATION:		
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN						
									GAIN CONSTANT	30	DB	
									UPPER SET LIMIT	62.5	%	
									LOWER SET LIMIT	18	%	
									FORMAT TYPE:			
									<input type="checkbox"/> 9 TRACK	<input checked="" type="checkbox"/> 21 TRACK		
									GALVO LEVEL:			
									1-24	24	DB	
									AUX	24	DB	
									OTHER:			

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																											
NAVY		1182	NPM-4		PALAU		7:00	7:30	7:20	14:00	3/1/76	R.B. Sherwood																												
IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN				FILTERS		REMARKS																		
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL.	PLAY BACK	TIME	SIZE	TOP BOT.	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. SEIS. OFFSET	SEIS. DEPTH	CDD SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)					FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	FREQ.	SLOPE	NOTCH IN	OUT						
120	149	543509	2034		R.M.W.	8:35	50	55/75	2			W				1/5	1	1	6			MGC	54	54	54	48	42	36	90	FIRST	608	124	8	36	OUT	Daily sets 2021-2033				
	150		2035			8:40	50	55/75	2							1/9							36	42	48	54	54													
	151		2036			8:50	50	55/75	2							1/13																								
	152		2037			9:00	50	55/75	2							1/17																								
	153		2040			9:10	50	55/75	2							1/21																								
	154		2041			9:20	50	55/75	2							1/25																								
	155		2042			9:30	50	55/75	2							1/29																								
	156		2043			9:40	50	55/75	2							1/33																								
	157		2044			9:50	50	55/75	2							1/37																								
	158		2045			10:00	50	55/75	2							1/41																								
	159		2046			10:10	50	55/75	2							1/45																								
	160		2047			10:20	50	55/75	2							1/49																								
	161		2051			11:50	50	55/75	2							1/1	2																							
	162		2052			12:00	55	67/75	2							1/5																								
	163		2053			12:10	50	55/75	2							1/9																								
	164		2054			12:20	50	55/75	2							1/13																								
	165		2055			12:40	55	67/75	2							1/17																								
	166		2056			12:50	50	55/75	2							1/21																								
	167		2057			1:00	50	55/75	2							1/25																								
	168		2060			1:10	55	67/75	2							1/29																								
	169		2061			1:20	50	55/75	2							1/33																								
	170	A	2062			2:05	50	55/75	2							1/37																								
EXP	170	B	2063			2:10	100	35/75	2							1/37																								
EXP	170	C	2064			2:15	100	50/90	2							1/37																								
EXP	170	D	2065			2:20	100	65/105	2							1/37																								
EXP	170	E	2066			2:35	15	84/90	2							1/37																								
EXP	170	F	2067			2:40	50	40/90	2							1/37																								
EXP	170	G	2070			2:45	55	82/90	2							1/37																								

Waiting on Rig

Partial hole 50 lbs + 5 gal.

Waiting on Rig
Partial hole 50 lbs + 5 gal.

Partial - 50 lbs + 5 gal

Waiting on Rig.

EXP 170 A-G

250 lbs
94 caps

SEISMOMETER AND SPREAD INFORMATION						SHOT CONFIGURATION		DFS III SYSTEM PARAMETERS:		MISCELLANEOUS INFORMATION:	
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.						

GAIN CONSTANT 30 DB
 UPPER SET LIMIT 62.5 %
 LOWER SET LIMIT 18 %
 FORMAT TYPE:
 9 TRACK 21 TRACK
 GALVO LEVEL:
 1-24 24 DB AUX 21 DB
 OTHER:

2090 Pulse Int.

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																											
WAVY		1182	NPR4		ALASKA						3/1/76	R.A. Sherwood																												
LINE	PROFILE	IDENTIFICATION		SHOT CAL	PLAY BACK	TIME	SHOT		NO CAPS	CODE	SP OFFSET	NO. DIR.	CODE	SPREAD		CDP SWITCH	SETUP	TAPE			GAIN						FILTERS		REMARKS											
		REEL NUMBER	FILE NUMBER				TOP	BOT						SEIS OFFSET	SEIS DEPTH			SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)						FINAL GAIN DB		RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH					
																		1-4	5-8	9-12	13-16	17-20	21-24																	
120	120	54350	2071	#		2:50	100	104/105	2		100'N	N				1/37	2	✓	6	AGC	54	54	54	48	42	36	90	FIRST	640	124	8	36	CUT	unable to shoot this charge (shorted caps)						
	171		2071			2:55	50	55/75	2			N				1/41																								
	172		2072			3:05	50	55/75	2							1/45																								
	173		2073			3:15	50	55/75	2							1/49																								
	174		2074			4:35	50	55/75	2							1/5	3																							
	175		2075			4:45	50	55/75	2							1/9																								
	176		2077			4:55	50	55/75	2		100'E					1/13																								
	177		2100			5:05	50	55/75	2							1/17																								
	178		2101			5:15	50	55/75	2							1/21																								
	179	543510	2102			5:30	50	55/75	2							1/25																								
	180		2103			5:40	50	55/75	2							1/29																								
	181		2104			5:50	50	55/75	2		400'W					1/37																								
	182		2105			6:05	50	55/75	2							1/37																								
	183		2106			6:15	50	55/75	2							1/41																								
	184		2107			6:25	50	55/75	2							1/45																								
	185		2110			6:35	50	55/75	2							1/49																								
	186		2111			6:50	50	55/75	2							1/41	4																							
	187		2112			7:00	50	55/75	2							1/45																								
	188		2113			7:10	55	68/75	2							1/49																								

SEISMOMETER AND SPREAD INFORMATION						
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

SHOT CONFIGURATION	

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB

UPPER SET LIMIT 2.5 %

LOWER SET LIMIT 18 %

FORMAT TYPE:

9 TRACK TRACK

GALVO LEVEL:

1-24 24 DB AUX 21 DB

OTHER:

MISCELLANEOUS INFORMATION:

2074 Pulse.

RECORDER FIELD DATA TI-13230-A

CLIENT		PARTY NO	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																								
NAVY		1182	NPR-4		ALASKA		7:00	7:30		10:30	2/2/75	<i>R. A. W.</i>																									
LINE	IDENTIFICATION		SHOT	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	SP OFFSET	NO. 1 DIR.	CODE	SPREAD			CDP SWITCH	SETUP	TAPE				MODE	GAIN						RELEASE RATE	TRIP DELAY	FILTERS			REMARKS		
	PROFILE	REEL NUMBER					FILE NUMBER	TOP						BOT.	SEIS OFFSET	SEIS DEPTH			SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	INITIAL GAIN (DB)		FINAL GAIN DB	HIGH CUT FREQ.	LOW CUT	NOTCH										
170	189	543510	2125	R.A.W	9:30	50	55/75	2			N				1/5	1	✓	6	AGC	54	54	54	48	42	36	90	FAST	140	124	8	36	OUT	gables + surge transparency Borehole 2 1/2 hrs lost				
	190		2126		9:40	50	50/70	2							1/9																						
	191		2127		9:50	50	55/75	2							1/13																						
	192		2130		10:00	50	55/75	2							1/17																						
	193		2131		10:10	50	55/75	2							1/21																						
	194		2132		10:20	25	65/75	2							1/25																						
	195		2133		10:30	25	65/75	2							1/29																						
	196		2134		10:40	25	65/75	2							1/33																						
	197		2135		10:50	25	65/75	2							1/37																						
	198		2136		11:00	25	65/75	2							1/41																						
	199		2137		11:10	25	65/75	2							1/45																						
	200		2141		12:10	25	65/75	2							1/5	2																				hole blue	
	201		2142		12:20	25	65/75	2							1/9	1/8																					
	202		2143		12:30	25	65/75	2							1/13																						
	203		2144		12:40	25	65/75	2							1/17																						
	204		2145		12:50	25	65/75	2							1/21																						
	205		2146		1:00	25	65/75	2							1/25																						
	206		2147		1:10	25	65/75	2							1/29																						
	207		2150		1:20	25	65/75	2							1/33																						
	208		2152		1:45	25	65/75	2							1/5	3																					
	209		2153		1:55	25	65/75	2							1/9																						
	210		2154		2:05	25	70/40	2							1/13																						
	211		2155		2:15	25	65/75	2							1/17																						
	212		2156		2:30	25	65/75	2							1/21																						
	213		2157		2:40	25	65/75	2							1/25																						
	214		2160		2:50	25	65/75	2							1/29																						
	215		2161		3:00	25	65/75	2							1/33																						
	216		2162		3:35	25	65/75	2							1/5	4																					

SEISMOMETER AND SPREAD INFORMATION					SHOT CONFIGURATION	
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

DFS III SYSTEM PARAMETERS:		MISCELLANEOUS INFORMATION:	
GAIN CONSTANT	30 DB	2140	Pulse
UPPER SET LIMIT	62.5 %	2151	Pulse
LOWER SET LIMIT	18 %	2162	Pulse
FORMAT TYPE:	<input type="checkbox"/> 9 TRACK <input checked="" type="checkbox"/> 21 TRACK		
GALVO LEVEL:	1-24 DB AUX 21 DB		
OTHER:			

CDP WRONG

LINE	PROFILE	IDENTIFICATION		SHOT CAL	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	SPREAD			TAPE			GAIN								FILTERS			REMARKS										
		REEL NUMBER	FILE NUMBER					TOP	BOT						S.D.	S.E.	S.D.	S.E.	DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)								FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH IN/OUT		
																1	2	4	1-47 24	5-8	9-12	13-16	17-20	21-24						FREQ.	SLOPE											
120	217	543510	2164		RAW	3:45	25	65/75	2				TV				1/9	4	0	C	AGC	60	60	60	60	60	60	60	60	60	60	60	60	90	FMT	640	124	8	36	OUT		
	218		2165			3:55	25	65/75	2								1/13					42	48	54	60	60	60															
	219		2166			4:10	25	65/75	2								1/17																									
	220		2167			4:20	25	65/75	2								1/21																									
	221		2170			4:30	25	65/75	2								1/25																									
	222		2171			4:40	25	65/75	2								1/29																									
	223	543511	2174			4:50	25	65/75	2								1/33																									
	224		2175			5:30	25	65/75	2								1/35																									
	225		2176			5:40	25	65/75	2								1/37																									
	226		2177			5:50	25	65/75	2								1/41																									
	227		2200			6:00	25	65/75	2								1/45																									
	228		2201			6:10	25	65/75	2								1/49																									
	229		2202			6:20	25	65/75	2								1/53																									
	230		2203			6:30	25	65/75	2								1/57																									
	231		2204			6:40	25	65/75	2								1/61																									
	232		2205			6:50	25	65/75	2								1/65																									
	233		2206			7:00	25	65/75	2								1/69																									
	234		2207			7:20	25	65/75	2								1/75																									

Wrong CDP.
Hole blew
Hole blew
Hole blew
Hole blew
Hole blew
Hole blew
Hole blew
Hole blew
20 gr tail spread only
hole blew due to deep snow
Wind 15 MPH.
End of line
Pick up spread return
to camp.

SEISMOMETER AND SPREAD INFORMATION						
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

SHOT CONFIGURATION	

DFS III SYSTEM PARAMETERS:
GAIN CONSTANT 30 DB
UPPER SET LIMIT 62.5 %
LOWER SET LIMIT 18 %
FORMAT TYPE:
 9 TRACK 21 TRACK
GALVO LEVEL:
1-24 24 DB AUX 24 DB
OTHER:

MISCELLANEOUS INFORMATION:
2172 G MC all ones
2173 C MC all ones
Pick up ALL SPREAD.
WANTNER GETTING BAD.