


CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																							
U.S. NAVY		1186	NPR 4	MOCK SCOP	ALASKA	USA	700	830			3-22-76	L. H. West	1 of 2																							
LINE	PROFILE	IDENTIFICATION		SHOT CAL	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	SPREAD				S.D. OFFSET	L.E. DIST	I. DIST	TAPE		MODE	GAIN						RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	FILTERS		NOTCH IN/OUT	REMARKS
		REEL NUMBER	FILE NUMBER					TOP	BOT					1	2	4	RECORD LENGTH				PARITY ERRORS	INITIAL GAIN (DB)		FINAL GAIN DB	FREQ	SLOPE										

SEISMOMETER AND SPREAD INFORMATION						
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

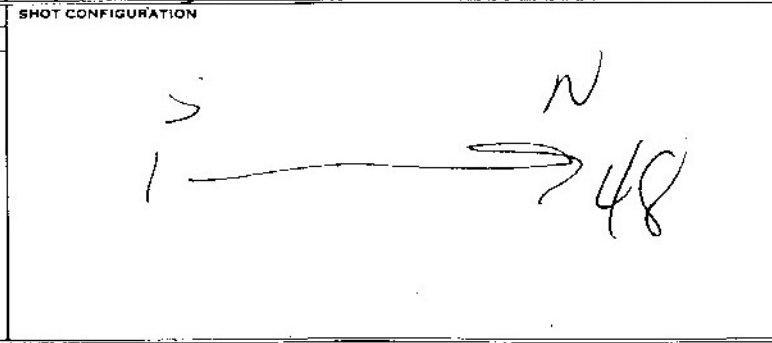

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB

UPPER SET LIMIT 62.5 %

LOWER SET LIMIT 18 %

FORMAT TYPE:

9 TRACK 21 TRACK

GALVO LEVEL:

1.48 DB AUX 15 DB

OTHER:

MISCELLANEOUS INFORMATION:

tests record no. 1-4

Pulse test record no. 5

Hole Brew waiting on Drills

Dead trace no 46

Move up to Six Jug Camp on Line

waiting for snow bridge trace no 21 Dead

CABLE Delay

640

576

trace no 45 Dead

CLIENT		PARTY NO		PROSPECT		COUNTY		STATE		COUNTRY		LEFT STORAGE		ARRIVED FIELD		LEFT FIELD		ARRIVED STORAGE		DATE		OBSERVER		PAGE													
45 NANA		1186		NPR 4		North Slope		ALASKA		USA		700		8:30		7:45				3-22-76		Hobert		2 of 2													
IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN				FILTERS				REMARKS													
LINE	PROFILE	REEL NUMBER	FILE NUMBER	CAL.	PLAY BACK	TIME	SIZE	TOP BOT.	NO CAPS	CODE	S.P. OFFSET	NO. DIR.	CODE	S.E. OFFSET	S.E. DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)						FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH			
																						1-4 24	5-8		9-12	13-16 7-20 21-24	FREQ.					SLOPE	IN	OUT			
122	158	67263	42	29 ^A	RAW	6:35	100	75/90	2			5		10'		1/5	7	✓	650		AGC	48 48	48 42	48 30	48 18	48 48	48 90	Fast	576	124	8	36	out	CATs on line " " " "			
	159		43	30 ^A		6:45	100	75/90	2							1/4																					
	160		44	31 ^A		7:00	100	75/90	2							1/3																					
	161		45	32 ^A		7:10	100	75/90	2							1/4	↓																				
	162		46	33 ^A		7:20	100	75/90	2							1/21	*											544									
	163		47	34 ^A		7:30	100	75/90	2							1/34											576										
	164		50	35 ^A		7:35	100	75/90	2							1/29						48 48	48 30	48 42	48 18	48 48	48 90										
	165		51	36 ^A		7:40	100	75/90	2							1/33						48 48	48 30	48 42	48 18	48 48	48 90										last shot of day

SEISMOMETER AND SPREAD INFORMATION						
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

SHOT CONFIGURATION	

DFS III SYSTEM PARAMETERS:
 GAIN CONSTANT 30 DB
 UPPER SET LIMIT 62.5 %
 LOWER SET LIMIT 18 %
 FORMAT TYPE:
 9 TRACK 21 TRACK
 GALVO LEVEL:
148 DB AUX 15 DB
 OTHER:

MISCELLANEOUS INFORMATION:

CLIENT		PARTY NO	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																								
US Navy		1186	NPR 4	North Slope	Alaska	USA	7	7:30		9:30	3 23 76	Cruse	1 of 2																								
LINE	PROFILE	IDENTIFICATION		SHOT CAL	PLAY BACK	TIME	SHOT		NO CAPS	CODE	S.P. OFFSET	SPREAD		NO. 1 DIR.	CODE	SEIS. OFFSET	SEIS. DEPTH	CDP SWITCH	SETUP	TAPE				MODE	GAIN						RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	FILTERS		NOTCH IN/OUT	REMARKS
		REEL NUMBER	FILE NUMBER				TOP	BOT.				SEIS. LENGTH	PARITY ERRORS							1-4/24	5-8	9-12	13-16		17-20	21-24	FINAL GAIN DB	FREQ.	SLOPE								

SEISMOMETER AND SPREAD INFORMATION						
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

SHOT CONFIGURATION	

DFS III SYSTEM PARAMETERS:
GAIN CONSTANT <u>30</u> DB
UPPER SET LIMIT <u>62.5</u> %
LOWER SET LIMIT <u>18</u> %
FORMAT TYPE:
<input type="checkbox"/> 9 TRACK <input checked="" type="checkbox"/> 21 TRACK
GALVO LEVEL:
<u>1-18</u> DB AUX <u>15</u> DB
OTHER:

MISCELLANEOUS INFORMATION:

pulse test record no 64
tests no. #52-63

moved to Pic Jung

trace no. 17 Dead

trace no. 5 Dead

tape change

trace no 46. Dead

CABLE DELAY

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																								
US NAVY		1186	APR 4	metz slope	Alaska	USA	7	730	800	9:30	3-23-76	L. J. S. et	2 of 2																								
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL.	PLAY BACK	TIME	SIZE	SHOT		NO. CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	SPREAD		CDP SWITCH	SETUP	TAPE		MODE	GAIN						FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	FILTERS		REMARKS			
								TOP BOT.	SPREAD						RECORD LENGTH	PARITY ERRORS			INITIAL GAIN (DB)						FREQ	SLOPE	IN					OUT					
																								1-4/24	5-8	9-12	13-18	19-20	21-24								

SEISMOMETER AND SPREAD INFORMATION						
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

SHOT CONFIGURATION	

DFS III SYSTEM PARAMETERS:
 GAIN CONSTANT 30 DB
 UPPER SET LIMIT 62.5 %
 LOWER SET LIMIT 18 %
 FORMAT TYPE:
 9 TRACK 21 TRACK
 GALVO LEVEL:
 1-~~18~~ 18 DB AUX 15 DB
 OTHER:

MISCELLANEOUS INFORMATION:

(last shot of day)

CLIENT		PARTY NO.		PROSPECT		COUNTY		STATE		COUNTRY		LEFT STORAGE		ARRIVED FIELD		LEFT FIELD		ARRIVED STORAGE		DATE		OBSERVER		PAGE																	
US NAVY		1186		NPR-1		North Slope		Alaska		USA		7		7 30				3-24-76		L. J. J. J.		1 of 2																			
LINE	IDENTIFICATION				SHOT CAL.	PLAY BACK	TIME	SIZE	SHOT		NO. CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	SPREAD				TAPE				GAIN						FILTERS		REMARKS									
	PROFILE	REEL NUMBER	FILE NUMBER	FILE NUMBER					TOP	BOT.						S.P. OFFSET	DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	1-47 24	5-8	9-12	13-16	17-20	21-24	FINAL GAIN DB	RELEASE RATE		TRIP DELAY	HIGH CUT FREQ.	LOW CUT FREQ.	SLOPE	NOTCH IN/OUT				
122	218	672636	156	156	1 ^A	RAW	7:40	50	75/90	2			S			10'	1/8	1	X	6sec	AGF	51 48	54 42	48 30	50 48	42 54	48 54	90	Fast	577	124	8	36	out	tests Record no. 151-154 Pause test 155						
	219		157	157	2 ^A		7:45	50	75/90	2							1/8																								
	220		160	160	3 ^A	DPS RAW	7:55	50	75/90	2							1/13																								
	221	172631	161	161	4 ^A	RAW	8:25	50	75/90	2							1/14																								
	222		162	162	5 ^A		8:30	50	75/90	2							1/21																								
	223		163	163	6 ^A		8:45	50	75/90	2							1/2																								
	224		164	164	7 ^A		9:00	50	75/90	2							1/2																								
	225		165	165	8 ^A		9:05	50	75/90	2							1/10																								
	226		166	166	9 ^A		10:30	50	75/90	2							1/8																								
	227		167	167	10 ^A		10:40	50	75/90	2							1/8																								
	228		170	170	11 ^A		10:50	50	75/90	2							1/13																								
	229		171	171	12 ^A		11:00	50	75/90	2							1/17																								
	230		172	172	13 ^A		11:10	50	75/90	2			500'				1/21																								
	231		173	173	14 ^A		11:20	50	75/90	2							1/25																								
	232		174	174	15 ^A		11:30	50	75/90	2							1/20																								
	233		175	175	16 ^A		11:35	50	75/90	2							1/33																								
	234		176	176	17 ^A		12:15	50	75/90	2							1/2																								
	235		177	177	18 ^A		12:25	50	75/90	2							1/2																								
	236		200	200	19 ^A		12:35	50	75/90	2							1/4																								
	237		201	201	20 ^A	RAW DPS	1:00	50	75/90	2							1/50																								
	238		202	202	21 ^A	RAW	1:10	50	75/90	2							1/8																								
	239		203	203	22 ^A		1:20	50	75/90	2							1/13																								
	240		204	204	23 ^A		1:25	50	75/90	2							1/17																								
	241		205	205	24 ^A		1:30	50	75/90	2							1/21																								
	242		206	206	25 ^A		2:00	50	75/90	2							1/8																								
	243		207	207	26 ^A		2:20	50	75/90	2							1/9																								
	244		210	210	27 ^A		2:30	50	75/90	2							1/13																								
	245		211	211	28 ^A		3:35	50	75/90	2							1/17																								

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.

SHOT CONFIGURATION	

DFS III SYSTEM PARAMETERS:	MISCELLANEOUS INFORMATION:
GAIN CONSTANT <u>30</u> DB	
UPPER SET LIMIT <u>62.5</u> %	
LOWER SET LIMIT <u>18</u> %	
FORMAT TYPE:	
<input type="checkbox"/> 9 TRACK <input checked="" type="checkbox"/> 21 TRACK	
GALVO LEVEL:	
1-48 18 DB AUX <u>15</u> DB	
OTHER:	

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																			
US NAVY		166	NPRU	North Slope	ALASKA	USA	7	7:30	8:00		3-24-76	Loibert	2 of 2																			
LINE	PROFILE	IDENTIFICATION		SHOT CAL	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	S.P. OFFSET	SPREAD		NO. 1 DIR.	CODE	S.P. SEIS. OFFSET	SEIS. DEPTH	CDP SWITCH	SETUP	TAPE			GAIN						FILTERS		REMARKS
		REEL NUMBER	FILE NUMBER					TOP	BOT.				SAMPLE RATE MS	RECORD LENGTH							PARITY ERRORS	MODE	1-4/24	5-8	9-12	13-16	17-20	21-24	FINAL GAIN DB	RELEASE RATE	TRIP DELAY	

SEISMOMETER AND SPREAD INFORMATION						
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

SHOT CONFIGURATION	

DFS III SYSTEM PARAMETERS:
 GAIN CONSTANT 30 DB
 UPPER SET LIMIT 62.5 %
 LOWER SET LIMIT 18 %
 FORMAT TYPE:
 9 TRACK 21 TRACK
 GALVO LEVEL:
 1-48 18 DB AUX 15 DB
 OTHER:

MISCELLANEOUS INFORMATION:
 tape chance
 (tape label says this starts @ 271 but records agree w/ 272)
 last shot of Day

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																										
US NAVY		1186	NPR 4	rock slope	ALASKA	USA	700	730			2 25 76	Crouse	1 of 2																										
IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN				FILTERS		REMARKS																	
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL	PLAY BACK	TIME	SIZE	TOP BOT.	NO CAPS	CODE	SP. OFFSET	NO. DIR.	CODE	SEIS. OFFSET	SEIS. DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE		INITIAL GAIN (DB)					FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ	LOW CUT		NOTCH					
																			1 2 4				1-24	5-8	9-12	13-16	17-20	21-24				FREQ.	SLOPE	IN	OUT				
122	274	672638	261	1 ^A	RAW	8:00	50	60/75	2			S		10'		1/2	1	X	6sec		Agc	54	54	48	48	42	48	48	90	Fast	277	124	8	36	out	+traces 1-4 Dead			
	275		262	2 ^A		8:05	50	60/75	2							1/4																							
	276		263	3 ^A		8:10	50	60/75	2							1/3																							
	277		264	4 ^A		8:15	50	60/75	2							1/7																							
	278		265	5 ^A		8:20	50	60/75	2							1/21																							
	279		266	6 ^A		8:55	50	60/75	2							1/25																							
	280		267	7 ^A		9:30	50	60/75	2							1/29																							
	281		268	8 ^A		10:30	50	60/75	2							1/2																							
	282		271	9 ^A		10:35	50	60/75	2							1/4																							
	283		272	10 ^A		10:45	50	60/75	2							1/9																							
	284		273	11 ^A		10:50	50	60/75	2							1/3																							
	285		274	12 ^A		11:00	50	60/75	2							1/7																							
	286		275	13 ^A		11:15	50	60/75	2							1/21																							
	287		276	14 ^A		11:30	50	60/75	2							1/25																							
	288		277	15 ^A		11:40	50	60/75	2							1/29																							
	289		300	16 ^A	DPB	12:15	50	60/75	2							1/5																							
	290		301	17 ^A		12:20	50	60/75	2							1/9																							
	291		302	18 ^A		12:35	50	60/75	2							1/5																							
	292		303	19 ^A		12:45	50	60/75	2							1/3																							
	293		304	20 ^A		12:55	50	60/75	2							1/3																							
	294		305	21 ^A		1:05	50	60/75	2							1/7																							
	295		306	22 ^A		1:15	50	60/75	2							1/21																							
	296		307	23 ^A		1:20	50	60/75	2							1/5																							
	297		308	24 ^A		1:25	50	60/75	2							1/9																							
	298		311	25 ^A		2:30	50	60/75	2							1/5																							
	299		312	26 ^A		2:45	50	60/75	2							1/9																							
	300		313	27 ^A		2:55	50	60/75	2							1/3																							
	301		314	28 ^A		3:05	50	60/75	2							1/7																							

REMARKS
 tests R.N. 246-257
 pulse test no. 260

+traces 1-4 Dead

waiting on the drills
 BAD cable, laying out another

CDP switch set wrong
 cable delay

trace no 47 Dead
 moved up to first jugs

DFS III SYSTEM PARAMETERS:
 GAIN CONSTANT 30 DB
 UPPER SET LIMIT 22.5 %
 LOWER SET LIMIT 18 %
 FORMAT TYPE:
 9 TRACK 21 TRACK
 GALVO LEVEL:
1.48 DB AUX 15 DB
 OTHER:

MISCELLANEOUS INFORMATION:

SEISMOMETER AND SPREAD INFORMATION					SHOT CONFIGURATION	
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

CLIENT		PARTY NO		PROSPECT		COUNTY		STATE		COUNTRY		LEFT STORAGE		ARRIVED FIELD		LEFT FIELD		ARRIVED STORAGE		DATE		OBSERVER		PAGE													
US NAVY		1186		APR 4		North slope		Alaska		USA		700		730		800		3 25 76		C. Oberst		2 of 2															
LINE	PROFILE	IDENTIFICATION		SHOT CAL	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	SPREAD		S.P. SEIS. OFFSET	SEIS. DEPTH	CDP SWITCH	SETUP	TAPE				MODE	GAIN					RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	FILTERS		NOTCH IN/OUT	REMARKS
		REEL NUMBER	FILE NUMBER					TOP	BOT.						1	2					4	RECORD LENGTH	PARITY ERRORS	1-4/24		5-8	9-12	13-16	17-20	21-24				FINAL GAIN DB	FREQ.		
122	302	67268	315	29 ^A	Raw	3:00	50	60/75	2			5			10'	1/21	5'		✓	6sec	AGC	50	48	48	50	42	48	90	FAST	577	124	8	36	out			
	303		316	30 ^A		3:15	50	60/75	2							1/25																			Trace no 47 Dead		
	304		317	31 ^A		3:30	50	60/75	2							1/29																					
	305		320	32 ^A		3:40	50	60/75	2							1/33																					
	306		321	33 ^A		3:45	50	60/75	2							1/37																					
	307		322	34 ^A		4:25	50	60/75	2							1/3			6																	CABEC mess up layout crew	
	308		323	35 ^A		4:45	50	60/75	2							1/3			7																		
	309		324	36 ^A		4:55	50	60/75	2							1/3																					
	310		325	37 ^A		5:10	50	60/75	2							1/4																					
	311		326	38 ^A		5:20	50	60/75	2							1/3																					
	312		327	39 ^A		5:30	50	60/75	2							1/3																					
	313		330	40 ^A		5:35	50	60/75	2							1/21																					
	314		331	41 ^A		5:40	50	60/75	2							1/25																					Dead trace no 45?
	315		332	42 ^A	DPB	6:30	50	60/75	2							1/3			8																		
	316		333	43 ^A		6:45	50	60/75	2							1/3																					
	317		334	44 ^A		6:50	50	60/75	2							1/3																					
	318		335	45 ^A		7:00	50	60/75	2							1/3																					
	319		336	46 ^A		7:30	50	60/75	2							1/21																					(Tape label says 672639 starts here)
	320		337	47 ^A		7:35	50	60/75	2							1/25																					
	321		340	48 ^A		7:40	50	60/75	2							1/29																					
	322		341	49 ^A		7:45	50	60/75	2			360's				1/33																					last shot of day

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.

SHOT CONFIGURATION	

DFS III SYSTEM PARAMETERS:	
GAIN CONSTANT	30 DB
UPPER SET LIMIT	62.5 %
LOWER SET LIMIT	18 %
FORMAT TYPE:	
<input type="checkbox"/> 9 TRACK	<input checked="" type="checkbox"/> 21 TRACK
GALVO LEVEL:	
1-18 DB AUX	15 DB
OTHER:	

MISCELLANEOUS INFORMATION:	

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																							
US NAVY		1180	NPR 4	North Slope	Alaska	USA	7	730			3-26-78	Hoisent	1 of 2																							
IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN				FILTERS				REMARKS												
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL	PLAY BACK	TIME	SIZE	TOP BOT	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	A SEIS OFFSET	B SEIS DEPTH	COP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)					FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ	LOW CUT		NOTCH			
																		1	2	4		1-4/24	5-8		9-12	13-16	17-20	21-24			FREQ	SLOPE	IN	OUT		
122	323	67213	347	1 ^A	RAW	8:15	50	60/75	2			S		10'		1/2	1	X	6sec		ACC	39/48	50/42	48/30	30/48	42/54	48/54	40	Fast	577	124	8	36	Out	tests # 242 to 345 Pulse test # 346 Trace no 7 Dead Serpenters on line waiting on Drills Dead trace # 45 moved up to fix trace Fixing gravity bomb. moved up to six Jugs Trace no 1 Dead & 20	
	324		350	2 ^A		8:30	50	60/75	2							1/2																				
	325		351	3 ^A		8:40	50	60/75	2							1/2																				
	326		352	4 ^A		8:50	50	60/75	2							1/2																				
	327		353	5 ^A		9:00	50	60/75	2							1/2																				
	328		354	6 ^A		10:00	50	60/75	2							1/2																				
	329		355	7 ^A		10:20	50	60/75	2							1/2																				
	330		356	8 ^A		10:30	50	60/75	2							1/2																				
	331		357	9 ^A	DPB	11:00	50	60/75	2							1/2	2																			
	332		360	10 ^A	RAW	11:10	50	60/75	2							1/2																				
	333		361	11 ^A	DPB	11:15	50	60/75	2							1/2	3																			
	334		362	12 ^A	RAW	11:25	50	60/75	2							1/2	1																			
	335		363	13 ^A		11:35	50	60/75	2							1/2																				
	336		364	14 ^A		11:45	50	60/75	2							1/2																				
	337		365	15 ^A		11:55	50	60/75	2							1/2																				
	338		366	16 ^A		12:00	50	60/75	2							1/2																				
	339		367	17 ^A		12:45	50	60/75	2							1/2	4																			
	340		370	18 ^A	DPB	1:15	50	60/75	2							1/2	5																			
	341		371	19 ^A	RAW	1:25	50	60/75	2							1/2																				
	342		372	20 ^A		1:30	50	60/75	2							1/2																				
	343		373	21 ^A	DPB	1:40	50	60/75	2							1/2																				
	344		374	22 ^A	RAW	1:55	50	60/75	2							1/2																				
	345		375	23 ^A		2:00	50	60/75	2							1/2																				
	346		376	24 ^A		2:30	50	60/75	2							1/2																				
	347		377	25 ^A	DPB	3:00	50	60/75	2							1/2	6																			
	348		3400	26 ^A	RAW	3:15	50	60/75	2							1/2																				
	349		401	27 ^A	RAW	3:20	50	60/75	2							1/2																				
	350		402	28 ^A		3:30	50	60/75	2							1/2																				

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	SPREAD PATTERN

SHOT CONFIGURATION	

DFS III SYSTEM PARAMETERS:
 GAIN CONSTANT 30 DB
 UPPER SET LIMIT 67.5 %
 LOWER SET LIMIT 18 %
 FORMAT TYPE:
 9 TRACK 21 TRACK
 GALVO LEVEL:
 1-48 DB AUX 15 DB
 OTHER:

MISCELLANEOUS INFORMATION:
 Reason for ^{30 min} DPB's CAMAN
 Has bad connection in swi

CLIENT: US NAVY PARTY NO: 1186 PROSPECT: APR 4 COUNTY: North Slope STATE: Alaska COUNTRY: USA LEFT STORAGE: 7 ARRIVED FIELD: 730 LEFT FIELD: DATE: 3/26/76 OBSERVER: Chiswick PAGE: 2 of 2

LINE	PROFILE	IDENTIFICATION		SHOT CAL	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	SPREAD				TAPE			GAIN					FILTERS		REMARKS						
		REEL NUMBER	FILE NUMBER					TOP	BOT.						S.P.	SEIS. DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)					FINAL GAIN DB		RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH
		1	2					4	1-4						5-8	9-12	13-16	17-20	21-24	1	2	4	1-4	5-8	9-12	13-16	17-20	21-24		YREQ.	SLOPE	IN	OUT		
122	351	672639	403	29 ^A	RAW	335	50	60/75	2			S	10'			1/21	6	X	6sec	AGC	518/418	42	30	42	48	90	FRT	577	124	8	36	out			
	352		404	30 ^A		345	50	60/75	2							1/25																			
	353		405	31 ^A		355	50	60/75	2							1/29																	No upHole		
	354		406	32 ^A		400	50	60/75	2							1/32																			
	355		407	33 ^A		455	50	60/75	2							1/37																			
	356		410	34 ^A		500	50	60/75	2							1/4																			
	357		411	35 ^A		505	50	60/75	2							1/13																			
	358		412	36 ^A		515	50	60/75	2							1/19																			
	359		413	37 ^A		520	50	60/75	2							1/21																			
	360		414	38 ^A		575	50	60/75	2							1/26																			
	361		415	39 ^A		545	50	60/75	2							1/24																		No upHole	
	362		416	40 ^A		555	50	45/60	2							1/33																		Note Blow trace no 42	
	363		417	41 ^A		700	50	45/60	2							1/38																		" "	
	364			SKIP			50 ^b		2																									Powder lost Down Hole	
	365		420	42 ^A		710	30	50/45	1							1/4																		Hole blew dead trace	
	366		421	43 ^A		715	50	45/60	2							1/13																		Hole blew no 6	
	367			SKIP			50 ^b		2																									Powder lost Down Hole	
	368	672690	422	44 ^A		730	50	60/75	2							打																		new tape 33	
	369		423	45 ^A		745	50	60/75	2							1/25																		trace no 37 dead	
	370		424	46 ^A		755	50	60/75	2							1/19																			
	371		425	47 ^A		800	50	60/75	2							1/33																			TRACE no 46 dead
	372		426	48 ^A		815	50	60/75	2			100's				1/37																		last shot on 122	

SEISMOMETER AND SPREAD INFORMATION						SHOT CONFIGURATION		DFS III SYSTEM PARAMETERS:		MISCELLANEOUS INFORMATION:	
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN			GAIN CONSTANT	UPPER SET LIMIT	LOWER SET LIMIT
									30	62.5	18
									FORMAT TYPE:		
									<input type="checkbox"/> 9 TRACK	<input checked="" type="checkbox"/> 21 TRACK	
									GALVO LEVEL:		
									148-18	AUX 15	DB
									OTHER:		