


CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																									
NAVY		1186	NAR-4		ALASKA	USA	7:00	9:30		10:00	3/17/76	R. L. WILKINSON	1 of 2																									
LINE	PROFILE	IDENTIFICATION		SHOT CAL	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	S.P. OFFSET	NO. DIR.	CODE	SPREAD		S.P. SEIS. OFFSET	SEIS. DEPTH	CDP SWITCH	SETUP	TAPE				MODE	GAIN						RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH IN/OUT	REMARKS
		REEL NUMBER	FILE NUMBER					TOP	BOT.						1	2					4	1-4	5-8	9-12		13-16	17-20	21-24	FINAL GAIN DB	FREQ.	SLOPE							

SEISMOMETER AND SPREAD INFORMATION						
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

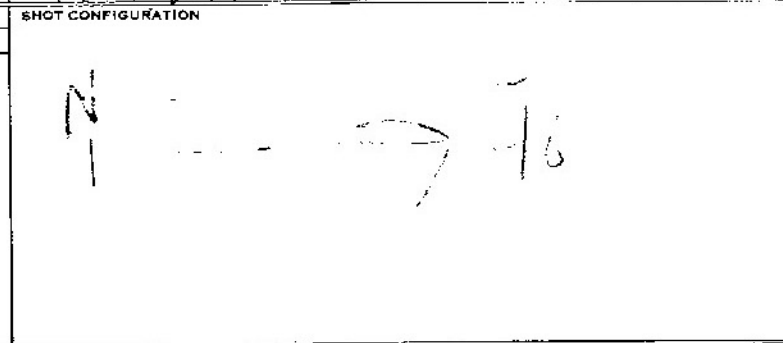

DFS III SYSTEM PARAMETERS:
 GAIN CONSTANT 30 DB
 UPPER SET LIMIT 62.5 %
 LOWER SET LIMIT 18 %
 FORMAT TYPE:
 9 TRACK 21 TRACK
 GALVO LEVEL:
 1-18 DB AUX 15 DB
 OTHER:

MISCELLANEOUS INFORMATION:

7-5
3-3-76

REMARKS FILES #001 to 006 USED FOR TESTS.

12 group TALSPOORD ONLY
 ROUGH PARK ICE.
 (WINDY)
 CABLE DECAY

*46 DEAD

HOLE BLEW *45 DEAD
 *48 & 49 DEAD

*45 + *47 DEAD *
 *43 "
 *39 "

HOLE BLEW

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																												
NAU		1106	NPR-4		ALASKA	USA	7:00	7:30			3/18/76	R. Wein	2 of 3																												
LINE	PROFILE	REEL NUMBER	IDENTIFICATION		PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	SPREAD		TAPE		GAIN						FILTERS		NOTCH IN/OUT	REMARKS													
			FILE NUMBER	SHOT CAL				TOP	BOT						S.P. OFFSET	SEIS DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)						RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	FREQ	SLOPE								
																				1-4/24	5-8	9-12	13-16	17-20	21-24	FINAL GAIN DB															
124	69	672620	120	29 ^A	RAW	2:30	50	60/75	2			N			10'	1/21	4	✓	6.00	AGC	98	10	98	98	98	98	90	FAST	760	124	9	36	out	*44 DEAD *40 "							
	70		121	30 ^A		2:35	50	60/75	2							1/25																									
	71		122	31 ^A		2:50	50	60/75	2							1/29																									
	72		123	32 ^A		2:50	50	60/75	2							1/33																									
	73		124	33 ^A		3:05	50	60/75	2							1/37																									
	74		125	34 ^A		3:10	50	60/75	2							1/41																									
	75		126	35 ^A		4:30	50	60/75	2							1/5	5																						*11 DEAD CABLE DELAY		
	76		127	36 ^A		4:40	50	60/75	2							1/9																									
	77		130	37 ^A		4:50	50	60/75	2							1/13																									
	78		131	38 ^A		5:15	50	60/75	2							1/17																									
	79		132	39 ^A		5:30	50	60/75	2							1/21																									
	80		133	40 ^A		5:40	50	60/75	2							1/25																									
	81		134	41 ^A		5:50	50	60/75	2							1/29																									
	82		135	42 ^A		6:00	50	60/75	2							1/33																									
	83		136	43 ^A		6:45	50	60/75	2							1/5	6																								
	84		137	44 ^A		7:00	50	60/75	2							1/9																									
	85		140	45 ^A		7:15	50	60/75	2							1/13																									
	86		141	46 ^A		7:30	50	60/75	2							1/17																									
	87		142	47 ^A		7:45	50	60/75	2							1/21																									
	88		143	48 ^A		8:00	50	60/75	2							1/25																									
	89		144	49 ^A		8:15	50	60/75	2							1/29																									
	90		145	50 ^A		8:45	50	60/75	2							1/1	7																								
	91	672631	146	51 ^A		9:30	50	60/75	2							1/5																									
	92		147	52 ^A		9:40	50	60/75	2							1/9																									
	93		150	53 ^A		9:50	50	60/75	2							1/13																									
	94		157	54 ^A		10:10	50	60/75	2							1/5	8																								
	95		152	55 ^A		10:20	50	60/75	2							1/9																									
	96		153	56 ^A		10:40	50	60/75	2							1/5	9																								

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

SHOT CONFIGURATION

SPREAD	TAPE	GAIN	FILTERS
SPREAD	TAPE	GAIN	FILTERS

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB
UPPER SET LIMIT 62.5 %
LOWER SET LIMIT 18 %
FORMAT TYPE:
 9 TRACK 21 TRACK
GALVO LEVEL:
18.18 DB AUX 15 DB
OTHER:

MISCELLANEOUS INFORMATION:

DRILLED ON RIVER
WATER TO HOLE BLOW
DRILLED ON RIVER
UP-HOLE DADD
CABLE DELAY
Tape Change
Repaired Noisy Group
*47 DEAD
Manned Up to Fix Group
*48 DEAD

CLIENT		PARTY NO.	PROSPECT	COUNTRY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																								
NAVY		1186	NPR-4		ALASKA	USA	7:00	7:30			3/18/76	R. Usher	1 of 2																								
IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN				FILTERS		REMARKS															
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL.	PLAY BACK	TIME	SIZE	TOP BOT.	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. OFFSET	SEIS DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE		1-4 24	5-8	9-12	13-16	17-20	21-24	FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ	LOW CUT FREQ	SLOPE	NOTCH IN OUT		
124	41	672629	064	1A	MON DPB	8:30	50	60/75	2			N	10'		1/15	1		✓	6 SEC	HIGH PARITY	ALC	48	48	48	48	48	48	90	FAST	-768	124	8	36		FILE # 057 & 063 USED FOR TESTS.		
	42	672630	065	2A	RAW	8:40	50	60/75	2						1/19																				High Parity Count		
	43		066	3A		8:50	50	60/75	2						1/13																				DAMAGED EDGE ON TAPE		
	44		067	4A		9:00	50	60/75	2						1/17																				(Up-Hole Not Planted)		
	45		070	5A		9:10	50	60/75	2						1/21																				SURVEYOR ON SCREW		
	46		071	6A		9:15	50	60/75	2						1/25																				HOLE BLEW NO DEAD		
	47		072	7A		9:20	50	60/75	2						1/29																						
	48		073	8A		9:30	50	60/75	2						1/33																						
	49		074	9A	RAW DPB	10:20	50	60/75	2						1/5	2																				Cable Decay	
	50		075	10A	RAW	10:35	50	60/75	2						1/9																						
	51		076	11A		10:45	50	60/75	2						1/13																						
	52		077	12A		11:00	50	60/75	2						1/17																						Up-Hole Dead
	53		080	13A		11:10	50	60/75	2						1/21																						
	54		101	14A		11:15	50	60/75	2						1/25																						
	55		102	15A		11:25	50	60/75	2						1/29																						*43 DEAD
	56		103	16A		11:30	50	60/75	2						1/33																					*48	
	57		104	17A		12:20	50	60/75	2						1/5	3																					
	58		105	18A		12:30	50	60/75	2						1/9																						
	59		106	19A		12:35	50	60/75	2						1/13																						
	60		107	20A		12:45	50	60/75	2						1/17																						
	61		110	21A		1:00	50	60/75	2						1/21																						*45 DEAD
	62		111	22A		1:10	50	60/75	2						1/25																						
	63		112	23A		1:15	50	60/75	2						1/29																						
	64		113	24A		1:25	50	60/75	2						1/33																						
	65		114	25A		2:05	50	60/75	2						1/5	4																					
	66		115	26A		2:10	50	60/75	2						1/9																						
	67		116	27A		2:20	50	60/75	2						1/13																						
	68		117	28A		2:25	50	60/75	2						1/17																						

SEISMOMETER AND SPREAD INFORMATION						SHOT CONFIGURATION	
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN	

DFS III SYSTEM PARAMETERS:	
GAIN CONSTANT	30 DB
UPPER SET LIMIT	62.5 %
LOWER SET LIMIT	18 %
FORMAT TYPE:	
<input type="checkbox"/> 9 TRACK	<input checked="" type="checkbox"/> 1 TRACK
GALVO LEVEL:	
1-18 18 DB	AUX 15 DB
OTHER:	

MISCELLANEOUS INFORMATION:	

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																						
NAVY		1186	NPR-4		ALASKA	USA	7:00	9:30		10:00	3/17/76	R. Wein	2 of 2																						
IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN				FILTERS		REMARKS													
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL.	PLAY BACK	TIME	SIZE	TOP BOT.	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. OFFSET	SEIS DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE		INITIAL GAIN (DB)				FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT FREQ.	SLOPE	NOTCH IN	NOTCH OUT	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22		23	24	25	26	27	28	29	30	31	32			
124	29	043	043	29 ^A	RAW	6:50	50	60/75	2			N			10'	1/25	3	✓	600			ACC	SKAMP				90	FST	7.0	124	8	36	out	"21 DEAD	
	30		044	30 ^A		6:55	50	60/75	2							1/29																			
	31		045	31 ^A		7:00	50	60/75	2							1/33																			
	32		046	32 ^A	DPA	7:45	50	60/75	2							1/5	4																		* 45 NOISY
	33		047	33 ^A		7:50	50	60/75	2							1/9																			REPLANTED NOISY TRACE
	34		050	34 ^A		7:55	50	60/75	2							1/13																			
	35		051	35 ^A		8:00	50	60/75	2							1/17																			
	36		052	36 ^A		8:05	50	60/75	2							1/21																			
	37		053	37 ^A		8:10	50	60/75	2							1/25																			
	38		054	38 ^A		8:15	50	60/75	2							1/29																			
	39		055	39 ^A		8:20	50	60/75	2							1/33																			
	40		056	40 ^A		8:30	50	60/75	2							1/37																			

SEISMOMETER AND SPREAD INFORMATION						
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

SHOT CONFIGURATION	

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB

UPPER SET LIMIT 63.5 %

LOWER SET LIMIT 11 %

FORMAT TYPE:

9 TRACK 21 TRACK

GALVO LEVEL:

1-18 DB AUX 15 DB

OTHER:

MISCELLANEOUS INFORMATION:

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																			
Navy		1186	NPR-4				7:50	7:30			3/18/66	R. Wein	3 of 3																			
LINE	IDENTIFICATION		SHOT CAL	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	SPREAD		S.P. SEIS. DEPTH	CDP SWITCH	SETUP	TAPE				MODE	GAIN					FILTERS		NOTCH IN/OUT	REMARKS
	PROFILE	REEL NUMBER					FILE NUMBER	TOP BOT.						NO. 2 DIR.	SEIS. DEPTH				RECORD LENGTH	PARITY ERRORS	1-4/24	5-8		9-12	13-16	17-20	21-24	FINAL GAIN DB	RELEASE RATE	TRIP DELAY		

SEISMOMETER AND SPREAD INFORMATION						
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

SHOT CONFIGURATION	

DFS III SYSTEM PARAMETERS:
 GAIN CONSTANT 30 DB
 UPPER SET LIMIT 62.5 %
 LOWER SET LIMIT 18 %
 FORMAT TYPE:
 9 TRACK 21 TRACK
 GALVO LEVEL:
198 DB AUX 15 DB
 OTHER:

MISCELLANEOUS INFORMATION:

97 DEAD
 # 43 "
 # 39 "

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE															
Navy		1186	NPR-4	NORTH STAR	ALASKA	USA	7:00	7:30	9:30	10:00	3/19/76	R. White	1 of 2															
LINE	PROFILE	IDENTIFICATION		SHOT	PLAY BACK	TIME	SIZE	SHOT		SPREAD			TAPE		GAIN						FILTERS		REMARKS					
		REEL NUMBER	FILE NUMBER					NO. CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. OFFSET	SEIS. DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)						FINAL GAIN DB	RELEASE RATE
				CAL													1-4/24	5-8	9-12	13-16	17-20	21-24			FREQ	SLOPE	IN	OUT

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

LINE	SPREAD	SPREAD PATTERN
124	10'	
122	100' W	

GAIN CONSTANT	30 DB
UPPER SET LIMIT	62.5 %
LOWER SET LIMIT	18 %
FORMAT TYPE:	<input type="checkbox"/> 9 TRACK <input checked="" type="checkbox"/> 21 TRACK
GALVO LEVEL:	1.48 18 DB AUX 15 DB
OTHER:	

Bad-CABLE	Trace no. 19 Dead
	Trace no. 15 Dead
	Trace no. 118 Dead
	Trace no. 719 Dead
	Trace no. 345 Dead
	Trace no. 1 Dead
	NO. WPHOLE

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																							
US NAVY		1186	NPR 4	NORTH STAR	ALASKA	USA	700	7:30	930	10:00	3-19-76	R WEIR	2 of 2																							
IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN				FILTERS				REMARKS												
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL	PLAY BACK	TIME	SIZE	TOP BOT.	NO CAPS	CODE	S.P. OFFSET	NO DIR.	CODE	RAS OFFSET	SEIS DEPTH	COP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	1-4/24	5-8	9-12	13-16	17-20	21-24	FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT	NOTCH IN/OUT			
124	129	67263	225	29 ^A	RAW	2:50	50	60/75	2			N		10'	1/25	4	✓	6sec			AGC							90.0	Dead	768	120	8	36	out		
125	130		226	30 ^A		3:00	50	60/75	2																											
	131		227	31 ^A		3:15	50	60/75	2																											
	132		230	32 ^A		3:25	50	60/75	2																											
	133		231	33 ^A		4:00	50	60/75	2								5																			
	134		232	34 ^A		4:10	50	60/75	2																											GETTING QUITE WINDY
	135		233	35 ^A		4:20	50	60/75	2																											
	136		234	36 ^A		4:25	50	60/75	2																											
	137		235	37 ^A		4:35	50	60/75	2																											
	138		236	38 ^A		4:45	50	60/75	2																											Replanted noise Jugs
	139	612632	237	39 ^A		5:00	50	60/75	2																											
	140		240	40 ^A		5:15	50	60/75	2																											
	141		241	41 ^A		5:25	50	60/75	2																											trace # 48 Dead
	142		242	42 ^A		6:00	50	60/75	2																											
	143		243	43 ^A		6:15	50	60/76	2																											Replanted noisy Geophones
	144		244	44 ^A		8:40	50	60/76	2																											fixing Dead Jugs
	145		245	45 ^A		8:45	50	60/76	2																											no upHole
	146		246	46 ^A		8:50	50	60/76	2		600's																									
	147		247	47 ^A		9:10	50	60/76	2																											upHole Reversed
	148		250	48 ^A	DPB	9:20	50	60/75	2																											trace no 43 dead
	149		251	49 ^A	DPB	9:30	50	60/75	2																											trace # 48 # 39 Dead

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.

SHOT CONFIGURATION	

DFS III SYSTEM PARAMETERS:
GAIN CONSTANT <u>30</u> DB
UPPER SET LIMIT <u>62.5</u> %
LOWER SET LIMIT <u>18</u> %
FORMAT TYPE:
<input type="checkbox"/> P TRACK <input checked="" type="checkbox"/> 21 TRACK
GALVO LEVEL:
<u>1.48</u> 18 DB AUX <u>1.5</u> DB
OTHER:

MISCELLANEOUS INFORMATION:

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																								
US NAVY		1186	NPR 4	North slope	ALASKA	USA	7	8	900	1000	3/20/76	R W G R	1 of 2																								
LINE	PROFILE	IDENTIFICATION		SHOT CAL.	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	SPREAD				TAPE		GAIN						FILTERS		REMARKS											
		REEL NUMBER	FILE NUMBER					TOP	BOT			S.P. OFFSET	NO. 1 DIR.	CODE	4 WIRE OFFSET	BIS DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	1-4/24	5-8	9-12		13-16/17-20	21-24	FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT FREQ.	SLOPE	NOTCH IN	NOTCH OUT	
124	150	672632	254	1 ^A	RAW	8:40	50	60/75	2								6 sec	ACC	48/30	48/42	48/48	48/48	48/48	48/48	90	Fast	512	124	8	36	Out	tests # 252 to 255 tests false test # 256					
	151		260	2 ^A	RAW	9:00	50	60/75	2																												
	152		261	3 ^A		9:15	50	60/75	2																									moved up to six group			
	153		262	4 ^A		9:30	50	60/75	2																												
	154		263	5 ^A		9:40	50	60/75	2																												
	155		264	6 ^A		9:50	50	60/75	2																												
	156		265	7 ^A		10:35	50	60/75	2																												
	157		266	8 ^A		10:45	50	60/75	2																												
	158		267	9 ^A		11:05	50	60/75	2																												
	159		270	10 ^A		11:15	50	60/75	2																												
	160		271	11 ^A		11:35	50	60/75	2																												
	161		272	12 ^A	RAW	11:45	50	60/75	2																												
	162		273	13 ^A	RAW	11:50	50	60/75	2																												
	163		274	14 ^A		12:00	50	60/75	2																												
	164		275	15 ^A		12:30	50	60/75	2																												
	165		276	16 ^A		12:45	50	60/75	2																												
	166		277	17 ^A		1:00	50	60/75	2																												
	167		300	18 ^A		1:30	50	60/75	2																												
	168		301	19 ^A		1:35	50	60/75	2																												
	169		302	20 ^A		1:40	50	60/75	2																												
	170		303	21 ^A		1:45	50	60/75	2																												
	171		304	22 ^A		1:50	50	60/75	2																												
	172		305	23 ^A		2:45	50	60/75	2																												
	173		306	24 ^A		2:50	50	60/75	2																												
	174		307	25 ^A		3:00	50	60/75	2																												
	175		310	26 ^A		3:25	50	60/75	2																												
	176		311	27 ^A		3:35	50	60/75	2																												
	177		312	28 ^A		3:40	110	60/90	2																												

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	SPREAD PATTERN

SHOT CONFIGURATION	

DFS III SYSTEM PARAMETERS:
 GAIN CONSTANT 30 DB
 UPPER SET LIMIT 62.5 %
 LOWER SET LIMIT 18 %
 FORMAT TYPE:
 9 TRACK 21 TRACK
 GALVO LEVEL:
 1.45 18 DB AUX 15 DB
 OTHER:

MISCELLANEOUS INFORMATION:
 BEGAN SHOOTING PERFORM

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																											
US NAVY		1186	NPRC	NOOK SOAP	ALASKA	USA	7	8	9:00	10:00	3-20-76	R WEIR	2 of 2																											
LINE	PROFILE	IDENTIFICATION		SHOT CAL	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	SPREAD		S. S. S. S. OFFSET	SIS. DEPTH	COP SWITCH	SETUP	TAPE				MODE	GAIN								RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	FILTERS		NOTCH IN/OUT	REMARKS
		REEL NUMBER	FILE NUMBER					TOP	BOT						RECORD LENGTH	PARITY ERRORS					1-4/24	5-8	9-12	13-16		17-20	21-24	FINAL GAIN DB	FREQ.	SLOPE										

SEISMOMETER AND SPREAD INFORMATION						
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

SHOT CONFIGURATION	
330' rock	

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB

UPPER SET LIMIT 62.5 %

LOWER SET LIMIT 18 %

FORMAT TYPE:

9 TRACK 21 TRACK

GALVO LEVEL:

148 18 DB AUX 15 DB

OTHER:

MISCELLANEOUS INFORMATION:

2 SEC { SHORT RECORD TAPE TRNG. STOPPED PREMATURELY ?

tape change!

round to six sups

last shot of day

CLIENT		PARTY NO.		PROSPECT		COUNTY		STATE		COUNTRY		LEFT STORAGE		ARRIVED FIELD		LEFT FIELD		ARRIVED STORAGE		DATE		OBSERVER		PAGE											
US NAVY		1186		NPR 4		North Slope		Alaska		USA		7		730		930		10:30		3 21 76		L. Trout		182											
LINE	PROFILE	IDENTIFICATION		SHOT CAL.	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	R. S. S. OFFSET	S. S. DEPTH	SPREAD		CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	GAIN					FILTERS			REMARKS			
		TOP	BOT.					INITIAL GAIN (DB)	FINAL GAIN DB							RELEASE RATE	TRIP DELAY							HIGH CUT FREQ.	LOW CUT	SLOPE	NOTCH								
124	198	12633	352	1 ^A	mon	8:20	110	84	90	2		N		10'	1/5	1	X	6sec	ACC	48	48	48	30	48	48	48	90	Fast	512	124	8	36	Out	Test's record no. 33770 351 trace no. 1 Dead CABEL Delay trace no. 45 Dead → trace no. 45 Dead CDP set up wrong trace no. 41 Dead trace no. 37 Dead trace no. 33 Dead Hole Blow No. 29 Dead trace no. 25 Dead trace 21 Dead trace no. 17 & 41 Dead trace no. 12 Dead trace no. 9 Dead trace 4 Dead	
	199		353	2 ^A		8:25	110	84	90	2					1/9																				
	200		354	3 ^A		8:30	110	84	90	2					1/13																				
	201		355	4 ^A		8:40	110	84	90	2					1/17																				
	202		356	5 ^A		8:50	110	84	90	2					1/21																				
	203		357	6 ^A		9:00	110	84	90	2					1/25																				
	204		360	7 ^A		9:10	110	84	90	2					1/29																				
	205		361	8 ^A		9:15	110	84	90	2					1/33																				
	206		362	9 ^A		10:15	110	84	90	2					1/5	2																			
	207		363	10 ^A		10:30	110	84	90	2					1/9																				
	208		364	11 ^A		10:50	110	84	90	2					1/13																				
	209		365	12 ^A		10:55	110	84	90	2					1/17																				
	210		366	13 ^A		11:00	110	84	90	2					1/21																				
	211		367	14 ^A		11:10	110	84	90	2					1/25																				
	212		370	15 ^A		11:20	110	84	90	2					1/29																				
	213		371	16 ^A		11:25	110	84	90	2					1/33																				
	214		372	17 ^A		11:55	110	84	90	2					1/37	4																			
	215		373	18 ^A		12:10	110	84	90	2					1/41																				
	216		374	19 ^A		12:15	110	84	90	2					1/45																				
	217		375	20 ^A		12:30	110	84	90	2					1/49	6																			
	218		376	21 ^A		12:40	110	84	90	2					1/53																				
	219		378	22 ^A		12:50	110	84	90	2					1/57																				
	220		400	23 ^A		12:55	110	84	90	2					1/61																				
	221		401	24 ^A		1:05	110	84	90	2					1/65																				
	222		402	25 ^A		1:35	110	84	90	2					1/69	6																			
	223		403	26 ^A		1:40	110	84	90	2					1/73	7																			
	224		404	27 ^A		1:55	110	84	90	2					1/77																				
	225		405	28 ^A		2:05	110	84	90	2					1/81	8																			

SEISMOMETER AND SPREAD INFORMATION						SHOT CONFIGURATION		DFS III SYSTEM PARAMETERS:		MISCELLANEOUS INFORMATION:	
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN			GAIN CONSTANT	UPPER SET LIMIT	LOWER SET LIMIT
									30	62.5 %	18 %
									FORMAT TYPE:		
									<input type="checkbox"/> 9 TRACK	<input checked="" type="checkbox"/> 21 TRACK	
									GALVO LEVEL:		
									1.48	18 DB	AUX 15 DB
									OTHER:		

CLIENT			PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																									
US NAVY			1186	APR 4	North Slope	Alaska	USA	7	7:30	9:30	10:30	3-21-76	Loibert	1 of 2																									
LINE	PROFILE	IDENTIFICATION		SHOT CAL.	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	P. SEIS. OFFSET	SEIS. DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	GAIN						RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	FILTERS		NOTCH IN/OUT	REMARKS				
		REEL NUMBER	FILE NUMBER					TOP	BOT														INITIAL GAIN (DB)	FINAL GAIN DB	1-4/24	5-8	9-12	13-18				17-20	21-24			FREQ.	SLOPE		
120	226	672833	405	29 ^A	RAW	2:15	110	84/90	2			N	V				1/17	7	V	6sec		AEC							90	FA8768	124	8	36	cut					
	227		407	30 ^A		2:25	110	84/90	2								1/21																						
	228		410	31 ^A		2:30	110	84/90	2								1/25																						
	229		411	32 ^A		2:40	110	84/90	2								1/29																						
	230		412	33 ^A		3:00	110	84/90	2								1/5	8																					
	231		413	34 ^A		3:10	110	84/90	2								1/9																						
	232		414	35 ^A		3:20	110	84/90	2								1/13																						
	233	✓	415	36 ^A		3:30	110	84/90	2								1/17																					(Last shot on tape 672833 Tape change first shot on tape 672834)	
	234	672834	416	37 ^A		4:00	110	84/90	2								1/5	9																					
	235		417	38 ^A		4:05	110	84/90	2								1/9																						
	236		420	39 ^A		4:15	110	84/90	2								1/13																						
	237		421	40 ^A		4:20	110	84/90	2								1/17																						
	238		422	41 ^A		4:30	110	84/90	2								1/5	10																					
	239		423	42 ^A	DRB	5:00	110	84/90	2								1/5	11																					Hole Blow CABLE DELAY
	240		424	43 ^A	DRB	5:15	110	84/90	2								1/9																						
	241		425	43 ^A	RAW	5:45	110	84/90	2								1/3																						
	242		426	45 ^A		5:55	110	84/90	2								1/7																						
	243		427	46 ^A		6:00	110	84/90	2								1/21																						
	244		430	47 ^A		6:10	110	84/90	2								1/25																						
	245		431	48 ^A		6:20	110	84/90	2								1/19																						
	246		432	49 ^A		6:35	110	84/90	2								1/25	12																					
	247		433	50 ^A		6:45	110	84/90	2								1/29																						
	248		434	51 ^A		6:55	110	84/90	2								1/33																						

SEISMOMETER AND SPREAD INFORMATION						
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

SHOT CONFIGURATION	

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB

UPPER SET LIMIT 62.5 %

LOWER SET LIMIT 18 %

FORMAT TYPE:

9 TRACK 21 TRACK

GALVO LEVEL:

1. 18 DB AUX 15 DB

OTHER:

MISCELLANEOUS INFORMATION: