


CLIENT		PARTY NO	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																								
NAVY		186	NPR-4		ALASKA	USA	7:00	8:30	6:30	8:30	2/5/76	Rubin	1																								
IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN				FILTERS		REMARKS															
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL	PLAY BACK	TIME	SIZE	TOP BOT	NO CAPS	CODE	S.P. OFFSET	NO. DIR.	CODE	S.P. OFFSET	SEIS DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE		INITIAL GAIN (DB)					FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH			
																			1	2	4		1-4	5-8	9-12	13-16	17-20	21-24				FREQ.	SLOPE	IN	OUT		
135	1	67622	004	1A	mon DPA	12:30	110	84/90	2			E	10'		15'	1		✓	6sec			MG	48	48	48	48	48	30	90	Fast	768	129	8	36	ent		
	2		005	2A	RW	12:40	140	84/90	2						19'																						
	3		006	3A		12:50	140	84/90	2						113'																						
	4		007	4A		1:00	140	84/90	2						117'																						
	5		010	5A		1:10	140	84/90	2						121'																						
	6		011	6A		1:20	140	84/90	2						125'																						
	7		012	7A		1:25	140	84/90	2						129'																						
	8		013	8A		1:55	140	84/90	2						133'																						
	9		014	9A		2:00	140	84/90	2						137'																						
	10		015	10A		2:10	140	84/90	2						141'																						
	11		016	11A		2:20	140	84/90	2						145'																						
	12		017	12A		2:30	140	84/90	2						15' 2																						
	13		020	13A		3:15	140	84/90	2						19'																						
	14		021	14A		3:30	140	84/90	2						113'																						
	15		022	15A		3:40	140	84/90	2						117'																						
	16		023	16A		3:55	140	84/90	2						121' ✓																						
	17		024	17A		4:05	140	84/90	2						125'																						
	18		025	18A		4:15	140	84/90	2						129'																						
	19		026	19A		5:00	140	84/90	2						133' 3																						
	20		027	20A		5:10	140	84/90	2						137'																						
	21		030	21A		5:20	140	84/90	2						19'																						
	22		031	22A		5:30	140	84/90	2						112'																						
	23		032	23A		5:40	140	84/90	2						117'																						
	24		033	24A		5:50	140	84/90	2						121'																						
	25		034	25A		6:05	140	84/90	2						125'																						
	26		035	26A		6:20	140	84/90	2						129'																						
	27		036	27A		6:30	140	84/90	2						133'																						
	28		037	28A		6:40	140	84/90	2						137'																						

REMARKS FILE # 00186 003  
 USED FOR TESTS  
 CABLE DELAY 2 hrs.  
 REPAIRING GEOPHONES  
 #48 DEAD  
 #49 DEAD  
 CABLE DELAY (Fixing Geophones)  
 #36 DEAD  
 #26  
 #1 DEAD  
 CABLE DELAY  
 GETTING WINDY  
 #47 DEAD  
 #43 "  
 #39 & 45 DEAD  
 #35 DEAD

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.

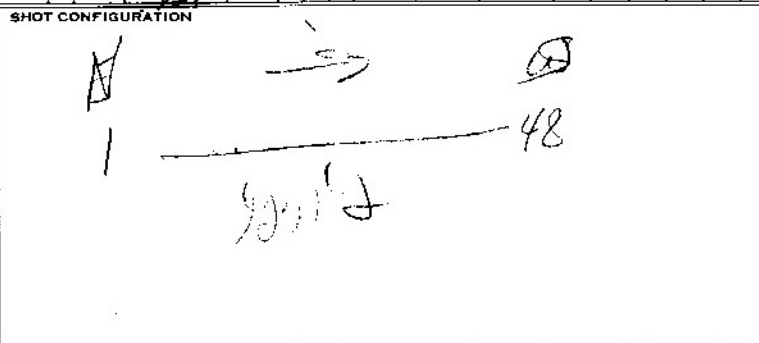

DFS III SYSTEM PARAMETERS:  
 GAIN CONSTANT 30 DB  
 UPPER SET LIMIT 625 %  
 LOWER SET LIMIT 18 %  
 FORMAT TYPE:  
 9 TRACK  21 TRACK  
 GALVO LEVEL:  
 1-18 DB AUX 15 DB  
 OTHER:

MISCELLANEOUS INFORMATION:  
 330' GR INT } m#  
 1320' SP INT }

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																																
NAVY		1186	NPR-4	NORTH SLOPE	ALASKA	USA	7:00	7:30	9:30	10:00	7/29/76	R. Weir	1 of 2																																
IDENTIFICATION				SHOT		SPREAD				TAPE		GAIN				FILTERS		REMARKS																											
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL.	PLAY BACK	TIME	SIZE	TOP BDT	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	P. CODE	S.P. OFFSET	SEIS DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)				FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT	NOTCH	REMARKS													
																						1-4	5-8	9-12	13-16	17-20	21-24	FREQ.	SLOPE	IN	OUT														
CONTINUATION																						7:30 COMPLETE PICKUP ON LINE #127																						FILE # 001 to 013 USED FOR TESTS.	
CONTINUATION																						10:00 MOVE OVER TO LINE #135 CONTINUATION SOUTH																							
CONTINUATION																						1:00 BEGIN LAYING OUT ON LINE #135																							
135	55	62249	019	1A	RAW	3:35	105	8 1/2	2		5	10	1/9	1	✓	600	AGC	18	30	42	42	42	30	18	90	FAST	AUTO	512	124	8	36	OUT													
	56		015	2A	RAW	3:45	105	8 1/2	2				1/13					54	54	54	48	36	36			DEBRAY ONLY						CDP WRONG!!!													
	57		016	3A		3:50	105	8 1/2	2				1/13					42	42	42	42	42	30																						
	58		017	4A		4:00	105	8 1/2	2				1/21					42	42	42	42	42	17																						
	59		020	5A		4:05	105	8 1/2	2				1/25					42	42	42	42	42	17			AUTO	512																		
	60		021	6A		4:10	105	8 1/2	2				1/29					42	42	42	42	42	17																						
	61		022	7A		4:15	105	8 1/2	2				1/29					42	42	42	42	42	17											CDP WRONG!!!											
	62		023	8A		4:20	105	8 1/2	2				1/27					42	42	42	42	42	17											MUST BE THE SPRING FEVER											
	63		024	9A		4:25	105	8 1/2	2				1/41					42	42	42	42	42	17																						
	64		025	10A		4:30	105	8 1/2	2				1/45					42	42	42	42	42	17																						
	65		026	11A		4:40	105	8 1/2	2				1/49					42	42	42	42	42	17																						
	66		027	12A		5:30	105	8 1/2	2				1/5	2				42	42	42	42	42	17											CABLE DOLBY											
	67		030	13A		5:45	105	8 1/2	2				1/9					42	42	42	42	42	17																						
	68		031	14A		6:00	105	8 1/2	2				1/13					42	42	42	42	42	17																						
	69		032	15A	DPB	6:10	105	8 1/2	2				1/17					42	42	42	42	42	17																						
	70		033	16A	JPB	6:25	105	8 1/2	2				1/21					42	42	42	42	42	17											*45 DEAD											
	71		034	17A	RAW	6:40	105	8 1/2	2				1/25					42	42	42	42	42	17											*48 "											
	72		035	18A	RAW	6:55	105	8 1/2	2				1/29	3				42	42	42	42	42	17																						
	73		036	19A	RAW	7:00	105	8 1/2	2				1/17					42	42	42	42	42	17																						
	74		037	20A		7:35	105	8 1/2	2				1/5	4				42	42	42	42	42	17																						
	75		040	21A		7:40	105	8 1/2	2				1/9					42	42	42	42	42	17																						
	76		041	22A		7:50	105	8 1/2	2				1/15					42	42	42	42	42	17																						
	77		042	23A		7:55	105	8 1/2	2				1/17					42	42	42	42	42	17																						
	78		043	24A		8:00	105	8 1/2	2				1/21					42	42	42	42	42	17																						
	79		044	25A		8:10	105	8 1/2	2				1/25	✓				42	42	42	42	42	17											*18 DEAD											

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.

SHOT CONFIGURATION	

DFS III SYSTEM PARAMETERS:	
GAIN CONSTANT	30 DB
UPPER SET LIMIT	62.5 %
LOWER SET LIMIT	18 %
FORMAT TYPE:	<input type="checkbox"/> 9 TRACK <input checked="" type="checkbox"/> 21 TRACK
GALVO LEVEL:	140 18 DB AUX 15 DB
OTHER:	

MISCELLANEOUS INFORMATION:	

CLIENT		PARTY NO. PROSPECT		COUNTY		STATE		COUNTRY		LEFT STORAGE		ARRIVED FIELD		LEFT FIELD		ARRIVED STORAGE		DATE		OBSERVER		PAGE																
NAVY		1186 NPR-4				ALASKA		USA		7:00		9:00		7:30		10:00		3/8/26		R. White		1																
IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN				FILTERS		REMARKS																
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL.	PLAY BACK	TIME	SIZE	TOP BOT.	NO CAPS	CODE	S.P. OFFSET	NO. DIR.	CODE	S.EIS. OFFSET	S.EIS. DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)						FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH				
																						1-4/24	5-8	9-12	13-16	17-20	21-24					FREQ.	SLOPE	IN	OUT			
135	29	672622	046	1A	MON DPB	11:00	100	84/90	2			E		10'	1/5	1	✓	65FC	A6C			90	93	98	98	92	30	90	F8T	.268	124	8	36	out	REPLANT #45			
	30		047	2A	RAW	11:10	110	84/90	2																													
	31		050	3A		11:15	110	84/90	2																													
	32		051	4A		11:25	110	84/90	2																													
	33		052	5A		11:40	110	84/90	2																													
	34		053	6A		11:55	110	84/90	2																													
	35		054	7A		12:05	110	84/90	2																													
	36		055	8A		12:15	110	84/90	2																													
	37		056	9A		1:25	110	84/90	2																													
	38		057	10A		1:35	110	84/90	2																													
	39		060	11A		1:55	110	84/90	2																													
	40		061	12A		2:10	110	84/90	2																													
	41		062	13A		2:25	110	84/90	2																													
	42		063	14A		2:40	110	84/90	2																													
	43		064	15A		2:50	110	84/90	2																													
	44		065	16A		3:00	110	84/90	2																													
	45		066	17A		3:05	110	84/90	2																													
	46		067	18A		3:15	110	84/90	2																													
	47	672622	070	19A		4:10	110	84/90	2																													
	48		071	20A		4:25	110	84/90	2																													
	49		072	21A		4:45	110	84/90	2																													
5B	50		073	22A		5:10	110	84/90	2																													
	51		074	23A		5:20	110	84/90	2																													
	52		075	24A		5:25	100	84/90	2																													
	53		076	25A		5:30	100	84/90	2																													
	54		077	26A		5:40	100	84/90	2																													

CABLE DELAY  
#97 DEAD  
MOVED TO FIX GROUP

ONLY PRIMER FIRED  
NITROCEL DIDNT FIRE

TAPE CHANGE

#48 DEAD  
DYNAMITE

END OF LINE 135  
COMPLETE PICKUP AND MOVE TO NEW CAMP SITE.

SEISMOMETER AND SPREAD INFORMATION						SHOT CONFIGURATION		DFS III SYSTEM PARAMETERS:		MISCELLANEOUS INFORMATION:	
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.						

1-6  
1-28  
32  
7-16

GAIN CONSTANT 30 DB  
UPPER SET LIMIT 62.5 %  
LOWER SET LIMIT 18 %  
FORMAT TYPE:  
 9 TRACK  21 TRACK  
GALVO LEVEL:  
1-18 DB AUX 15 DB  
OTHER:

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																			
Navy		1186	NPR-4	North Slope	ALASKA	USA	7:00	7:30	9:30	10:00	4/29/76	R. Weir	2 of 2																			
IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN				FILTERS				REMARKS								
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL.	PLAY BACK	TIME	SIZE	TOP BOT.	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	P. SEIS. OFFSET	SEIS. DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)				FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH
135	80	67769	045	26A	RAW	8:25	100	85/90	2			S		10'		1/29	4	✓	60sec			AGC	SAME				90	FIRST	129	8	35	out
	81		046	27A		8:30	100	75/90	2																							
	82		047	28A		8:40	100	75/90	2																							

50lbs of STICKY SOLLS  
of PENITOL

SEISMOMETER AND SPREAD INFORMATION							SHOT CONFIGURATION		DFS III SYSTEM PARAMETERS:		MISCELLANEOUS INFORMATION:	
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN						
										GAIN CONSTANT	30	DB
										UPPER SET LIMIT	62.5	%
										LOWER SET LIMIT	18	%
										FORMAT TYPE:		
										<input type="checkbox"/> 9 TRACK	<input checked="" type="checkbox"/> 21 TRACK	
										GALVO LEVEL:		
										18	DB	AUX 15
										OTHER:		

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																						
NAVY		1186	NPR-4	North Slope	Alaska	USA	7:00	8:00	8:00	9:00	4/30/66	R. W. Wolk	1 of 1																						
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL	PLAY BACK	TIME	SIZE	SHOT		NO. CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	SPREAD		SEIS DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	GAIN					RELEASE RATE	TRIP DELAY	HIGH CUT FREQ	FILTERS		NOTCH IN/OUT	REMARKS
								TOP	BOT.						1-4/24	5-8								9-12	13-16	17-20	21-24	FINAL GAIN DB				FREQ.	SLOPE		

SEISMOMETER AND SPREAD INFORMATION				
CODE	SEIS. TYPE	NO./GP.	INT.	SPREAD PATTERN

SHOT CONFIGURATION	

DFS III SYSTEM PARAMETERS:	
GAIN CONSTANT	30 DB
UPPER SET LIMIT	67.5 %
LOWER SET LIMIT	18 %
FORMAT TYPE:	<input type="checkbox"/> 9 TRACK <input checked="" type="checkbox"/> 21 TRACK
GALVO LEVEL:	148 18 DB AUX 15 DB
OTHER:	

REMARKS: Five #030 to 062 used for tests.  
 ← BEGIN USING 100lbs PERMIT & 5 1/2 ANCHOR #44 DEAD  
 WAIT ON PERMIT  
 WRITING ON DAIL TO RE-DRILL S-P\*95 LOST 100lbs OF PERMIT  
 HOLE BECAME #16 DEAD  
 SHORT RECORD HIT EST  
 \*45 DEAD SP\*105 to 109 RIGOR.  
 NO UP-HOLE W.O.D.  
 W.O.D. #44 DEAD

3sec TAPE CHANGE

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																								
Navy		1186	NPR-4	NORTH SLOPE	ALASKA	USA	7:00	8:00	8:00	9:00	9/29/76	R. WEIN	2 of 2																								
IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN				FILTERS		REMARKS															
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL.	PLAY BACK	TIME	SIZE	TOP BOT.	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	IS. VERT. OFFSET	SEIS. DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)					FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT	SLOPE	NOTCH IN/OUT	REMARKS			
135	111	622670	117	29A	RAW	4:50	105	80/105	2			5	10'			1/21	5	✓	6200			AGC	SAME					90	FAST	120	0	36	out	HOLY BLOW			
	112		120	30A		5:00	105	75/105	2							1/25																					
	113		121	31A		5:45	105	80/105	2							1/29																					
	114		122	32A		5:20	105	80/105	2							1/33																					
	115		123	33A		6:05	105	85/105	2							1/5	6																			* 40 DEAD W.O.D	
	116		124	34A		6:15	105	80/105	2							1/9																					
	117		125	35A		6:20	105	85/105	2							1/13																					
	118		126	36A		6:40	105	80/105	2							1/17																					
	119		127	37A		6:50	105	85/105	2							1/21																					* 47 DEAD W.O.D
	120		130	38A		7:25	105	85/105	2							1/25																					
	121		131	39A		7:35	105	85/105	2							1/29																					
	122		132	40A		7:45	105	85/105	2							1/33																					

SEISMOMETER AND SPREAD INFORMATION						SHOT CONFIGURATION		DFS III SYSTEM PARAMETERS:		MISCELLANEOUS INFORMATION:	
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN					
									GAIN CONSTANT	30	DB
									UPPER SET LIMIT	62.5	%
									LOWER SET LIMIT	18	%
									FORMAT TYPE:		
									<input type="checkbox"/> 9 TRACK	<input checked="" type="checkbox"/> 21 TRACK	
									GALVO LEVEL:		
									1 <sup>st</sup> 18 DB	AUX 15	DB
									OTHER:		

CLIENT NAVY PARTY NO. 1186 PROSPECT NPR-4 COUNTY NORTH SLOPE STATE ALASKA COUNTRY USA LEFT STORAGE 7:00 ARRIVED FIELD 8:00 LEFT FIELD  ARRIVED STORAGE  DATE 5/1/76 OBSERVER R. Weir PAGE 1 of 2

LINE	IDENTIFICATION			SHOT CAL.	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	S.P. OFFSET	SPREAD					TAPE			GAIN						FILTERS		NOTCH IN/OUT	REMARKS								
	PROFILE	REEL NUMBER	FILE NUMBER					TOP	BOT.				NO. 1 DIR.	CODE	SEIS. OFFSET	WEST	EAST	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)							FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT			
																	1-4	5-8	9-12	13-16	17-20	21-24																
135	123	672670	146	1A	MON/DPA	9:30	105	85'	120	2							10'	1/5	1	✓	6sec	AGC	24	30	30	36	30	24	90	FAST	1070	124	8	30	cut	W.O.D.		
	124		147	2A	RAW	9:40	105	85'	120	2								1/9																		W.O.D.		
	125		150	3A		10:00	105	85'	120	2								1/13																		W.O.D.		
	126		151	4A		10:10	105	85'	120	2								1/17																		← (50 lbs STUCK 4 5th POINT) *A7 DEAD		
	127		152	5A		10:40	105	85'	120	2								1/19			2																	
	128		153	6A		10:50	105	85'	120	2								1/19																				
	129		154	7A		11:00	105	85'	120	2								1/13																				
	130		155	8A		11:10	105	85'	120	2								1/17																				
	131		156	9A		11:50	105	85'	120	2								1/15			3																Very Windy	
	132		157	10A		12:00	105	85'	120	2								1/19																				
	133		160	11A		12:10	105	85'	120	2								1/13																				
	134		161	12A		12:25	105	70'	125	2								1/17																				
	135		162	13A		12:50	105	85'	120	2								1/21																				*A7 DEAD
	136		163	14A		1:25	105	85'	120	2								1/11			4																	
	137		164	15A		1:50	105	85'	120	2								1/15																				W.O.D.
	138		165	16A		2:00	105	85'	120	2								1/19																			LAYING ACROSS HIGH BARE HILLS - HARD TO GET GOOD PLANTS. VERY WINDY	
	139		166	17A		2:50	105	85'	120	2								1/11			5																	
	140		167	18A		2:40	105	85'	120	2								1/14			6																	
	141		170	19A		2:00	105	85'	120	2								1/15																				
	142		171	20A		3:15	105	85'	120	2								1/19																				
	143		172	21A		3:20	105	85'	120	2								1/13																				
	144		173	22A		3:40	105	85'	120	2								1/17																				
	145		174	23A		3:45	105	85'	120	2								1/21																				
	146	672671	175	24A		3:55	105	85'	120	2								1/25																				
	147		176	25A		4:45	105	85'	120	2								1/15			7																	
	148		177	26A		4:55	105	85'	120	2								1/19																				
	149		200	27A		5:15	105	85'	120	2								1/13																				
	150		201	28A		5:30	105	85'	120	2								1/15			8																	

← (50 lbs STUCK 4 5th POINT) \*A7 DEAD

— TAPE CHANGE —

SEISMOMETER AND SPREAD INFORMATION						SHOT CONFIGURATION	
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN	

DFS III SYSTEM PARAMETERS:	
GAIN CONSTANT	30 DB
UPPER SET LIMIT	62.5%
LOWER SET LIMIT	18%
FORMAT TYPE:	
<input type="checkbox"/> 9 TRACK	<input checked="" type="checkbox"/> 21 TRACK
GALVO LEVEL:	
1-18 DB	AUX 15 DB
OTHER:	

MISCELLANEOUS INFORMATION:	

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																							
NAVY		1186	NPR-4	North Slope	Alaska	USA	9:00	8:00			5/1/70	R. White	2 of 2																							
IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN				FILTERS				REMARKS												
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL	PLAY BACK	TIME	SIZE	TOP BOT	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	R. S. S. OFFSET	SEIS DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)				FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH				
																		1 2 4				1-4/24	5-8		9-12	13-16	17-20	21-24		FREQ.	SLOPE	IN	OUT			
135	151	622671	202	29A	RAW	5:40	105	85/190	2			N	10'		14	8		✓	6000			160	SAME				90	EXT	300	120	8	30	cut	*48 DEAD		
	152		203	30A		6:05	105	85/190	2						113																			*45 DEAD		
	153		204	31A		6:15	105	85/190	2						117																					
	154		205	32A		6:30	105	85/190	2						117	9																				
	155		206	33A		6:50	105	85/190	2						117																					
	156		207	34A		6:55	105	85/190	2						121																					*44 DEAD
	157		210	35A		7:00	105	85/190	2						121																					
	158		211	36A		7:10	105	85/190	2						129																					
	159		212	37A		7:30	105	85/190	2						133																					
	160		213	38A	DAB	7:45	105	85/190	2						137																					*47 DEAD
	161		214	39A		7:50	105	85/190	2						141																					*48 *
	162		215	40A		8:00	105	85/190	2						145																					

COMPLETED LINE #135  
COMPLETE PICKUP & WARE MOVE TO CAMP.

SEISMOMETER AND SPREAD INFORMATION						SHOT CONFIGURATION		DFS III SYSTEM PARAMETERS:		MISCELLANEOUS INFORMATION:	
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN			GAIN CONSTANT	UPPER SET LIMIT	LOWER SET LIMIT
									30	62.5	18
									FORMAT TYPE:		
									<input type="checkbox"/> 9 TRACK <input checked="" type="checkbox"/> 21 TRACK		
									GALVO LEVEL:		
									1-18 DB AUX 15 DB		
									OTHER:		