


CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																			
		1132	NPR-4		ALASKA	USA	ZOO	8.00	8.00	8:30	4-8-76		1 of 2																			
LINE	PROFILE	IDENTIFICATION		SHOT CAL.	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	SPREAD		COP SWITCH	SETUP	TAPE				MODE	GAIN						FILTERS			REMARKS
		REEL NUMBER	FILE NUMBER					TOP	BOT.					R. SEIS. OFFSET	L. SEIS. OFFSET			RECORD LENGTH	PARITY ERRORS	1-4/24	5-8		9-12	13-16	17-20	21-24	FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT FREQ.	

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.
0	D-20 10HZ	18	25'	inline	330'
SPREAD PATTERN					
48 TRACE inline split NO GAP					

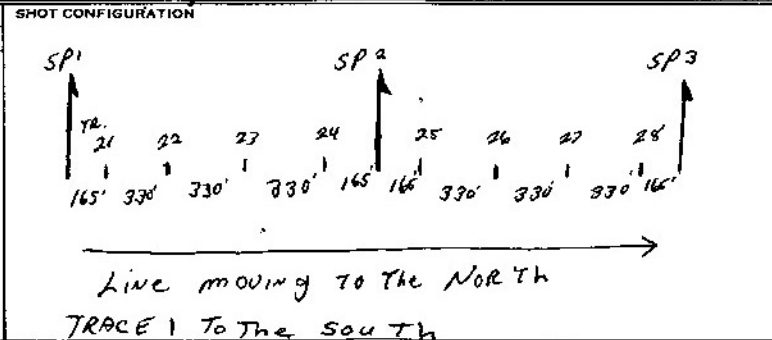

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB
 UPPER SET LIMIT 62.5 %
 LOWER SET LIMIT 18 %
 FORMAT TYPE:
 9 TRACK 21 TRACK
 GALVO LEVEL:
 1-24 27 DB AUX 21 DB
 OTHER:
 25-48 27 DB

MISCELLANEOUS INFORMATION:

REC'D 4440 TEST TB
 " " 4450 pulse TEST
 " " 4462 pulse TEST
 4474 pulse TEST

No up hole

CLIENT: Husky PARTY NO: 1182 PROSPECT: NPR-4 COUNTY: _____ STATE: Alaska COUNTRY: _____ LEFT STORAGE: _____ ARRIVED FIELD: _____ LEFT FIELD: _____ ARRIVED STORAGE: _____ DATE: 4-9-76 OBSERVER: P. Loss PAGE: 2 of 2

LINE	PROFILE	IDENTIFICATION		SHOT CAL	PLAY BACK	TIME	SHOT			SPREAD				TAPE			GAIN						FILTERS			REMARKS										
		REEL NUMBER	FILE NUMBER				NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.E. OFFSET	S.E. DEPTH	CDP SWITCH	SETUP	RECORD LENGTH	PARITY ERRORS	INITIAL GAIN (DB)						HIGH CUT FREQ.	LOW CUT		NOTCH IN/OUT									
																		1-4/24	5-8	9-12	13-16	17-20	21-24		FINAL GAIN DB			RELEASE RATE	TRIP DELAY	FREQ.	SLOPE					
136	68	543537	-	A	RAW	-	-	-			S				6 sec			OPR	60	60	60	60	60	42	90	F87	576	124	8	36	OUT	SP68 SKIP MEAD RIVER				
	69		4551																42	60	60	60	60	60												
	70		4552																																	
	71		4553																																	
	72		4554																																	
	73		4555																																	
	74		4556																																	
	75		4557																																	
	76		4560																																	
	77		4562																																	
	78		4563																																	
	79		4564																																	
	80		4565																																	
	81		4566																																	
	82		4567																																	
	83		4570																																	
	84		4571																																	


only the primer fired
NO UP HOLE

SEISMOMETER AND SPREAD INFORMATION						SHOT CONFIGURATION		DFS III SYSTEM PARAMETERS:		MISCELLANEOUS INFORMATION:		
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN			GAIN CONSTANT	DB		
							SAME AS PAGE ONE		UPPER SET LIMIT	%	REC # 4550 pulse TEST 4560 pulse TEST	
									LOWER SET LIMIT	%		
									FORMAT TYPE:			
									<input type="checkbox"/> 9 TRACK	<input type="checkbox"/> 21 TRACK		
									GALVO LEVEL:			
									1-24	DB	AUX	DB
									OTHER:			

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																							
Husky		1182	NPR-4		Alaska		700	730	730	8:00	4-9-76	A Loss	106																							
IDENTIFICATION				SHOT				SPREAD				TAPE		GAIN					FILTERS			REMARKS														
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL.	PLAY BACK	TIME	SIZE	TOP BOT.	NO CAPS	CODE	S.P. OFFSET	NO. DIR.	CODE	R. SENS. OFFSET	SPREAD DIST.	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)					FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT FREQ.	SLOPE	NOTCH IN/OUT			
136	H1	5235	4525	A	RAW		50	59/75	2			S				1/5	1	✓	6		OPR	60	60	60	60	60	42	90	FRT	676	124	5	36	OUT		
	H2		4516				50	51/75	2							1/9						42	60	60	60	60										
	H3		4517				55	7/75	2							1/13																				
	H4		4520				50	59/75	2							1/17																				
	H5		4521				50	55/75	2							1/21																				
	H6		4522				50	51/75	2							1/25																				
	H7		4523				55	7/75	2							1/29																				
	H8						SKIPPED																											MEAD RIVER		
										TAPE CHANGE																										
	H9	523537	4525				50	59/75	2							1/5	2																			
			4526				55	7/75	2							1/9																				
			4527				55	7/75	2							1/13																				
			4530				55	7/75	2							1/17																				
			4531				50	59/75	2							1/21																				
			4532				55	7/75	2							1/25																				
			4533				55	7/75	2							1/29																				
			4534				50	59/75	2							1/33																				
			4535				55	7/75	2							1/37																				
			4536				55	7/75	2							1/41																				
			4537				50	59/75	2							1/45																				
			4540				55	7/75	2							1/5	3																			
			4541				55	7/75	2							1/9																				
			4542				50	59/75	2							1/13																				
			4543				55	7/75	2							1/17																				
			4544				55	7/75	2							1/21																				
			4545				50	59/75	2							1/25																				
			4546				55	7/75	2							1/29																				
			4547				55	7/75	2							1/33																				

TRACES 24-36 INTERCHANGED WITH TRACES 37-45

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	SPREAD PATTERN
	D-20	15	20'	IN LINE	48 TRACES IN LINE
	1042				

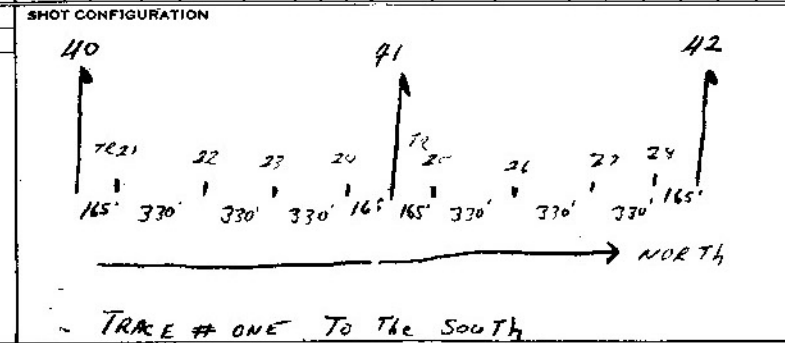

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB
 UPPER SET LIMIT 62.5 %
 LOWER SET LIMIT 18 %

FORMAT TYPE:
 9 TRACK 21 TRACK

GALVO LEVEL:
 1-24 27 DB AUX 21 DB

OTHER:

MISCELLANEOUS INFORMATION:


REC# 4524 pulse TEST
 4537 pulse TEST

CLIENT		PARTY NO	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																						
Husky		1182	NPR-4		Alaska	USA	7.00	8.00			4-5-76	A Loss	2 of 2																						
LINE	PROFILE	IDENTIFICATION		SHOT CAL	PLAY BACK	TIME	SHOT		NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	SPREAD		COP SWITCH	SETUP	TAPE			MODE	GAIN					FILTERS		REMARKS							
		REEL NUMBER	FILE NUMBER				SIZE	TOP BOT					S.P. BELTS OFFSET	SEIS DEPTH			SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS		INITIAL GAIN (DB)					FINAL GAIN DB	RELEASE RATE		TRIP DELAY	HIGH CUT FREQ.	LOW CUT FREQ.	SLOPE	NOTCH IN OUT		
136	29		4500	A	RAW		50	55/75	2		3				1/13	11	✓	6 sec	OPR	60	60	60	60	60	42	90	FAST	576	124	8	36	OUT			
	30		4501				50	55/75	2						1/12						42	60	60	60	60										
	31		4502				50	55/75	2						1/21																				
	32		4503				50	55/75	2						1/25																				
	33		4504				55	71/75	2						1/29																				
	34		4505				50	55/75	2						1/23																				
	35		4507				50	55/75	2						1/5	5																			
	36		4510				55	70/75	2						1/9																				
	37		4511				50	55/75	2						1/13																				
	38		4512				50	55/75	2						1/17																				
	39		4513				55	71/75	2						1/21																				
	40		4514				50	55/75	2						1/25																				

SEISMOMETER AND SPREAD INFORMATION						SHOT CONFIGURATION		DFS III SYSTEM PARAMETERS:		MISCELLANEOUS INFORMATION:		
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN			GAIN CONSTANT	DB		
							SAME AS PAGE ONE		UPPER SET LIMIT	%	REC # 4506 pulse TEST	
									LOWER SET LIMIT	%		
									FORMAT TYPE:			
									<input type="checkbox"/> 9 TRACK	<input type="checkbox"/> 21 TRACK		
									GALVO LEVEL:			
									1-24	DB	AUX	DB
									OTHER:			

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																							
Husky		1182	NPR-4		Alaska		7:00	7:30	7:30	8:30	4-10-76	A Lass	19																							
IDENTIFICATION				SHOT			SPREAD				TAPE				GAIN						FILTERS			REMARKS												
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL.	PLAY BACK	TIME	SIZE	TOP BOT.	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	SEIS. OFFSET	SEIS. DEPTH	COP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)						FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH IN/OUT		
136	85	543537	4572	A	RAW		30	21/75	2			S				1/5	1	✓	6500			QPR	60	60	60	60	60	42	90	FMT	57L	124	8	36	OUT	
	86		4573				30	21/75	2							1/9							42	60	60	60	60									
	87		4574				30	21/75	2							1/13																				
	88		4575				30	21/75	2							1/17																				
	89		4576				30	21/75	2							1/21																				
	90		4577				30	21/75	2							1/25																			RECORD # ERROR SP'S 90	
	91		4500				30	21/75	2							1/29																		+ 91 4477 + 4500 = 4577 + 4600		
	92		4600				55	21/75	2							1/33																		RESET to 4600 SP 92		
	93		4602				30	21/75	2							1/9																				
	94		4603				30	21/75	2							1/13																				
		543538						Tape Change																												
	95		4604				55	21/75	2							1/17																				
	96		4605				30	21/75	2							1/21																				
	97		4606				30	21/75	2							1/25																				
	98		4607				30	21/75	2							1/29																				
	99		4610				55	21/75	2							1/33																				
	100		4612				30	21/75	2							1/1																				
	101		4613				30	21/75	2							1/5																				
	102		4614				30	21/75	2							1/9																				
	103		4615				30	21/75	2							1/13																				
	104		4616				30	21/75	2							1/17																				
	105		4617				30	21/75	2							1/21																				
	106		4620				30	21/75	2							1/25																				
	107		4621				30	21/75	2							1/29																				
	108		4623				30	21/75	2		30' W					1/1																				
	109		4624				30	21/75	2							1/5																				
	110		4625				30	21/75	2							1/9																				
	111		4626				30	21/75	2							1/13																				

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.
0	D-20 10M2	18	25'	1W/line	330
					48 TRACE 1W/line SPLIT NO GAP

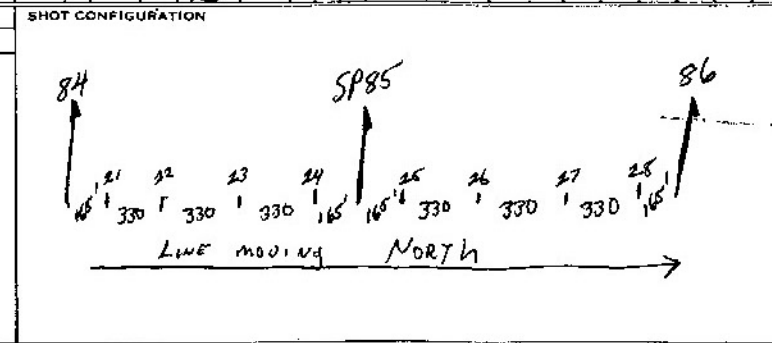

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB

UPPER SET LIMIT 625 %

LOWER SET LIMIT 18 %

FORMAT TYPE:

9 TRACK 21 TRACK

GALVO LEVEL:

1-24 24 DB AUX 21 DB

OTHER:

MISCELLANEOUS INFORMATION:

RBC# 4601 pulse TEST

4611 pulse TEST

4622 pulse TEST

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																							
Husky		1182	NPR-4								4-10-76	A. Loss	2 of 2																							
IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN				FILTERS			REMARKS													
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL.	PLAY BACK	TIME	SIZE	TOP	NO. CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.EIS. OFFSET	S.EIS. DEPTH	COP SWITCH	SETUP	SAMPLE RATE MS			RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)					FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH	
								BOT.										1	2	4				1-4/24	5-8	9-12	13-16	17-20					21-24	FREQ.	SLOPE	IN

SEISMOMETER AND SPREAD INFORMATION						
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

SHOT CONFIGURATION

Same As page one

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT _____ DB

UPPER SET LIMIT _____ %

LOWER SET LIMIT _____ %

FORMAT TYPE:

9 TRACK 21 TRACK

GALVO LEVEL:

1-24 _____ DB AUX _____ DB


OTHER:

MISCELLANEOUS INFORMATION:

CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																			
Husky		1182	NPR-4				7.00	7.30	7.30	8.30	4-11-76	A Loss	181																			
LINE	PROFILE	IDENTIFICATION		SHOT CAL.	PLAY BACK	TIME	SIZE	SHOT		NO. CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	SPREAD		CDP SWITCH	SETUP	TAPE				GAIN						FILTERS			REMARKS	
		REEL NUMBER	FILE NUMBER					TOP	BOT					NO. 2 DIR.	SEIS. OFFSET			SEIS. DIST.	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)						HIGH CUT FREQ.	LOW CUT		NOTCH
																		1-4/24	5-8	9-12	13-16	17-20	21-24	FINAL GAIN DB	RELEASE RATE	TRIP DELAY		FREQ.	SLOPE	IN	OUT	

136	119	543538	4635	A	RAW		30	14/25	2				5	5'	1/5	①	✓	GSC	OPR	60	60	60	60	60	42	90	F87	576	124	8	36	047					
	120	543538	4637				30	14/25	2						1/9																						
	121		4640				30	14/25	2						1/13																						
	122		4641				30	14/25	2						1/17																						
	123		4642				30	14/25	2						1/21																						
	124		4643				30	14/25	2						1/25																						
	125		4644				30	14/25	2						1/29																						
	126		4645				30	14/25	2						1/33																						
	127		4646				30	14/25	2						1/37																						
	128		4650				30	14/25	2						1/5	②																					
	129		4651				30	14/25	2						1/9																						
	130		4652				30	14/25	2						1/13																						
	131		4653				30	14/25	2						1/17																						
	132		4654				30	14/25	2						1/21																						
	133		4655				30	14/25	2						1/25																						
	134		4656				30	14/25	2						1/29																						
	135		4657				30	14/25	2						1/33																						
	136		4660				30	14/25	2						1/37																						
	137		4661				30	14/25	2						1/41																						
							Tape Change																														
	138	543539	4663				30	14/25	2						1/1																						
	139		4664				30	14/25	2						1/5																						
	140		4665				30	14/25	2						1/9																						
	141		4666				30	14/25	2						1/13																						
	142		4667				30	14/25	2						1/17																						
END of Line 136																																					

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	SP. INT.
①	0-20 1042	18	25'	INLINE	330'
				4R TRACE INLINE	

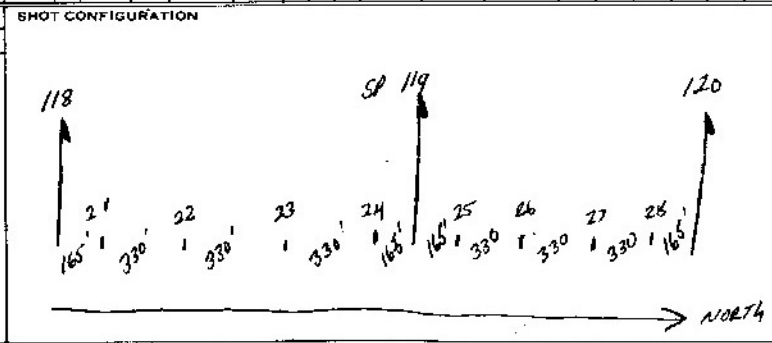

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB
 UPPER SET LIMIT 22.5 %
 LOWER SET LIMIT 18 %
 FORMAT TYPE:
 9 TRACK 21 TRACK
 GALVO LEVEL:
 1-24 24 DB AUX 21 DB
 OTHER:

MISCELLANEOUS INFORMATION:

REC# 4647 pulse TEST
 4642 pulse TEST