


CLIENT		PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE																							
HUSKY		1182	NPR-4	SIMPSON DETAIL	ALASKA	U.S.A.	700	8:30	700	8:00	JAN 29 1966	Vic Donald	1 of 1																							
IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN				FILTERS				REMARKS												
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL.	PLAY BACK	TIME	SIZE	TOP BOT.	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. SEIS. OFFSET	SEIS. DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)				FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH				
																		1	2	4		1-4	8		9-12	13-16	17-20	21-24		FREQ.	SLOPE	IN	OUT			
D5-1	10	102243	256	A	RAW		25	50/60	2	0		E	0	5'		49	0		6sec			OP	60	60	60	54	48	42	36	30	24	18	12	6	0	48
	11		257				25	50/60	2							47							42	48	54	60	60	60	120							
	12		261				25	50/60	2							47							42	48	54	60	60	60	120							
	13		262				25	50/60	2							42							42	48	54	60	60	60	120							
	14		263				25	50/60	2							42							42	48	54	60	60	60	120							
	15		264				25	50/60	2							42							42	48	54	60	60	60	120							
	16		265				25	50/60	2							42							42	48	54	60	60	60	120							
	17		266				25	50/60	2							42							42	48	54	60	60	60	120							
	18		270				25	50/60	2							42							42	48	54	60	60	60	120							
	19		271				25	50/60	2		60' N					42							42	48	54	60	60	60	120							
	20		272				25	50/60	2		60' N					42							42	48	54	60	60	60	120							
	21		273				25	50/60	2							42							42	48	54	60	60	60	120							
	22		274				25	50/60	2							42							42	48	54	60	60	60	120							
	23		275				25	50/60	2							42							42	48	54	60	60	60	120							
	24		276				25	50/60	2							42							42	48	54	60	60	60	120							
	25		277				25	50/60	2							42							42	48	54	60	60	60	120							
	26		300				25	50/60	2							42							42	48	54	60	60	60	120							
	27		301				25	50/60	2							42							42	48	54	60	60	60	120							
	28		302				25	65/75	2							42							42	48	54	60	60	60	120							
	29		303				25	65/75	2							42							42	48	54	60	60	60	120							

SEISMOMETER AND SPREAD INFORMATION						SHOT CONFIGURATION		DFS III SYSTEM PARAMETERS:		MISCELLANEOUS INFORMATION:	
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN			GAIN CONSTANT		REC # 244-253 JAD. TEST REC # 254 PULSE TEST REC # 255 - TEST TB. REC # 260 mms fire REC # 267 PULSE TEST
①	D-20 10MR GEOSPICE	18	25'	INLINE	330'	48 GROUPS INLINE 24/24 SPLIT NO GAP	SP9 SP10 SP11	30 DB 62.5% 14%	9 TRACK <input type="checkbox"/> 21 TRACK <input checked="" type="checkbox"/> GALVO LEVEL: 1-24 21 DB AUX 21 DB		
165' 330' 330' 330' 165' 165' 330' 330' 330' 165'						E → W	OTHER:				
NO. 1 GAP TO THE EAST						PROGRESSING TO THE WEST					

CLIENT **HUSKY** PARTY NO. **1182** PROSPECT **NPR-4** COUNTY **SIMPSON** STATE **ALASKA** COUNTRY **USA** LEFT STORAGE **700** ARRIVED FIELD **800** LEFT FIELD **65** ARRIVED STORAGE **730** DATE **JAN 30/76** OBSERVER **Vic Donald** PAGE **1 of**

LINE	PROFILE	IDENTIFICATION		SHOT CAL	PLAY BACK	TIME	SHOT		NO CAPS	CODE	S.P. OFFSET	SPREAD				CDP SWITCH	SETUP	TAPE		GAIN							FILTERS		REMARKS			
		REEL NUMBER	FILE NUMBER				SIZE	TOP BOT				NO. 1 DIR	NO. 2	NO. 3	NO. 4			SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)								FINAL GAIN DB	RELEASE RATE	TRIP DELAY
DS-1	30	182767	316	A	RAW		25	65/75	2			E	0	5'			65EC	OP	60.60	60.64	48.42	17.0	FAST	376	124	8	36	OUT	ICE HOLE			
	31		320				25	65/75	2										42.48	54	60.60								NEW TONE BOX IN SHOOTING TOWER			
	32		321				25	65/75	2																							
	33		322				25	65/75	2																							
	34		323				25	65/75	2																							
	35		324				25	65/75	2																							
	36		325				25	65/75	2																							
	37		326				25	65/75	2																							
	38		327				25	65/75	2																							
	39		330				25	65/75	2																							
	40		331				25	65/75	2																							
	41		332				25	65/75	2																							
							Tape Change																									
	42	514407	335				25	65/75	2																							
	43		336				25	65/75	2																							
	44		337				25	65/75	2																							
	45		340				25	65/75	2																							
	46		341				25	65/75	2																							
	47		342				25	65/75	2																							
	48		343				25	65/75	2																							
	49		344				25	65/75	2																							
	50		345				25	65/75	2																							
	51		346				25	65/75	2																							
	52		347				25	65/75	2																							
	53		350				25	65/75	2																							

SEISMOMETER AND SPREAD INFORMATION					
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.
①	D-20 10 HZ GEO-RACE	18	25'	INLINE	330

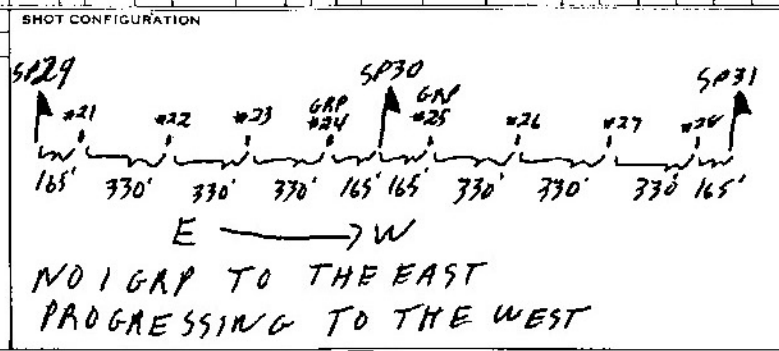

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB

UPPER SET LIMIT 62.5 %

LOWER SET LIMIT 18 %

FORMAT TYPE:

9 TRACK 21 TRACK

GALVO LEVEL:

1-24 21 DB AUX 21 DB

OTHER:

MISCELLANEOUS INFORMATION:

REC# 309 - 313 DRD TEST

REC# 314 PULSE TEST

REC# 315 TEST TB.

REC# 317 TEST TB.

OMIT REC# 333 -

PULSE TEST - REC# 334 - NEW TAPE


NB-LINE BENDS TO NORTH AT SR42

CLIENT: **HUSKY** PARTY NO: **1182** PROSPECT: **NPR-4** COUNTY: **SIMPSON DETAIL** STATE: **ALASKA** COUNTRY: **USA** LEFT STORAGE: **700** ARRIVED FIELD: **770** LEFT FIELD: **400** ARRIVED STORAGE: **600** DATE: **JAN 3/76** OBSERVER: **Vic Donald** PAGE: **1081**

LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT CAL	PLAY BACK	TIME	SIZE	SHOT		NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. SEIS. OFFSET	SEIS. DEPTH	CDP SWITCH	SETUP	TAPE				GAIN								FILTERS			REMARKS			
								TOP	BOT.										SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)								FINAL GAIN DB	RELEASE RATE	TRIP DELAY		HIGH CUT FREQ.	LOW CUT FREQ.	SLOPE
DS-1	54	18274	363	A	ANW		25	65/75	2	0		E	0	5'			1/5	0	6sec	13	0P	60	60	60	54	48	42	120	EMF	376	124	8	36	OUT	BAD FIELD TIME BARAN (STATION) ADJUSTED CLOCKS ON TONE BOXES		
	55		372				25	65/75	2								1/9																				
Tape Change																																					
	56	18275	373				25	65/75	2								1/13																				
	57		374				25	65/75	2								1/17																				
	58		375				25	65/75	2								1/21																				
	59		376				25	65/75	2								1/25																				
	60		377				25	65/75	2								1/29																				
	61		400				25	65/75	2								1/33																				
	62		401				25	65/75	2								1/37				5																
	63		402				25	65/75	2								1/41				28																
Tape Change																																					
	64	18276	406				25	65/75	2								1/45																				
	65		407				25	65/75	2								1/49																				
	66		411				25	65/75	2								1/5																				
	67		412				25	65/75	2								1/9																				
	68		413				25	65/75	2								1/13																				
	69		414				25	65/75	2								1/17																				
	70		415				25	65/75	2								1/21																				
	71		416				25	65/75	2								1/25																				
	72		417				25	65/75	2								1/29																				
	73		420				25	65/75	2								1/33																				
	74		421				25	65/75	2								1/37																				
END OF LINE DS-1 COMPLETE PICK-UP AND START MOVE TO NEW PROSPECT																																					

MULTIPLIER MALFUNCTION - TA 1+24 INTERCHANGED AND TA'S 25+46

SEISMOMETER AND SPREAD INFORMATION				
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN
①	D-20 10HZ GEO-SPEC	18	25'	INLINE

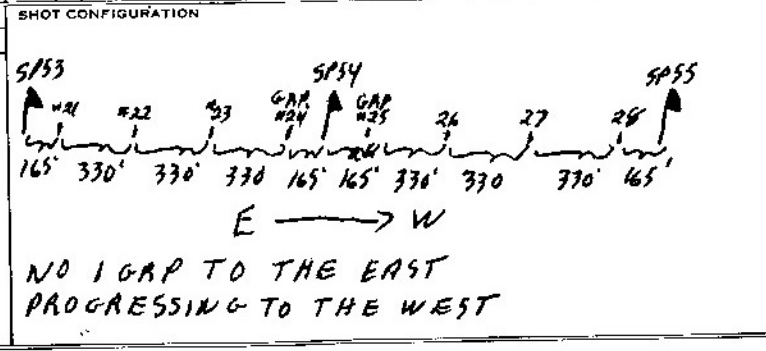

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT	30 DB
UPPER SET LIMIT	625 %
LOWER SET LIMIT	18 %
FORMAT TYPE:	<input type="checkbox"/> 9 TRACK <input checked="" type="checkbox"/> 21 TRACK
GALVO LEVEL:	1-24 21 DB AUX 21 DB
OTHER:	

MISCELLANEOUS INFORMATION:

REC# 351-360 DRD TEST
 REC# 361 PULSE TEST
 REC# 362- TEST TB.
 REC# 364-371 TEST TB'S
 TAPE # 182-76-4 AND # 182-76-5 (BAD PARITY)
 REC# 403- TEST TB.
 # 404- " "
 REC# 405- WHITE ONES - TAPE # 18276-6
 REC# 40 PULSE TEST