


CLIENT		PARTY NO./PROSPECT		COUNTRY		STATE		LEFT STORAGE		ARRIVED FIELD		LEFT FIELD		ARRIVED STORAGE		DATE		OBSERVER		PAGE																	
HUSKY		1182 NPR-4		USA		ALASKA		700		8:30		8:30				JAN 24/76		Vic Donald		1081																	
IDENTIFICATION				SHOT				SPREAD				TAPE				GAIN				FILTERS				REMARKS													
LINE	PROFILE	REEL NUMBER S14425	FILE NUMBER	SHOT CAL	PLAY BACK	TIME	SIZE	TOP BOT	NO CAPS	CODE	S.P. OFFSET	NO. DIR.	CODE	I	T	COP SWITCH	SETUP	SAMPLE RATE MS	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)					FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT		NOTCH IN OUT				
																						1-4/24	5-8		9-12	13-16/17-20					21-24	FREQ.		SLOPE			
D2	34	42762	143	A	RAW		25	50/60	2	0		S	D	5'		1/1	0	✓	6sec	OP		60	60	60	54	48	42	120	FAST	AUTO	124	8	36	OUT	START OF LINE WITH 24 GAP. TAILSPREAD		
	33		144				25	50/60	2							1/5						42	48	54	60	60											
	32		145				25	71/72	2							1/2																					
	31		146				25	50/60	2							1/13																					
	30		147				25	50/60	2							1/17																					
	29		150				25	12/23	2							1/21																					
	28		151				25	50/60	2							1/35																					
	27		152				25	50/60	2							1/29																					UPHOLE DEAD - TR# 46 SHORT
	26		153				25	50/60	2							1/33																					
	25		154				25	50/60	2							1/37																					
	24		155				25	50/60	2							1/41																					
	23		156				25	50/60	2							1/6																					
	22		157				25	50/60	2							1/49																					

SEISMOMETER AND SPREAD INFORMATION						
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
①	0-20 10 HZ GEO-SIAG	24 18	25'	INLINE 24/24 SPLIT	330'	48 GROUPS INLINE 24/24 SPLIT

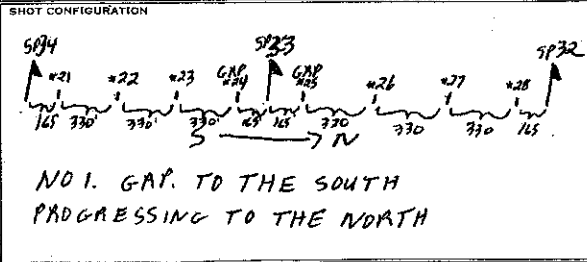

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT	30 DB
UPPER SET LIMIT	625 %
LOWER SET LIMIT	18 %
FORMAT TYPE:	<input type="checkbox"/> 9 TRACK <input checked="" type="checkbox"/> 21 TRACK
GALVO LEVEL:	1-24 21 DB AUX 21 DB
OTHER:	

MISCELLANEOUS INFORMATION:

REC# 130 → 140 PRO TEST
 REC# 141 PULSE TEST
 REC# 142 TEST TB.
 PICK-UP REMAINING CABLES ON LINE DS-3 AND COMPLETE LAYOUT ON DS-2.

CLIENT		PARTY NO. PROSPECT		COUNTY		STATE		COUNTRY		LEFT STORAGE		ARRIVED FIELD		LEFT FIELD		ARRIVED STORAGE		DATE		OBSERVER		PAGE												
HUSKY		1182 NPR-4		SITKONAN		ALASKA		USA		700		800		1000		1100		JAN 27/68		Vic Donald		1 of 1												
LINE	IDENTIFICATION			SHOT CAL	PLAY BACK	TIME	SIZE	SHOT		NO. CAPS	CODE	SPREAD				TAPE		GAIN						FILTERS		REMARKS								
	PROFILE	REEL NUMBER	FILE NUMBER					TOP	BOT.			S.P. OFFSET	NO. 1 DIR.	CODE	NO. 2 DIR.	NO. 3 DIR.	NO. 4 DIR.	CDP SWITCH	SETUP	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB)				FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT	NOTCH		
B-2	21	1140	122	A	APW	25	50/60	2	0	5	0	5'			1/17	0	6sec	OP	60	60	60	59	48	42	120	FAST	APW 576	124	8	36	OUT	ICE HOLE		
	20		123			25	50/60	2							1/21				42	48	54	60	60	60								ICE HOLE		
	19		174			25	50/60	2							1/25																	ICE HOLE		
	18		175			25	50/60	2							1/29																	" "		
	17		176			25	50/60	2							1/33																			
	16		177			25	50/60	2							1/37																			
	15		200			25	39/40	2							1/41																			
	14		201			25	50/60	2							1/45																		ICE HOLE	
	13		202			25	50/60	2							1/49																			
	12		204			25	50/60	2							1/5	0																	ICE HOLE	
	11		205			25	50/60	2							1/9																			
	10		206			25	50/60	2							1/13																			
	9		207			25	50/60	2							1/17																			TRACE 45 REVERSED
	8		210			25	50/60	2							1/21																			TRACE 41 REVERSED
	7		211			25	50/60	2							1/25																			TRACE 37 REVERSED
	6		212			25	50/60	2							1/29																			TR 33 REV
	5		213			25	50/60	2							1/33																			TR 39 REV
	4		214			25	50/60	2							1/37																			TR 25 REV
	3		215			25	50/60	2							1/41																			TR 31 REV
	2		216			25	50/60	2							1/45																			TR #17 REV
	1		217			25	50/60	2							1/49																			TR #19 REV TR #21 REV TR #43 REV TR #47 REV

TAPE CHANGE - END OF LINE D5-2

ICE HOLE

SEISMOMETER AND SPREAD INFORMATION				SHOT CONFIGURATION		DFS III SYSTEM PARAMETERS:		MISCELLANEOUS INFORMATION:			
CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN					
0	D-20	18	25'	INLINE	330'	48 GROUPS INLINE 24/24 SPLIT NO GAP	SP22	SP21	SP20	GAIN CONSTANT 70 DB UPPER SET LIMIT 62.5 % LOWER SET LIMIT 18 % FORMAT TYPE: <input type="checkbox"/> 9 TRACK <input checked="" type="checkbox"/> 21 TRACK GALVO LEVEL: 1-24 21 DB AUX 21 DB OTHER:	REC# 160 + 167 - DAD TEST REC# 170 PULSE TEST REC# 171 TEST TB REC# 203 - PULSE TEST
						<p>NO 1 GAP TO THE SOUTH PROGRESSING TO THE NORTH</p>					